



# **COXREELS**

**Offered By:**

**Dailey Supply**

**2955 West 17th Street, Suite 5**

**Erie, PA 16505**


**(814) 833-7227**

**[mike@daileysupply.com](mailto:mike@daileysupply.com)**

**HOSE, CORD & CABLE**

# REELS

**COXREELS SINCE 1923**

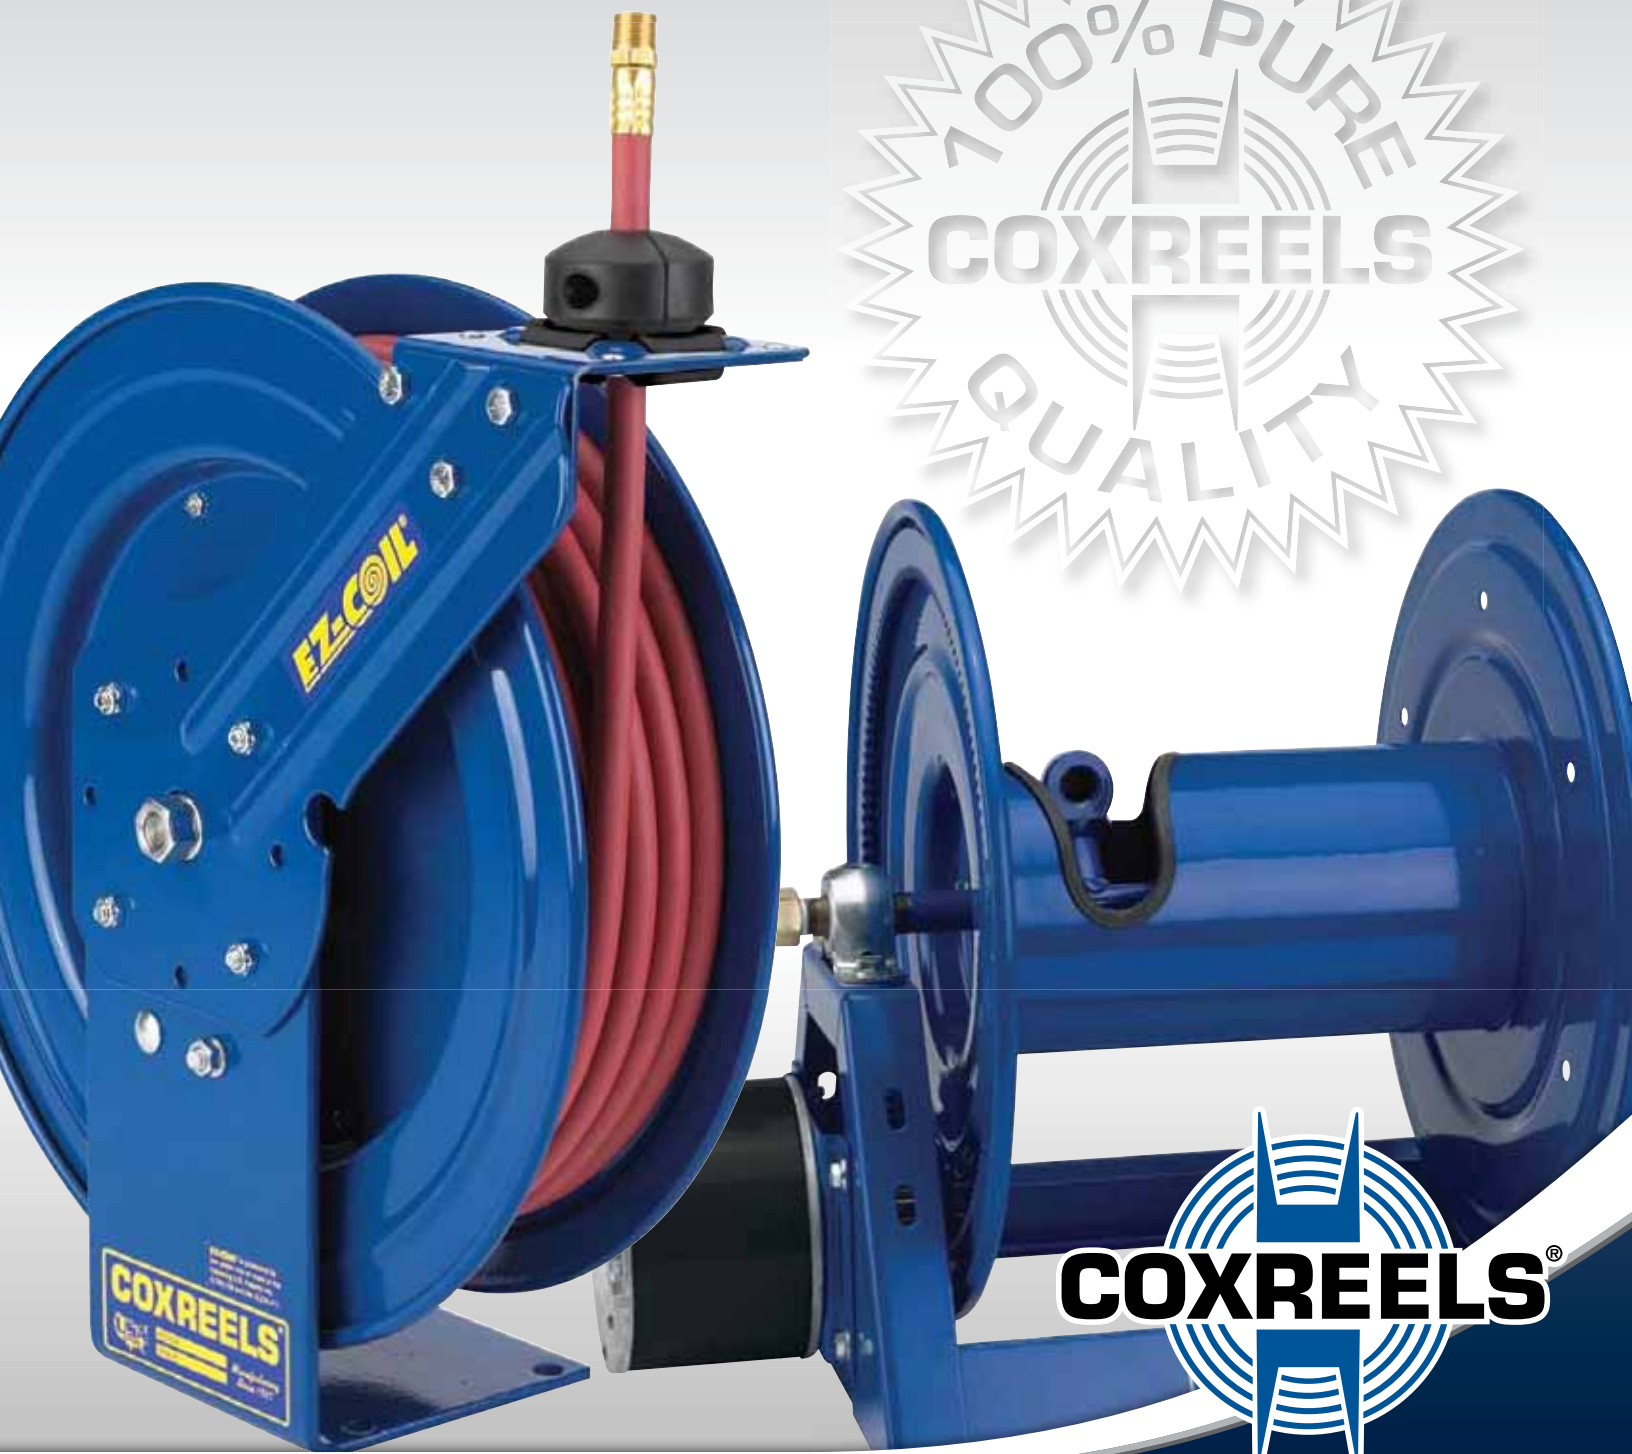


***Your Reel Source***



# OUR MISSION

## WE WILL LEAD THE INDUSTRY IN QUALITY & INNOVATION

We know that there can be no compromise when you live the philosophy of building the best! Every decision regarding our product design is made with one unwavering goal...



**TO MAKE THE REQUIRED PRODUCT THE VERY BEST IT CAN BE.**


# YOUR REEL SOURCE

## A HIGHER LEVEL OF STANDARDS



### CPCT™ POWDER COAT

Our blue powder coat finish that is long lasting, chip resistant & rust inhibiting



### BRASS SWIVEL

External fluid path, machined from solid brass, full flow, swivel for simple seal maintenance



### STEEL AXLE

1" solid steel axle and lubricated bearings for extra strength & durability. Not a hollow tube & no fluid travels through it



### CNC SPUN DISCS

All steel rolled edges & ribbed discs for added safety, strength & durability



### CARTRIDGE MOTOR

Enclosed factory tuned & matched cartridge style motor for safe & easy replacement



### EZ-COIL® SERIES

A patented safety system that retracts up to 80% slower than conventional reels



## SPRING DRIVEN REELS OVERVIEW

	MATERIAL	LENGTH	MAX
GENERAL:	HOSE I.D. ¼" – ½"	15' – 100'	300 – 5,000 PSI
FUEL:	HOSE I.D. ½" – 1"	25' – 75'	300 PSI
WELDING HOSE:	HOSE I.D. ¼"	25' – 100'	200 PSI
WELDING CABLE:	CABLE GA: #6 – #2/0	25' – 50'	75 AMPS – 450 AMPS

	MATERIAL	LENGTH	MAX
ELECTRICAL:	CORD GA: 10 – 16 GA	30' – 100'	13 – 35 AMPS
STATIC DISCHARGE:	CABLE SIZE: 5/32"	35' – 100'	50 – 100 AMPS
VACUUM:	HOSE I.D. 1½"	25'	29" HG





# Dear Valued Customer,

Thank you for choosing COXREELS!

Entering into our 9th decade under the 3rd generation of family ownership and operation, we are proud to manufacture the industry's highest quality and widest variety of hose, cord, and cable reels. We remain aware that our products are called on to be the most reliable product built to faithfully perform in various settings and applications.

Our team takes great pride in our growth and innovation as a U.S. manufacturer. We recognize USA Made, USA Quality, and USA Support as critical components to delivering incomparable product value. These founding principles are displayed and reflected in each model and every part of the Coxreels product

line! Our advanced engineering and manufacturing processes make extensive use of in-house design, CNC machinery with robotic welding and robotic spin cell operations, and modern automation systems that allow us to develop and build state-of-the-art reeling platform solutions that meet the most demanding requirements in the industry.

In these pages you will see the quality, variety, value and innovation that has made us a world leading reel manufacturer. Over 80 years as the industry leader proves that constant learning and communication with the industries we serve, innovative engineering and the highest standards in quality and service ensure we will continue to innovate with new proprietary technologies, superior special

features and superior products that set the bar in the reel industry.

I also would like to offer my thanks to all of our customers who are the cornerstone of this business. It is with your support that we drive our position of leadership and innovation to new heights each and every year.


Sincerely,

*Brad Cox*  
Brad Cox :: President



## SUPER HUB

1/4" steel frame & support arm with dual axle support with SUPER HUB™ for increase strength & durability



## LOW PROFILE RISER

Low profile riser with open drum slot allows for smooth even hose wraps that will not pinch or bind your hose. **NO HUMP!**



## ALL WELDED STEEL "A" FRAME

All welded steel "A" frame for strength & durability. **NOT BOLTED!**



## DIRECT DRIVE MOTORS

A solid steel halo is welded to the disc for a direct gear driven motor



## 2 YEAR WARRANTY

Coxreels proudly stands behind our reels as they are built to last!



## USA MADE, QUALITY & SUPPORT

We take great pride in designing, building and supplying the world's finest reels made right here in the U.S.A.



## HAND CRANK & MOTORIZED REELS OVERVIEW

	MATERIAL	LENGTH	MAX
<b>GENERAL:</b>	HOSE I.D. 3/8" – 2"	50' – 700'	600 – 10,000 PSI
<b>WELDING GAS</b>	HOSE I.D. 1/4" – 3/8"	50' – 250'	200 PSI
<b>WELDING CABLE</b>	CABLE GA: #2 - #2/0	100' – 600'	450 AMPS

	MATERIAL	LENGTH	MAX
<b>STATIC DISCHARGE</b>	CABLE SIZE: 5/32"	200' – 250'	50 – 100 AMPS
<b>ELECTRICAL:</b>	CORD GA: 10 -12 GA	200' – 250'	30 – 45 AMPS
<b>VACUUM:</b>	HOSE I.D. 1 1/2"	50'	29" HG





## OUR MISSION

MESSAGE FROM THE PRESIDENT ..... pg **2-3**

## HOW TO ORDER

TO GET THE PERFECT REEL ..... pg **6**

## SPRING DRIVEN

**EZ-COIL®** & FEATURE FOCUS..... pg **7-9**

## SPRING DRIVEN

REELS..... pg **10-33**

## HAND CRANK & MOTOR DRIVEN

FEATURE FOCUS ..... pg **34-35**

## HAND CRANK & MOTOR DRIVEN










REELS..... pg **36-49**

## SPRING DRIVEN

ACCESSORIES ..... pg **50-51**

## HAND CRANK & MOTOR DRIVEN

ACCESSORIES ..... pg **50-53**

SERIES	PAGE	SPRING DRIVEN	HAND CRANK	MOTORIZED	HOSE I.D. / CORD GA	MAX PSI / AMPS
 <b>LG Series</b> Compact hose reels	<b>10</b>	•			1/4" - 3/8"	300
 <b>P / EZ-P Series</b> Performance hose reels	<b>11</b>	•			1/4" - 1/2"	Up to 5000
 <b>SH / EZ-SH Series</b> Heavy duty Super Hub™ hose reels	<b>12</b>	•			1/4" - 3/4"	Up to 5000
 <b>T / EZ-T Series</b> Supreme duty "truck mount" reels with Super Hub™ & a full frame	<b>13</b>	•			1/4" - 1"	Up to 5000
 <b>C Series</b> "2 in 1" hose reels	<b>14</b>	•			1/4" - 1/2"	Up to 5000
 <b>C Air/Electric Series</b> "2 in 1" hose & cord reels	<b>15</b>	•			3/8" 12-16 GA	Up to 300 / 25A
 <b>EN / EZ-EN Series</b> Enclosed hose reels	<b>16</b>	•			1/4" - 1/2"	Up to 5000
 <b>E / EZ-E Series</b> Expandable bank system hose reels	<b>17</b>	•			1/4" - 1/2"	Up to 5000
 <b>S / EZ-S Series</b> Side mount hose reels	<b>18</b>	•			1/4" - 1/2"	Up to 5000
 <b>SG / EZ-SG Series</b> Side mount hose reels with guide arm	<b>19</b>	•			1/4" - 1/2"	Up to 5000

SERIES	PAGE	SPRING DRIVEN	HAND CRANK	MOTORIZED	HOSE I.D. / CORD GA	MAX PSI / AMPS
 <b>SP Series</b> Single high capacity hose reels	<b>20</b>	•			1/2" - 1-1/2"	Up to 2500
 <b>DP Series</b> Dual high capacity hose reels	<b>21</b>	•			3/8" - 3/4"	Up to 3000
 <b>300 Series</b> Exhaust hose reels	<b>22</b>	•			4" - 6"	-
 <b>V Series</b> Vacuum hose reels	<b>23</b>	•			1-1/2"	-
 <b>P-W &amp; SH-W / EZ-PW &amp; EZ-SHW Series</b> Welding hose reels	<b>24</b>	•			1/4"	200
 <b>SW Series</b> Side mount welding hose reels	<b>18</b>	•			1/4"	200
 <b>SGW / EZ-SGW Series</b> Side mount welding reels with guide arm	<b>19</b>	•			1/4"	200
 <b>P-WC Series</b> Welding cable reels	<b>25</b>	•			#2/0 GA - #6 GA	Up to 450A
 <b>PC10 Series</b> Compact power cord reels	<b>26</b>	•			12 GA - 16 GA	Up to 20A
 <b>PC Series</b> Power cord reels	<b>27</b>	•			10 GA - 16 GA	Up to 35A

SERIES	PAGE	SPRING DRIVEN	HAND CRANK	MOTORIZED	HOSE I.D. / CORD GA	MAX PSI / AMPS
 <b>SD &amp; SDH / EZ-SD Series</b> Static discharge cable reels	<b>28</b>	•	•		3/32"	Up to 100A
 <b>Nitro-Pro &amp; Alumi-Pro Series</b> Aluminum hose reels & nitrogen hose reels	<b>29</b>	•			1/4" - 1/2"	300
 <b>Pure Flow Series</b> Breathing air & clean fluid hose reels	<b>30</b>	•	•	•	3/8" - 1/2"	Up to 6000
 <b>MPD, TDMP &amp; 1275HP Series</b> Dual hydraulic hose reels	<b>31</b>	•	•	•	1/4" - 1/2"	Up to 10000
 <b>SS P, SH, T &amp; EN Series</b> Stainless steel hose reels	<b>32</b>	•			3/8" - 3/4"	Up to 3000
 <b>DEF &amp; Fuel Series</b> DEF and fuel hose reels	<b>33</b>	•			1/2" - 1"	300
 <b>100 Series</b> Compact hose reels	<b>36</b>		•		3/8" - 3/4"	Up to 4000
 <b>CM &amp; DM Series</b> Portable hose reels	<b>37</b>		•		3/8" - 1/2"	Up to 4000
 <b>SM Series</b> Swivel mount hose reels	<b>38</b>		•		3/8"-1/2"	Up to 4000
 <b>112Y Series</b> Compact hose, cord & cable storage reels	<b>39</b>		•		3/8" - 1/2" 8GA - 16GA	-

SERIES	PAGE	SPRING DRIVEN	HAND CRANK	MOTORIZED	HOSE I.D. / CORD GA	MAX PSI / AMPS
 <b>1125 Series</b> Hand crank & motor driven hose reels	<b>40</b>		•	•	3/8" - 1"	Up to 5000
 <b>1175 Series</b> Hand crank & motor driven hose reels	<b>41</b>		•	•	3/4" - 1"	Up to 3000
 <b>1185 Series</b> Large capacity / volume hose reels	<b>42</b>		•	•	1-1/4" - 1-1/2"	Up to 3000
 <b>1195 Series</b> Large capacity / volume hose reels	<b>43</b>		•	•	1-1/2" - 2"	Up to 600
 <b>1275 Series</b> Large capacity dual hose reels	<b>44</b>		•	•	1/2"-1"	Up to 3000
 <b>100W &amp; 1275W-C Series</b> Large capacity welding hose reels	<b>45</b>		•	•	1/4" - 3/8"	200
 <b>100WCL &amp; 1125WCL Series</b> Welding cable reels	<b>46</b>		•	•	#2/0GA- #2GA	Up to 450A
 <b>1125PCL Series</b> Large capacity power cord reels	<b>47</b>		•	•	10GA - 12GA	Up to 45A
 <b>SS 100, 1125 &amp; 1175 Series</b> Stainless steel hose reels	<b>48</b>		•	•	3/8" - 1"	Up to 4000
 <b>Storage Series</b> Large capacity hose, cord & cable storage reels	<b>49</b>		•	•	1/4" - 1-1/2"	-

# HOW TO ORDER

## SELECTING THE PROPER REEL

The size, length and type of hose to be handled are primary factors in selecting the proper reel for your job. The following points should be considered:

### 1. HOSE I.D., O.D. & LENGTH

When space permits, select a reel with greater hose capacity than you require. This allows you to rewind the hose with less care and keeps the hose well protected within the disc dimension, even if the hose is not wound in uniform coils. (See hose selection chart below)

### 2. SIZE & TYPE OF SWIVEL JOINT & SEAL FOR INLET & OUTLET

In selecting your reel please note the size of your hose versus the inlet and outlet sizes. Reducing your fitting & hose size will allow for more hose capacity. Please refer to the o-ring seal compatibility chart on page 50 for special application requirements.

### 3. RETRACTION METHOD & PROPER USE

Choose from Spring Driven, Hand Crank or Motor Driven retraction.

**SPRING DRIVEN:** Automatic rewind requiring no power source. Operator is to guide the hose or cord as it self-retracts and wraps around the drum.

**For models to be mounted 15 feet above the floor, consult factory & specify on P.O.'s for proper spring retraction motor.**

**HAND CRANK:** Operator must manually crank the reel and guide the hose or cord evenly as it wraps around the drum to reach full capacity.

**MOTOR DRIVEN:** Requires a power source to operate in AC, DC, Air or Hydraulic power. On/Off switches and speed controllers are available to help control retraction speed. You must guide the hose or cord efficiently back on the reel to reach full capacity.

### 4. MOUNTING POSITION

Determine which mounting position you require. All reels are shipped in the floor-ceiling mount (FM) position with the exception of the "T," "EN," and "SD" Series, which are shipped in the wall-truck mount (WM) position. See diagram to the right for the "SP & DP" Series as well.

### 5. CHOOSE TYPE OF HOSE

Consider temperature, product type and pressure required (PSI).

Always use good quality hose rated for the service and operating pressure required. Poor quality hose tends to expand and contract under pressure surges. When this happens, hose remaining on the reel may bind and become difficult to handle. In extreme cases, poor quality hose may expand under pressure to the extent that the reel becomes distorted and inoperable.

### 6. ADDITIONAL OPTIONS

**Customize your reel to meet your exact requirements.** Once you select your reel type consider the different add-on features such as roller brackets, special mounting brackets, carry handles or a cart for portability. See the options available indicated on each page.

### E-MAIL INFORMATION


If you would like more information, feel free to e-mail us concerning your order or general questions you may have.

For general info or questions:  
[info@coxreels.com](mailto:info@coxreels.com)

For technical assistance:  
[techassist@coxreels.com](mailto:techassist@coxreels.com)

## BASIC INFORMATION


The Diagram Below Indicates The Basic Information Which Should Be Determined Before Ordering.

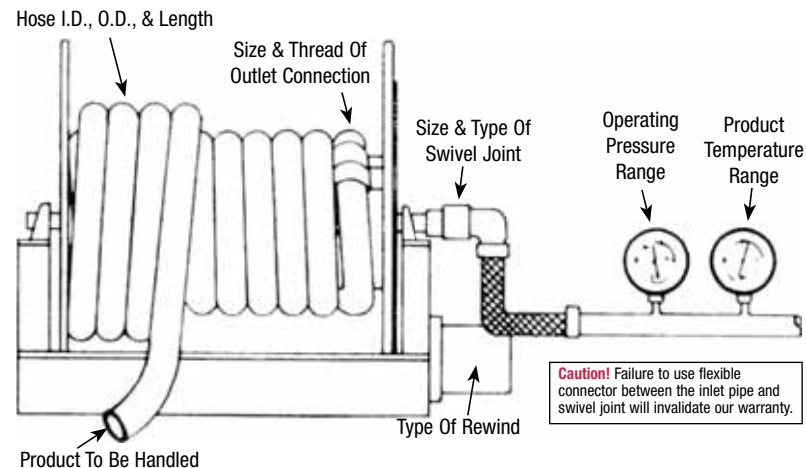

## MOUNTING POSITIONS


The Diagrams Below Indicate The Mounting Positions Which Should Be Determined Before Ordering.

**ALL MODELS** with the exception of the SP & DP Series




**"FM"** Floor-Ceiling Mount

All reels are shipped in this position unless specified with the exception of the T, EN, SD, SP & DP Series




**"WM"** Wall-Truck Mount

T, EN & SD Series are shipped in this position unless specified



**"BM"**

Bottom-Truck Mount




**"DM"**

Down Mount


## HOSE SELECTION

The drawing below shows two reels with different shapes and dimensions but with identical hose capacity. In most cases, more than one reel will handle the size and length of hose you need, so you can specify a reel to fit your space requirements.

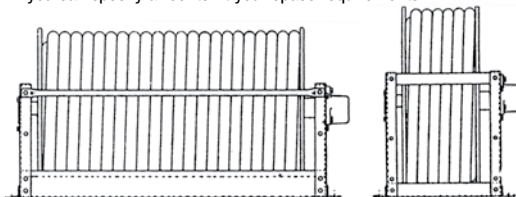


See Page 50 For Hose Assemblies & Component Parts

## SP & DP SERIES




**"FM"** Floor-Ceiling Mount (Drag)


All SP & DP Series are shipped in this position unless specified



**"CM"** Ceiling Mount  
(Lift, Stretch Or Recover)




**"WM"** Wall Mount  
(Lift)




**DRAG**

With Roller Guide




**LIFT**

With Roller Guide



**STRETCH**

With Or Without Roller Guide  
Special Spring Motor Required,  
Consult Factory



**RECOVER**

(Pick-up) No Roller Guide Needed,  
Special Spring Motor Required,  
Consult Factory



# EZ-COIL®

## SAFETY CONTROLLED RETRACTION

COXREELS Safety Series reels featuring the patented EZ-Coil® Rewind Safety System, engineered and developed exclusively by Coxreels, are the only choice for safe spring driven hose, cord and cable reel operation in the workplace. EZ-Coil® works uni-directionally without any increase to the amount of resistance when pulling out the hose, cord or cable. But, when engaged upon recoil, it controls the aggressive spring motor energy resulting in a reel that retracts at a safe and steady pace. Upgrade your workplace with EZ-Coil® equipped professional grade industrial hose, cord, and cable reels!

### INCREASED SAFETY HOW?

- ▶ Reduce retraction speed by up to 80%
- ▶ Control hose or cord whip hazard
- ▶ Requires no external power source
- ▶ Enhance operator and workplace safety
- ▶ Keep your workplace organized
- ▶ Utilize space and maximize efficiency
- ▶ Improve hose, cord & cable management
- ▶ Extend longevity of hose, cord & cable
- ▶ Increase productivity

COXREELS  
**EZ-COIL®**

LET'S COMPARE	SPEED	WHIPPING	IMPACT
<b>EZ-COIL®</b> Up To 80% Slower Retraction	5 ft./sec.	0 to 1 ft.	0 to 1 ft./lbs.
<b>Conventional SPRING DRIVEN REELS</b>	25 ft./sec.	5 to 15 ft.	500 ft./lbs.

Based on an independent evaluation performed by Coxreels.  
Depending on certain conditions, results may vary.



Go online to view **EZ-COIL®**  
catalog & videos of features & benefits  
at [www.COXREELS.com](http://www.COXREELS.com)



SPRING DRIVEN

### PROFESSIONAL GRADE FEATURES :: HOSE REELS



Go online to view videos  
of features & benefits  
[www.COXREELS.com](http://www.COXREELS.com)

**Adjustable solid rubber hose stop**  
for lead length positioning

**Versatile guide arm** adjusts to wall, floor,  
ceiling & vehicle mounting

**External fluid path with machined from solid  
brass 90° full-flow NPT swivel** that screws  
directly on 1" solid steel axle, for simple seal  
maintenance and fast and easy hose installation

**High quality steel construction** with our durable  
CPC™ powder coat finish

**Heavy duty spun discs** with rolled edges  
for greater strength, made with first of it's  
kind CNC robotic spin cell

**Enclosed factory tuned and matched cartridge-  
style spring motor** for safe and easy maintenance


**Heavy gauge 1/4" steel base & support  
post** for maximum stability

**ALSO AVAILABLE WITH STAINLESS STEEL**  
construction & swivel


**SUPER HUB™ EQUIPPED MODELS:**  
**INCREASED REEL STRENGTH** for more demanding  
applications with multiple support to the axle



Double axle support on  
SH, MP & HP Series



Triple axle support with Super Hub™  
& a full frame on T Series



**MIRROR YOUR REEL**  
Reverse your reel with suffix option **-BXR**



# CORD REELS :: PROFESSIONAL GRADE FEATURES

SPRING DRIVEN



*Versatile guide arm* adjusts to wall, floor, ceiling & vehicle mounting

*Adjustable solid rubber hose stop* for lead length positioning

*Heavy duty spun discs* with rolled edges for greater strength, made with first of it's kind CNC robotic spin cell


*Heavy gauge powder coated steel components* cover protecting the slip ring & all electrical components

*High quality steel construction* with our durable CPC™ powder coat finish

*Includes 5' lead cable & grounding plug*  
(Except on less cord models)

*Enclosed factory tuned and matched cartridge-style spring motor* for safe and easy maintenance  
(Located under protective component cover)

*Choice of electrical accessories*

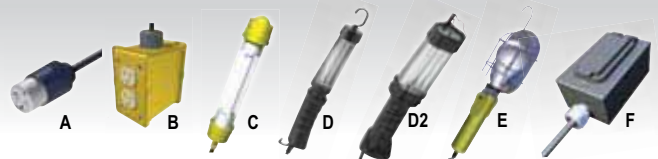



# LG SERIES *COMPACT EFFICIENT HOSE & TUBING REELS*



**COXREELS® LG Series “Little Giant” is the first lightweight - heavy duty reel on the market.** The LG is perfect for commercial or industrial applications where space or budget is limited. It is extremely lightweight and compact and can install almost anywhere. This little giant can accept either a 1/4" or 3/8" hose to tackle the jobs of reels almost double its size.

## LOW PRESSURE


Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
**Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>LG-LP-115</b>	1/4"	1/2"	15	300	9	<b>LG-LPL-115</b>	8	<b>1</b>
<b>LG-LP-125</b>	1/4"	1/2"	25	300	11	<b>LG-LPL-125</b>	8	<b>1</b>
<b>LG-LP-310</b>	3/8"	5/8"	10	300	9	<b>LG-LPL-310</b>	8	<b>1</b>
<b>LG-LP-320</b>	3/8"	5/8"	20	300	11	<b>LG-LPL-320</b>	8	<b>1</b>

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	5 1/4"	10 5/8"	10 1/2"	4 11/16"	8 3/8"	2 1/2"	6"
Overall Dimensions				Base		Mounting Pattern	

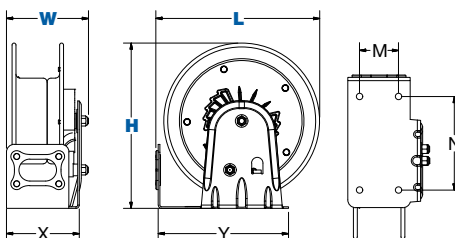

## LG SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Compact & lightweight spring driven hose reel save space & facilitate workplace organization
- CoxComposite™ grommet with continuous radius design that does not pinch or catch the hose during operation
- Solid one piece, 12GA steel base & support post for maximum stability
- 1/2" solid steel axle & lubricated precision bearings for smooth rotation
- Designed for lightweight PVC hose & tubing

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive CoxComposite™ ratchet hub with self lubricating bronze bearings secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Pneumatic Tools
- Machine Shops
- Tubing Applications
- Maintenance, Repair & Operations
- Washdown
- Service / Mechanic / Utility Vehicles
- General Commercial & Industrial
- Bench Mount

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Assorted Reel Accessories

## COXREELS® LG FEATURES



### CoxComposite™ Hub Features

- Integrates High-Strength Composite With Self Lubricating Bronze Bearing
- Over 100% More Impact Strength Than Typical Glass Filled Polypropylene Used In Other Reels
- Strength Actually Increases By 20% At Sub-Zero Temperatures (Actual Test Results Measured At -40°C)
- Excellent Chemical Resistance

## COXREELS® LG FEATURES



### CoxComposite™ Grommet Features

- Continuous Radius Design Allows The Use Of Various Size Tubing In Addition To Standard Hose Sizes
- Absolutely No Pinching & No Place To Catch
- Bearing Grade, FDA-Compliant Composite
- Excellent Chemical Resistance

# PERFORMANCE HOSE REELS **P SERIES**

**COXREELS® P Series "Performance" spring driven hose reels have a long history of dependability and trouble free performance.** Their compact space-saving size and heavy duty construction make them highly versatile and virtually indestructible. Time-tested proven components, superior design and craftsmanship have contributed to it's worldwide reputation as the most trusted hose reel.

## LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
**Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>P-LP-125</b>	1/4"	1/2"	25	300	27	<b>EZ-P-LP-125</b>	<b>P-LPL-125</b> 24	<b>1</b>
<b>P-LP-130</b>	1/4"	1/2"	30	300	27	-	<b>P-LPL-130</b> 24	<b>1</b>
<b>P-LP-135</b>	1/4"	1/2"	35	300	28	<b>EZ-P-LP-135</b>	<b>P-LPL-135</b> 25	<b>1</b>
<b>P-LP-140</b>	1/4"	1/2"	40	300	38	-	<b>P-LPL-140</b> 34	<b>3</b>
<b>P-LP-150</b>	1/4"	1/2"	50	300	40	<b>EZ-P-LP-150</b>	<b>P-LPL-150</b> 35	<b>3</b>
<b>P-LP-325</b>	3/8"	5/8"	25	300	28	<b>EZ-P-LP-325</b>	<b>P-LPL-325</b> 25	<b>2</b>
<b>P-LP-330</b>	3/8"	5/8"	30	300	37	<b>EZ-P-LP-330</b>	<b>P-LPL-330</b> 33	<b>3</b>
<b>P-LP-335</b>	3/8"	5/8"	35	300	38	<b>EZ-P-LP-335</b>	<b>P-LPL-335</b> 34	<b>3</b>
<b>P-LP-340</b>	3/8"	5/8"	40	300	39	-	<b>P-LPL-340</b> 34	<b>3</b>
<b>P-LP-350</b>	3/8"	5/8"	50	300	43	<b>EZ-P-LP-350</b>	<b>P-LPL-350</b> 36	<b>3</b>
<b>P-LP-415</b>	1/2"	3/4"	15	300	41	-	<b>P-LPL-415</b> 38	<b>4</b>
<b>P-LP-425</b>	1/2"	3/4"	25	300	44	-	<b>P-LPL-425</b> 39	<b>4</b>
<b>P-LP-430</b>	1/2"	3/4"	30	300	45	<b>EZ-P-LP-430</b>	<b>P-LPL-430</b> 40	<b>4</b>
<b>P-LP-450</b>	1/2"	3/4"	50	300	48	<b>EZ-P-LP-450</b>	<b>P-LPL-450</b> 43	<b>4</b>

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

## MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>P-MP-320</b>	3/8"	1 1/16"	20	3000	46	-	<b>P-MPL-320</b> 41	<b>4</b>
<b>P-MP-325</b>	3/8"	1 1/16"	25	3000	49	-	<b>P-MPL-325</b> 42	<b>4</b>
<b>P-MP-330</b>	3/8"	1 1/16"	30	3000	51	-	<b>P-MPL-330</b> 43	<b>4</b>
<b>P-MP-335</b>	3/8"	1 1/16"	35	3000	52	-	<b>P-MPL-335</b> 43	<b>4</b>
<b>P-MP-420</b>	1/2"	1 3/16"	20	2500	47	-	<b>P-MPL-420</b> 41	<b>4</b>
<b>P-MP-425</b>	1/2"	1 3/16"	25	2500	49	<b>EZ-P-MP-425</b>	<b>P-MPL-425</b> 42	<b>4</b>
<b>P-MP-430</b>	1/2"	1 3/16"	30	2500	51	<b>EZ-P-MP-430</b>	<b>P-MPL-430</b> 43	<b>4</b>

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

## HIGH PRESSURE

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>P-HP-120</b>	1/4"	9/16"	20	5000	46	-	<b>P-HPL-120</b> 41	<b>4</b>
<b>P-HP-125</b>	1/4"	9/16"	25	5000	48	<b>EZ-P-HP-125</b>	<b>P-HPL-125</b> 42	<b>4</b>
<b>P-HP-130</b>	1/4"	9/16"	30	5000	50	-	<b>P-HPL-130</b> 43	<b>4</b>
<b>P-HP-135</b>	1/4"	9/16"	35	5000	51	-	<b>P-HPL-135</b> 43	<b>4</b>
<b>P-HP-320</b>	3/8"	1 1/16"	20	4000	47	-	<b>P-HPL-320</b> 41	<b>4</b>
<b>P-HP-325</b>	3/8"	1 1/16"	25	4000	49	<b>EZ-P-HP-325</b>	<b>P-HPL-325</b> 42	<b>4</b>
<b>P-HP-330</b>	3/8"	1 1/16"	30	4000	51	-	<b>P-HPL-330</b> 43	<b>4</b>

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

## REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	57 7/8"	14 7/8"	13 1/2"	5"	6"	3"	5"
<b>2</b>	61 1/2"	14 7/8"	13 1/2"	5"	6"	3"	5"
<b>3</b>	63 3/4"	18 5/8"	17 1/8"	6"	6"	4"	5"
<b>4</b>	7"	18 5/8"	17 1/8"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern



## P SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Sturdy single pedestal reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Controlled retraction speed up to 80% slower on **EZ-Coil®** models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

## SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive & Fleet Service Centers

## ACCESSORIZE YOUR REEL :: Pg 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories



# SH, MP & HP SERIES HEAVY DUTY HOSE REELS



Double axle support with Super Hub™

## SH, MP & HP SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Sturdy single pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Controlled retraction speed up to 80% slower on **EZ-COIL** models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Service / Mechanic / Utility Vehicles
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive & Fleet Service Centers

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

**COXREELS® SH Series "Super Hub™" spring driven hose reels, like the P Series, have a long history of dependable performance.** The larger chassis and frame accommodate longer lengths and larger diameters of hose. Coxreels' original Super Hub™ dual axle support system increases the stability during operation, reduces vibration and strengthens the structural integrity of the reel.

### LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN <b>EZ-COIL</b>	MODEL	APRX. LBS.	
SH-N-160	1/4"	1/2"	60	300	50	-	SHL-N-160	45	1
SH-N-350	3/8"	5/8"	50	300	50	<b>EZ-SH-350</b>	SHL-N-350	44	2
SH-N-360	3/8"	5/8"	60	300	53	-	SHL-N-360	46	2
SH-N-375	3/8"	5/8"	75	300	68	<b>EZ-SH-375</b>	SHL-N-375	59	3
SH-N-3100	3/8"	5/8"	100	300	71	<b>EZ-SH-3100</b>	SHL-N-3100	60	3
SH-N-435	1/2"	3/4"	35	300	49	-	SHL-N-435	43	2
SH-N-440	1/2"	3/4"	40	300	52	-	SHL-N-440	45	2
SH-N-450	1/2"	3/4"	50	300	54	<b>EZ-SH-450</b>	SHL-N-450	46	2
SH-N-475	1/2"	3/4"	75	300	68	<b>EZ-SH-475</b>	SHL-N-475	57	4
SH-N-4100	1/2"	3/4"	100	300	81	<b>EZ-SH-4100</b>	SHL-N-4100	66	4
SH-N-525	3/4"	1 1/16"	25	300	52	<b>EZ-SH-525</b>	SHL-N-525	45	5
SH-N-535	3/4"	1 1/16"	35	300	57	-	SHL-N-535	47	5
SH-N-550	3/4"	1 1/16"	50	300	69	<b>EZ-SH-550</b>	SHL-N-550	56	6

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

### MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 250° F. Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN <b>EZ-COIL</b>	MODEL	APRX. LBS.	
MP-N-340	3/8"	1 1/16"	40	3000	63	-	MPL-N-340	53	2
MP-N-350	3/8"	1 1/16"	50	3000	65	<b>EZ-MP-350</b>	MPL-N-350	53	2
MP-N-435	1/2"	1 3/16"	35	2500	61	-	MPL-N-435	51	2
MP-N-440	1/2"	1 3/16"	40	2500	62	-	MPL-N-440	51	2
MP-N-450	1/2"	1 3/16"	50	2500	67	<b>EZ-MP-450</b>	MPL-N-450	53	7
MP-N-525	3/4"	1 1/16"	25	1500	61	-	MPL-N-525	51	5
MP-N-535	3/4"	1 1/16"	35	1500	68	-	MPL-N-535	54	5

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

### HIGH PRESSURE

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN <b>EZ-COIL</b>	MODEL	APRX. LBS.	
HP-N-140	1/4"	9/16"	40	5000	62	-	HPL-N-140	53	7
HP-N-150	1/4"	9/16"	50	5000	64	<b>EZ-HP-150</b>	HPL-N-150	53	7
HP-N-160	1/4"	9/16"	60	5000	70	-	HPL-N-160	56	7
HP-N-335	3/8"	1 1/16"	35	4000	61	-	HPL-N-335	52	7
HP-N-340	3/8"	1 1/16"	40	4000	64	-	HPL-N-340	54	7
HP-N-350	3/8"	1 1/16"	50	4000	65	<b>EZ-HP-350</b>	HPL-N-350	53	8

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

### REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	7 5/8"	21 1/4"	19 1/2"	6"	6"	4"	5"
2	8 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
3	8 1/4"	21 1/4"	24"	6"	6"	4"	5"
4	8 3/4"	25 1/2"	24"	6"	6"	4"	5"
5	9 3/8"	25 1/2"	19 1/2"	6"	6"	4"	5"
6	9 1/8"	25 1/2"	24"	6"	6"	4"	5"
7	8 3/4"	25 1/2"	19 1/2"	6"	6"	4"	5"
8	9 1/4"	25 1/2"	19 1/2"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern





# SUPREME DUTY HOSE REELS T SERIES

**COXREELS® T Series "Truck Mount" spring driven hose reels are the toughest hose reels in the spring driven line.** The extra large chassis with dual pedestal-style arms and Coxreels' Super Hub™ provides triple axle support while reducing vibration and strengthening the structural integrity of the reel. Making it perfect for off-road applications that demand reliability in the most abusive and demanding environments.

## LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
TSH-N-350	3/8"	5/8"	50	300	61	EZ-TSH-350	TSHL-N-350	55	1
TSH-N-375	3/8"	5/8"	75	300	82	EZ-TSH-375	TSHL-N-375	73	2
TSH-N-3100	3/8"	5/8"	100	300	85	EZ-TSH-3100	TSHL-N-3100	74	2
TSH-N-3125	3/8"	5/8"	125	300	103	-	TSHL-N-3125	90	2
TSH-N-450	1/2"	3/4"	50	300	63	EZ-TSH-450	TSHL-N-450	55	1
TSH-N-475	1/2"	3/4"	75	300	82	EZ-TSH-475	TSHL-N-475	71	2
TSH-N-4100	1/2"	3/4"	100	300	95	EZ-TSH-4100	TSHL-N-4100	80	2
TSH-N-535	3/4"	1 1/16"	35	300	77	EZ-TSH-535	TSHL-N-535	67	3
TSH-N-550	3/4"	1 1/16"	50	300	83	EZ-TSH-550	TSHL-N-550	70	3
TSH-N-575	3/4"	1 1/16"	75	300	93	-	TSHL-N-575	73	4
TSH-N-635	1"	1 1/2"	35	300	92	-	TSHL-N-635	71	5
TSH-N-650	1"	1 1/2"	50	300	98	-	TSHL-N-650	77	4

To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

## MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications.  
Maximum temperature 250° F. Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
TMP-N-350	3/8"	1 1/16"	50	3000	74	EZ-TMP-350	TMPL-N-350	61	1
TMP-N-375	3/8"	1 1/16"	75	3000	99	EZ-TMP-375	TMPL-N-375	80	2
TMP-N-3100	3/8"	1 1/16"	100	3000	106	-	TMPL-N-3100	82	2
TMP-N-450	1/2"	1 3/16"	50	2500	77	EZ-TMP-450	TMPL-N-450	64	1
TMP-N-475	1/2"	1 3/16"	75	2500	100	EZ-TMP-475	TMPL-N-475	80	2
TMP-N-4100	1/2"	1 3/16"	100	2500	106	-	TMPL-N-4100	80	2
TMP-N-525	3/4"	1 1/16"	25	1500	67	-	TMPL-N-525	57	6
TMP-N-535	3/4"	1 1/16"	35	1500	88	-	TMPL-N-535	74	3
TMP-N-550	3/4"	1 1/16"	50	1500	94	EZ-TMP-550	TMPL-N-550	74	3
TMP-N-575	3/4"	1 1/16"	75	1500	100	-	TMPL-N-575	77	7
TMP-N-650	1"	1 3/8"	50	1250	116	-	TMPL-N-650	81	7

To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

## HIGH PRESSURE

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
THP-N-150	1/4"	9/16"	50	5000	74	EZ-THP-150	THPL-N-150	62	1
THP-N-175	1/4"	9/16"	75	5000	88	EZ-THP-175	THPL-N-175	71	2
THP-N-1100	1/4"	9/16"	100	5000	104	EZ-THP-1100	THPL-N-1100	82	2
THP-N-350	3/8"	1 1/16"	50	4000	78	EZ-THP-350	THPL-N-350	66	1
THP-N-375	3/8"	1 1/16"	75	4000	98	EZ-THP-375	THPL-N-375	80	2



To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	9 3/8"	21 1/4"	19 1/2"	8"	9"	7"	8"
2	9 3/8"	25 1/2"	24"	8"	9"	7"	8"
3	9 7/8"	25 1/2"	24"	8"	9"	7"	8"
4	12"	25 1/2"	24"	8"	9"	7"	8"
5	10"	25 1/2"	24"	8"	9"	7"	8"
6	9 7/8"	21 7/8"	20 3/8"	8"	9"	7"	8"
7	12 1/2"	25 1/2"	24"	8"	9"	7"	8"

Overall Dimensions Base Mounting Pattern

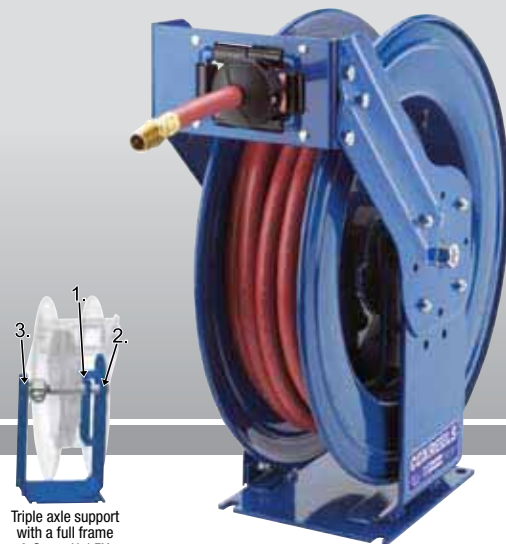

Triple axle support with a full frame & Super Hub™

## T SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Electroless nickel plated steel swivel on 1" models

### DESIGN & STRUCTURE

- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system
- Built for rugged mobile applications
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Stainless Steel rollers on 3/4" & 1" models
- Solid one piece, heavy gauge 1/4" steel base & support posts for maximum strength
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Controlled retraction speed up to 80% slower on EZ-COIL models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Fuel Delivery
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants
- Lube Skids & Trucks
- Service / Mechanic / Utility Vehicles
- Mining, Construction & Railroad Operations
- Automotive, Fleet & Aircraft Maintenance

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories



# C SERIES AIR/WATER - DUAL PURPOSE HOSE REELS



## C SERIES :: REEL SPECIFICATIONS

### SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets (Zinc plated steel swivels on HP models)

Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Compact two reel assembly for dual hose applications, each reel operates independently
- Guide arm adjusts to wall, floor & overhead positions
- Single expanded, 1/4" steel mounting base for increased stability & space efficiency
- One mounting pattern allow 1/2 the installation time required to install 2 reels at one station
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive & Fleet Service Centers

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

**COXREELS® C Series "Combination" spring driven hose reels are a combination of two hose reels in one compact assembly.** They are perfect for applications in which two sources are needed to get the job done when space is a critical factor. The single mounting base creates stability and adds to the convenience of one mounting pattern. This series is also available in air hose/electrical cord combinations.

### LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>C-LP-125-125</b>	1/4"	1/2"	25	300	66	<b>C-LPL-125-125</b>	60	<b>1</b>
<b>C-LP-135-135</b>	1/4"	1/2"	35	300	67	<b>C-LPL-135-135</b>	60	<b>1</b>
<b>C-LP-150-150</b>	1/4"	1/2"	50	300	74	<b>C-LPL-150-150</b>	64	<b>1</b>
<b>C-LP-325-325</b>	3/8"	5/8"	25	300	67	<b>C-LPL-325-325</b>	60	<b>2</b>
<b>C-LP-335-335</b>	3/8"	5/8"	35	300	69	<b>C-LPL-335-335</b>	60	<b>2</b>
<b>C-LP-350-350</b>	3/8"	5/8"	50	300	78	<b>C-LPL-350-350</b>	64	<b>2</b>
<b>C-LP-425-425</b>	1/2"	3/4"	25	300	70	<b>C-LPL-425-425</b>	60	<b>3</b>

### MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>C-MP-325-325</b>	3/8"	1 1/16"	25	3000	80	<b>C-MPL-325-325</b>	66	<b>2</b>
<b>C-MP-335-335</b>	3/8"	1 1/16"	35	3000	86	<b>C-MPL-335-335</b>	68	<b>2</b>
<b>C-MP-425-425</b>	1/2"	1 3/16"	25	2500	78	<b>C-MPL-425-425</b>	64	<b>3</b>
<b>C-MP-430-430</b>	1/2"	1 3/16"	30	2500	84	<b>C-MPL-430-430</b>	66	<b>3</b>

### HIGH PRESSURE

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**


HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>C-HP-125-125</b>	1/4"	9/16"	25	5000	78	<b>C-HPL-125-125</b>	66	<b>3</b>
<b>C-HP-135-135</b>	1/4"	9/16"	35	5000	84	<b>C-HPL-135-135</b>	68	<b>3</b>
<b>C-HP-325-325</b>	3/8"	1 1/16"	25	4000	78	<b>C-HPL-325-325</b>	64	<b>3</b>
<b>C-HP-330-330</b>	3/8"	1 1/16"	30	4000	82	<b>C-HPL-330-330</b>	66	<b>3</b>

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	10 1/2"	18 5/8"	17"	8"	9"	7"	8"
<b>2</b>	11 1/2"	18 5/8"	17"	8"	9"	7"	8"
<b>3</b>	11 1/2"	18 5/8"	17"	8"	9"	7"	8"

Overall Dimensions Base Mounting Pattern

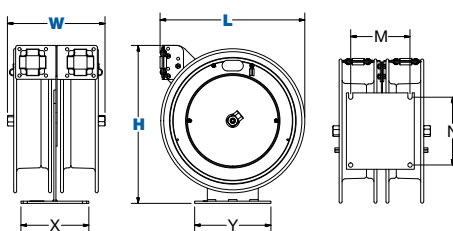

# DUAL PURPOSE HOSE REELS - AIR/ELECTRIC **C SERIES**

**COXREELS® C Series** "Combination" spring driven air hose/electric cord reels are two reels in one compact assembly. They are perfect for applications that require pneumatic air and an electrical power feed. The single expanded mounting base creates stability and adds to the convenience of one mounting pattern. This series is also available in dual hose combinations.

## FOR INDOOR USE ONLY

Coxreels electric and pneumatic hose reels operate as two independent, self-retracting 50 foot trouble-free assemblies. All models rated: 115 volts, 3" conductors, 60 hz single phase.

HOSE & CORD											SIZE INDEX
MODEL	ACCESSORY	AWG / NO COND.	CORD FT.	TYPE	AMPS.	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>C-L350-5016-A</b>	Single Industrial Receptacle†	16 / 3	50	SJO	13	3/8"	5/8"	50	300	94	<b>1</b>
<b>C-L350-5012-A</b>		12 / 3	50	SJO	20	3/8"	5/8"	50	300	96	<b>1</b>
<b>C-L350-5012-B</b>	Quad "4 Plug" Industrial Receptacle†	12 / 3	50	SJO	20	3/8"	5/8"	50	300	97	<b>1</b>
<b>C-L350-5016-C</b>	Fluorescent Tube Light - Shock Absorbing & Shatter Resistant†	16 / 3	50	SJTO	.3	3/8"	5/8"	50	300	94	<b>1</b>
<b>C-L350-5016-D</b>	Fluorescent Angle Light with Tool Tap Plug†	16 / 3	50	SJTO	13	3/8"	5/8"	50	300	94	<b>1</b>
<b>C-L350-5016-D2</b>	Dual Fluorescent Angle Light with Tool Tap Plug†	16 / 3	50	SJTO	12	3/8"	5/8"	50	300	94	<b>1</b>
<b>C-L350-5016-E</b>	Incandescent Caged Drop Light with Tool Tap Plug†	16 / 3	50	SJTO	13	3/8"	5/8"	50	300	94	<b>1</b>
<b>C-L350-5016-F</b>	Duplex G.F.C.I. Metal Industrial Receptacle†	16 / 3	50	SJO	13	3/8"	5/8"	50	300	94	<b>1</b>
<b>C-L350-5012-F</b>		12 / 3	50	SJO	20	3/8"	5/8"	50	300	96	<b>1</b>
<b>C-L350-5016-X</b>	With Hose, With Cord, Less Accessory	16 / 3	50	SJO	13	3/8"	5/8"	50	300	93	<b>1</b>
<b>C-L350-5012-X</b>		12 / 3	50	SJO	20	3/8"	5/8"	50	300	95	<b>1</b>
<b>C-L350L-5016L-X</b>	Less Hose, Less Cord, Less Accessory	16 / 3	50	N/A	25	3/8"	5/8"	50	300	78	<b>1</b>
<b>C-L350L-5012L-X</b>		12 / 3	50	N/A	25	3/8"	5/8"	50	300	78	<b>1</b>

## REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	16"	18 5/8"	17"	8"	9"	7"	8"

Overall Dimensions

Base

Mounting Pattern

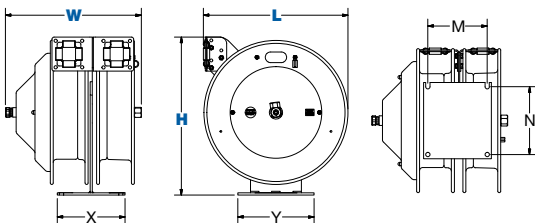

UL Listed† :: Accessories only

## C SERIES :: REEL SPECIFICATIONS

### SWIVEL & LEAD CABLE

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- External CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Include 5' lead cable & grounding plug (except on less cord models)

### DESIGN & STRUCTURE

- Compact two reel assembly for air/electric applications, each reel operates independently
- Guide arm adjusts to wall, floor & overhead positions
- Single expanded, 1/4" steel mounting base for increased stability & space efficiency
- One mounting pattern allow 1/2 the installation time required to install 2 reels at one station
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose/cord at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Air Services
- Pneumatic Tools
- Power Tools
- Light Source
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive & Fleet Service Centers

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories





# EN SERIES ENCLOSED HOSE REELS



## EN SERIES :: REEL SPECIFICATIONS

### SWIVEL

- Machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Sturdy enclosed reel for aesthetic purposes & greater hose protection
- Models with size index #2 feature Coxreels' exclusive Super Hub™ dual axle support system
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Heavy gauge steel 3-piece casing with adjustable hose roller guide

### RETRACTION

- Controlled retraction speed up to 80% slower on **EZ-COIL** models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Restaurants & Commercial Kitchens
- Pneumatic Tools
- Grocery Stores
- Lubrication
- Food & Chemical Plants
- Chemical Fluid Transfer
- General Industrial

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Hoses
- Mounting Brackets
- Assorted Reel Accessories

**COXREELS® EN Series "Enclosed" spring driven hose reels are protected by a powder coated steel casing that shields out the elements to protect and extend the life of the reel, the hose and the components inside.** It adds a neat, tidy, aesthetic appearance to work environments that demand a clean and professional look. The 3 piece casing is easy to assemble and disassemble for simple installation and maintenance.

### LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
**Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
EN-N-125	1/4"	1/2"	25	300	51	-	ENL-N-125	48	1
EN-N-135	1/4"	1/2"	35	300	51	-	ENL-N-135	48	1
EN-N-150	1/4"	1/2"	50	300	52	-	ENL-N-150	47	1
EN-N-160	1/4"	1/2"	60	300	65	-	ENL-N-160	60	2
EN-N-325	3/8"	5/8"	25	300	49	EZ-EN-325	ENL-N-325	46	1
EN-N-335	3/8"	5/8"	35	300	50	-	ENL-N-335	46	1
EN-N-350	3/8"	5/8"	50	300	65	EZ-EN-350	ENL-N-350	58	2
EN-N-360	3/8"	5/8"	60	300	68	-	ENL-N-360	61	2
EN-N-425	1/2"	3/4"	25	300	63	EZ-EN-425	ENL-N-425	58	1
EN-N-435	1/2"	3/4"	35	300	64	-	ENL-N-435	59	2
EN-N-450	1/2"	3/4"	50	300	69	EZ-EN-450	ENL-N-450	64	2

To order **EZ-Coil®** equipped models less hose, please add prefix "EZ-"

### MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
ENM-N-325	3/8"	11/16"	25	3000	61	EZ-ENM-325	ENML-N-325	54	1
ENM-N-335	3/8"	11/16"	35	3000	64	-	ENML-N-335	55	1
ENM-N-350	3/8"	11/16"	50	3000	80	EZ-ENM-350	ENML-N-350	68	2
ENM-N-425	1/2"	13/16"	25	2500	61	EZ-ENM-425	ENML-N-425	54	1
ENM-N-435	1/2"	13/16"	35	2500	76	-	ENML-N-435	66	2
ENM-N-450	1/2"	13/16"	50	2500	82	EZ-ENM-450	ENML-N-450	68	2

To order **EZ-Coil®** equipped models less hose, please add prefix "EZ-"

### HIGH PRESSURE

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
ENH-N-125	1/4"	9/16"	25	5000	60	EZ-ENH-125	ENHL-N-125	54	1
ENH-N-135	1/4"	9/16"	35	5000	63	-	ENHL-N-135	55	1
ENH-N-150	1/4"	9/16"	50	5000	79	EZ-ENH-150	ENHL-N-150	68	2
ENH-N-160	1/4"	9/16"	60	5000	85	-	ENHL-N-160	71	2
ENH-N-325	3/8"	11/16"	25	4000	61	-	ENHL-N-325	54	1
ENH-N-335	3/8"	11/16"	35	4000	76	-	ENHL-N-335	67	2
ENH-N-350	3/8"	11/16"	50	4000	80	EZ-ENH-350	ENHL-N-350	68	2

To order **EZ-Coil®** equipped models less hose, please add prefix "EZ-"

### REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	67 7/8"	18 7/8"	19"	6"	6"	4"	5"
2	8 1/2"	21 3/4"	21 7/8"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern

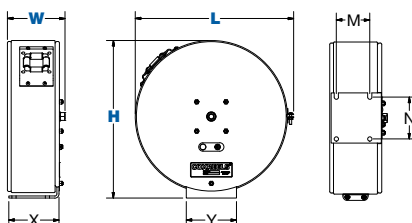

# EXPANDABLE METAL CABINETS **E SERIES**

**COXREELS® E Series** "Expandable" multiple bank system is the pinnacle in professional appearance and organization. The cabinets are interlocking and expandable to any number of spring driven reel assemblies required. Designed for easy installation, maintenance and servicing the E Series system is truly the professional's choice for multimedia delivery in one custom package.

## LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
**Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
<b>E-LP-330</b>	3/8"	5/8"	30	300	33	<b>EZ-E-LP-330</b>	<b>E-LPL-330</b>	29	<b>1</b>
<b>E-LP-350</b>	3/8"	5/8"	50	300	46	<b>EZ-E-LP-350</b>	<b>E-LPL-350</b>	40	<b>2</b>
<b>E-LP-430</b>	1/2"	3/4"	30	300	41	<b>EZ-E-LP-430</b>	<b>E-LPL-430</b>	36	<b>1</b>
<b>E-LP-450</b>	1/2"	3/4"	50	300	50	<b>EZ-E-LP-450</b>	<b>E-LPL-450</b>	42	<b>2</b>

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

## MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
<b>E-MP-330</b>	3/8"	5/8"	30	3000	47	<b>EZ-E-MP-330</b>	<b>E-MPL-330</b>	39	<b>1</b>
<b>E-MP-350</b>	3/8"	5/8"	50	3000	61	<b>EZ-E-MP-350</b>	<b>E-MPL-350</b>	49	<b>2</b>
<b>E-MP-430</b>	1/2"	3/4"	30	2500	47	<b>EZ-E-MP-430</b>	<b>E-MPL-430</b>	39	<b>1</b>
<b>E-MP-450</b>	1/2"	3/4"	50	2500	63	<b>EZ-E-MP-450</b>	<b>E-MPL-450</b>	49	<b>2</b>

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

## HIGH PRESSURE

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
<b>E-HP-130</b>	1/4"	9/16"	30	5000	46	<b>EZ-E-HP-130</b>	<b>E-HPL-130</b>	39	<b>3</b>
<b>E-HP-150</b>	1/4"	9/16"	50	5000	60	<b>EZ-E-HP-150</b>	<b>E-HPL-150</b>	49	<b>4</b>
<b>E-HP-330</b>	3/8"	11/16"	30	4000	47	<b>EZ-E-HP-330</b>	<b>E-HPL-330</b>	39	<b>3</b>
<b>E-HP-350</b>	3/8"	11/16"	50	4000	61	<b>EZ-E-HP-350</b>	<b>E-HPL-350</b>	49	<b>4</b>

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

## REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	6 1/8"	18 1/4"	17 1/4"	6"	6"	4"	5"
<b>2</b>	8 3/4"	21"	19 5/8"	6"	6"	4"	5"
<b>3</b>	7"	18 1/4"	17 1/4"	6"	6"	4"	5"
<b>4</b>	9 1/4"	21"	19 5/8"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern



Cabinet illustration (above) shows three reels, three metal cabinets, & one set of end panels

## E SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Designed for expandable metal cabinets & multiple reel bank systems
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Controlled retraction speed up to 80% slower on **EZ-COIL** models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Washdown
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Cabinet Mount
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Automotive Dealerships
- Quick Lube Service Centers

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Cabinet
- Hoses
- Assorted Reel Accessories

## COXREELS® ACCESSORY

### Cabinet

Length: 24 1/2" Width: 11 1/8" Height: 22 1/4"

- Unlimited expandability
- Easy to install
- Cabinet constructed of 14 gauge steel with 4-roller non-sag hose guide system for reduced hose wear
- All steel access panel
- Mounting bracket is 3/16" bent steel, fits 3" to 8 1/2" flange on "I" or "H" beam
- Easy access for connection of air, water, oil & grease

**METAL CABINET: #1796-2**

Includes cabinet, access panel & mounting bracket. Weight: 45 lbs.

**END PANELS: #1798-1**

Includes a set of two, all steel construction. Finished & caps the ends of each bank. Weight: 8 lbs.



# S & SW SERIES SIDE MOUNT HOSE REELS FOR CABINET MOUNT



EZ-S Series

SW Series

Reel Orientation:  
Right Mount is shown with  
mounting base on the right  
side & hose payout from  
the top of the reel

## S SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel (On SW Models)
- Swivel Seals: VITON®

### DESIGN & STRUCTURE

- Side mount design for vertical flat surface, cabinet or enclosed space mounts
- 2-bolt mounting pattern easily mounts & detaches for temporary or permanent installation
- Solid one piece, heavy gauge 1/4" steel arm base for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Hose control bar prevents hose from slipping off the discs

### RETRACTION

- Controlled retraction speed up to 80% slower on **EZ-COIL** models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length.
- Non-locking, less ratchet option available (add suffix **-BXC**)

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Lubrication
- Chemical Fluid Transfer
- Welding Shops
- General Industrial
- Cabinet Mount
- Service / Mechanic / Utility Vehicles
- Construction Sites

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Hoses
- Assorted Reel Accessories

**COXREELS® S Series "Side Mount" spring driven hose reels for cabinet mount are compact, versatile and unique in the way they mount and operate.** They feature a simple two-bolt mounting pattern for easy installation and detachment for multiple workstation applications. S Series is available for air/water, oil, grease, oxy-acetylene and T Grade gas welding hose. The 360° hose direction allows the user to operate the reel in any direction the job demands. Common applications include service units, tool benches, tool boxes, vertical walls and beams, vehicle lift systems, machine tools, service vehicles or any flat vertical surface.

\*The tables below only shows "Mount Right" models. To order "Mount Left" models replace "R" with "L". EXAMPLE: Change the **SR13-L125** ▶ **SL13-L125**

### S SERIES LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	MOUNT	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>SR13-L125</b>	Right	1/4"	1/2"	25	300	18	<b>EZ-SR13-L125</b>	14	<b>1</b>
<b>SR15-L135</b>	Right	1/4"	1/2"	35	300	23	<b>EZ-SR15-L135</b>	17	<b>2</b>
<b>SR15-L325</b>	Right	3/8"	5/8"	25	300	23	<b>EZ-SR15-L325</b>	17	<b>2</b>
<b>SR17-L350</b>	Right	3/8"	5/8"	50	300	32	<b>EZ-SR17-L350</b>	25	<b>3</b>
<b>SR17-L430</b>	Right	1/2"	3/4"	30	300	34	<b>EZ-SR17-L430</b>	29	<b>3</b>
<b>SR19-L450</b>	Right	1/2"	3/4"	50	300	37	<b>EZ-SR19-L450</b>	29	<b>5</b>

To order **EZ-Coil®** equipped models less hose, please add prefix "**EZ-**"

### S SERIES MEDIUM PRESSURE REELS

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 250° F. Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	MOUNT	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>SR17-M325</b>	Right	3/8"	5/8"	25	3000	41	<b>SR17L-M325</b>	32	<b>4</b>
<b>SR19-M350</b>	Right	3/8"	5/8"	50	3000	48	<b>SR19L-M350</b>	36	<b>5</b>
<b>SR17-M425</b>	Right	1/2"	3/4"	25	2500	38	<b>SR17L-M425</b>	31	<b>4</b>
<b>SR19-M450</b>	Right	1/2"	3/4"	50	2500	50	<b>SR19L-M450</b>	36	<b>6</b>

### S SERIES HIGH PRESSURE REELS :: HP

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. Note: Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	MOUNT	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>SR17-H125</b>	Right	1/4"	1/2"	25	5000	37	<b>SR17L-H125</b>	31	<b>4</b>
<b>SR19-H150</b>	Right	1/4"	1/2"	50	5000	47	<b>SR19L-H150</b>	36	<b>6</b>
<b>SR17-H325</b>	Right	3/8"	5/8"	25	4000	38	<b>SR17L-H325</b>	31	<b>4</b>
<b>SR19-H350</b>	Right	3/8"	5/8"	50	4000	48	<b>SR19L-H350</b>	36	<b>7</b>

### SW SERIES WELDING HOSE REELS :: SW

Hose supplied on reel Oxy-Acetylene or T-Grade. Oxy-Acetylene is twin-siamese type meeting R.M.A. and C.G.A. type V.D. grade R specifications. Use of other types of hose is not recommended. Reels with "T Grade" hoses are used for a wide variety of gases, such as MAPP, propane, natural and fuel. Note: Do Not Exceed Listed Hose O.D. To Obtain Max. Length.

HOSE							LESS HOSE		SIZE INDEX
MODEL	MOUNT	GAS	I.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>SR17W-150</b>	Right	Oxy/Act	1/4"	50	200	38	<b>SR17WL-150</b>	26	<b>8</b>
<b>SR19W-175</b>	Right	Oxy/Act	1/4"	75	200	53	<b>SR19WL-175</b>	36	<b>9</b>
<b>SR17WT-150</b>	Right	T Grade	1/4"	50	200	38	<b>SR17WTL-150</b>	26	<b>8</b>
<b>SR19WT-175</b>	Right	T Grade	1/4"	75	200	53	<b>SR19WTL-175</b>	36	<b>9</b>


Less hose SW Series models comes with inlet hose

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	Y	M
<b>1</b>	6"	14 1/4"	13"	9 1/4"	2 1/2"
<b>2</b>	6"	16 1/2"	15 1/4"	10 1/4"	2 1/2"
<b>3</b>	5 3/4"	18 1/4"	17"	13"	2 1/2"
<b>4</b>	6 5/8"	18 1/4"	17"	13"	2 1/2"
<b>5</b>	7 1/2"	20 3/4"	19 1/2"	14 1/4"	2 1/2"
<b>6</b>	8"	20 3/4"	19 1/2"	14 1/4"	2 1/2"
<b>7</b>	8 1/2"	20 3/4"	19 1/2"	14 1/4"	2 1/2"
<b>8</b>	7 7/8"	18 1/4"	17"	13"	2 1/2"
<b>9</b>	9 1/2"	20 7/8"	19 1/2"	14 1/4"	2 1/2"

Overall Dimensions Base Mounting Pattern





**COXREELS® SG & SGW Series** expand the capabilities of the “Side Mount” spring driven hose reels, adding a multi-position guide arm for maximum and convenient hose control. Ideal for tight spaces, the versatile SG Series (for air/water, oil and grease) and SGW Series (for oxy-acetylene and T Grade gas welding hose) feature a simple two-bolt mounting pattern for easy installation and detachment on any vertical flat surface. Common applications include service vehicles, tool benches, vertical walls and beams, vehicle lift systems, machine tools and more. The guide arm and roller assembly are easily moved to one of the six different positions with a standard ½” wrench.

### SG SERIES LOW PRESSURE

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
SG13-L125	1/4"	1/2"	25'	300	25	EZ-SG13-L125	SG13L-L125	22	1
SG13-L135	1/4"	1/2"	35'	300	26	EZ-SG13-L135	SG13L-L135	23	1
SG13-L325	3/8"	5/8"	25'	300	26	EZ-SG13-L325	SG13L-L325	23	2
SG17-L350	3/8"	5/8"	50'	300	40	EZ-SG17-L350	SG17L-L350	33	3
SG17-L430	1/2"	3/4"	30'	300	42	EZ-SG17-L430	SG17L-L430	37	3
SG19-L450	1/2"	3/4"	50'	300	52	EZ-SG19-L450	SG19L-L450	44	5

To order EZ-Coil® equipped models less hose, please add prefix “EZ-”

### SG SERIES MEDIUM PRESSURE

Reels are furnished with standard one wire braid hose suitable for air, water or oil applications. Hose exceeds SAE R1 specifications. Maximum temperature 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
SG17-M325	3/8"	1 1/16"	25'	3000	46	EZ-SG17-M325	SG17L-M325	39	3
SG19-M350	3/8"	1 1/16"	50'	3000	63	EZ-SG19-M350	SG19L-M350	51	5
SG17-M425	1/2"	1 3/16"	25'	2500	46	EZ-SG17-M425	SG17L-M425	39	4
SG19-M450	1/2"	1 3/16"	50'	2500	65	EZ-SG19-M450	SG19L-M450	51	6

To order EZ-Coil® equipped models less hose, please add prefix “EZ-”

### SG SERIES HIGH PRESSURE :: HP

Reels are furnished standard with S.A.E. 100R16 #1 or #2 wire braid hose suitable for grease and hydraulic oil applications. Maximum temp. 250° F. **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
SG17-H125	1/4"	9/16"	25'	5000	45	EZ-SG17-H125	SG17L-H125	39	4
SG19-H150	1/4"	9/16"	50'	5000	62	EZ-SG19-H150	SG19L-H150	51	7
SG17-H325	3/8"	1 1/16"	25'	4000	46	EZ-SG17-H325	SG17L-H325	39	4
SG19-H350	3/8"	1 1/16"	50'	4000	63	EZ-SG19-H350	SG19L-H350	51	8

To order EZ-Coil® equipped models less hose, please add prefix “EZ-”

### SGW SERIES WELDING HOSE REELS :: SGW

Hose supplied on reel Oxy-Acetylene or T-Grade. Oxy-Acetylene is twin-siemese type meeting R.M.A. and C.G.A. type V.D. grade R specifications. Use of other types of hose is not recommended. Reels with “T Grade” hoses are used for a wide variety of gases, such as MAPP, propane, natural and fuel. **Note: Do Not Exceed Listed Hose O.D. To Obtain Max. Length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	GAS	I.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
SG17W-150	Oxy/Act	1/4"	50'	200	59	EZ-SG17W-150	SG17WL-150	47	9
SG19W-175	Oxy/Act	1/4"	75'	200	77	EZ-SG19W-175	SG19WL-175	60	10
SG17WT-150	T Grade	1/4"	50'	200	59	EZ-SG17WT-150	SG17WTL-150	47	9
SG19WT-175	T Grade	1/4"	75'	200	77	EZ-SG19WT-175	SG19WTL-175	60	10



To order EZ-Coil® equipped models less hose, please add prefix “EZ-”. Less hose SGW Series models comes with inlet hose

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	Y	M
1	6 1/4"	15 1/2"	13 1/2"	14"	2 1/2"
2	6 3/4"	15 1/2"	13 1/2"	14"	2 1/2"
3	6 3/4"	19 1/2"	17"	18"	2 1/2"
4	7 1/4"	19 1/2"	17"	18"	2 1/2"
5	8 1/2"	22"	19 1/2"	20 1/2"	2 7/8"
6	9 3/8"	22"	19 1/2"	20 1/2"	2 7/8"
7	9"	22"	19 1/2"	20 1/2"	2 7/8"
8	9 1/2"	22"	19 1/2"	20 1/2"	2 7/8"
9	8 7/8"	19 1/2"	17"	18"	2 1/2"
10	10 1/2"	22"	19 1/2"	20 1/2"	2 1/2"

Overall Dimensions Base Mounting Pattern

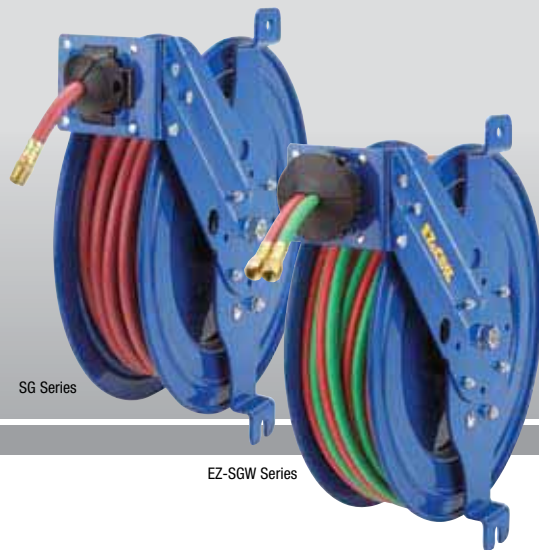

### SG SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel (On SGW Models)
- Swivel Seals: VITON® (On SGW Models)

#### DESIGN & STRUCTURE

- Side mount design for vertical flat surface, cabinet or enclosed space mounts
- Adjustable 6 position guide arm & roller assembly provide maximum hose control
- 2-bolt mounting pattern easily mounts & detaches for temporary or permanent installation
- Solid one piece, 3/16" steel arm base for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

#### RETRACTION

- Controlled retraction speed up to 80% slower on EZ-COIL models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures hose at desired length.
- Non-locking, less ratchet option available (add suffix -BXC)

#### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

#### POSSIBLE FIELDS OF APPLICATION

- Air/Water Services
- Pneumatic Tools
- Welding Shops
- Service / Mechanic / Utility Vehicles
- Lubrication
- Chemical Fluid Transfer
- General Industrial
- Construction Sites

#### ACCESSORIZE YOUR REEL :: Pg 50

- O-Rings & Swivels
- Hoses
- Assorted Reel Accessories



# SP SERIES HIGH CAPACITY HOSE REELS



## SP SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE (AFSL on 1" models)
- Electroless nickel plated steel swivel on 1" models
- Straight in-line aluminum swivel on 1 1/2" models

### DESIGN & STRUCTURE

- Reel features a sturdy box-style frame design
- Reel adjusts to wall, floor, vehicle & overhead positions
- Heavy gauge 1/4" steel base for maximum strength
- Reinforced steel frame provides maximum strength & stability
- Long lasting self-lubricated flange bearings for smooth rotation
- Heavy duty 1" stainless steel pinch-proof rollers

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel pawl spring
- Cast iron lock ring with non-sparking bronze pawl
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- General Industrial
- Bulk Handling
- Washdown
- Lubrication
- Fuel Delivery
- Chemical Fluid Transfer
- Lube Skids & Trucks
- Service / Mechanic / Utility Vehicles
- Mining, Construction & Railroad Operations
- Aircraft & Fleet Maintenance
- Marine, Offshore & Ship Building

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Assorted Reel Accessories

**COXREELS® SP Series "Single Product Delivery" spring driven hose reels are built to handle large hose diameters.** Used in applications demanding large volume delivery in low and medium pressures such as fuel and water. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

### LOW PRESSURE

Dual braid hose for applications 250 to 300 psi and temperatures to 150° F. Reel less hose 250° F. For higher temperatures and pressures, see price sheet or consult factory. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	
<b>SLP-4100</b>	1/2"	3/4"	100	300	1/2"	111	<b>SLPL-4100</b>	96	<b>1</b>
<b>SLP-550</b>	3/4"	1 1/16"	50	300	3/4"	99	<b>SLPL-550</b>	86	<b>2</b>
<b>SLP-575</b>	3/4"	1 1/16"	75	300	3/4"	136	<b>SLPL-575</b>	117	<b>3</b>
<b>SLP-5100</b>	3/4"	1 1/16"	100	300	3/4"	151	<b>SLPL-5100</b>	126	<b>3</b>
<b>SLP-625</b>	1"	1 1/2"	25	300	1"	106	<b>SLPL-625</b>	90	<b>4</b>
<b>SLP-650</b>	1"	1 1/2"	50	300	1"	139	<b>SLPL-650</b>	109	<b>5</b>
<b>SLP-675</b>	1"	1 1/2"	75	300	1"	193	<b>SLPL-675</b>	148	<b>6</b>
Please consult factory for reels with hose	1 1/4"	1 3/16"	25	250	1 1/2"***	-	<b>SLPL-725</b>	110	<b>7</b>
	1 1/4"	1 3/16"	50	250	1 1/2"***	-	<b>SLPL-750</b>	123	<b>8</b>
	1 1/2"	2 1/16"	25	250	1 1/2"	-	<b>SLPL-825</b>	107	<b>7</b>
	1 1/2"	2 1/16"	35	250	1 1/2"	-	<b>SLPL-835</b>	128	<b>8</b>
	1 1/2"	2 1/16"	50	250	1 1/2"	-	<b>SLPL-850</b>	138	<b>9</b>

\*\* Reducer #1578 is required for 1-1/4" hose. Not supplied with reel, see page 52

### MEDIUM PRESSURE

Steel reinforced 100 RI hose for applications 1500 to 2500 psi and temperatures to 250° F. For higher temperatures and pressures, see price sheet or consult factory. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	
<b>SMP-4100</b>	1/2"	1 3/16"	100	2500	1/2"	139	<b>SMPL-4100</b>	113	<b>1</b>
<b>SMP-550</b>	3/4"	1 1/16"	50	1500	3/4"	109	<b>SMPL-550</b>	89	<b>5</b>
<b>SMP-575</b>	3/4"	1 1/16"	75	1500	3/4"	151	<b>SMPL-575</b>	121	<b>6</b>
<b>SMP-5100</b>	3/4"	1 1/16"	100	1500	3/4"	165	<b>SMPL-5100</b>	126	<b>6</b>
Please consult factory for reels with hose	1"	1 3/8"	25	2000	1"	-	<b>SMPL-625</b>	92	<b>5</b>
	1"	1 3/8"	50	2000	1"	-	<b>SMPL-650</b>	110	<b>6</b>
	1"	1 3/8"	75	2000	1"	-	<b>SMPL-675</b>	135	<b>9</b>

### REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
<b>1</b>	18 1/2"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
<b>2</b>	19 5/8"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
<b>3</b>	19 5/8"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
<b>4</b>	19 5/8"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
<b>5</b>	19 5/8"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
<b>6</b>	21"	28 1/2"	30 3/8"	15 3/8"	29"	10 1/2"	7 1/2"
<b>7</b>	17 1/2"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
<b>8</b>	18"	28 1/2"	30 3/8"	15 3/8"	29"	10 1/2"	7 1/2"
<b>9</b>	20"	28 1/2"	30 3/8"	17 3/8"	29"	10 1/2"	9 1/2"

Overall Dimensions

Base

Drum

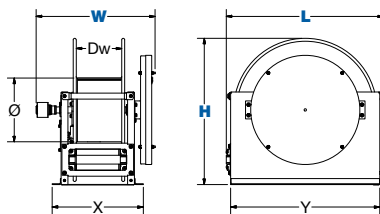

# DUAL HIGH CAPACITY HOSE REELS **DP SERIES**

**COXREELS® DP Series “Dual Product Delivery”** spring driven hose reels have two swivel inlets and two outlets for dual hose applications. Like the SP Series they are built to handle large hose diameters used in applications demanding large volume delivery in low and medium pressures. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

## LOW PRESSURE

Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 300 psi and temperatures to 250° F. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	
Please consult factory for reels with hose	3/8"	3/4"	50	300	1/2"	-	<b>DLPL-350</b>	94	<b>1</b>
	3/8"	3/4"	75	300	1/2"	-	<b>DLPL-375</b>	115	<b>1</b>
	3/8"	3/4"	100	300	1/2"	-	<b>DLPL-3100</b>	117	<b>2</b>
	1/2"	7/8"	50	300	1/2"	-	<b>DLPL-450</b>	97	<b>1</b>
	1/2"	7/8"	75	300	1/2"	-	<b>DLPL-475</b>	104	<b>2</b>
	1/2"	7/8"	100	300	1/2"	-	<b>DLPL-4100</b>	138	<b>3</b>
	3/4"	1 1/4"	25	300	3/4"	-	<b>DLPL-525</b>	93	<b>4</b>
	3/4"	1 1/4"	50	300	3/4"	-	<b>DLPL-550</b>	100	<b>5</b>

## MEDIUM PRESSURE

Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 3000 psi and temperatures to 250° F. For higher temperatures and pressures, see price sheet or consult factory. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	
Please consult factory for reels with hose	3/8"	13/16"	50	3000	1/2"	-	<b>DMPL-350</b>	99	<b>1</b>
	3/8"	13/16"	75	3000	1/2"	-	<b>DMPL-375</b>	128	<b>1</b>
	3/8"	13/16"	100	3000	1/2"	-	<b>DMPL-3100</b>	120	<b>2</b>
	1/2"	15/16"	50	3000	1/2"	-	<b>DMPL-450</b>	102	<b>1</b>
	1/2"	15/16"	75	3000	1/2"	-	<b>DMPL-475</b>	115	<b>2</b>
	1/2"	15/16"	100	3000	1/2"	-	<b>DMPL-4100</b>	138	<b>3</b>

## REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
<b>1</b>	21 1/2"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
<b>2</b>	21 1/2"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
<b>3</b>	21 1/2"	28 1/2"	30 3/8"	15 3/8"	29"	10 1/2"	7 1/2"
<b>4</b>	23 7/8"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
<b>5</b>	23 7/8"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"

Overall Dimensions

Base

Drum

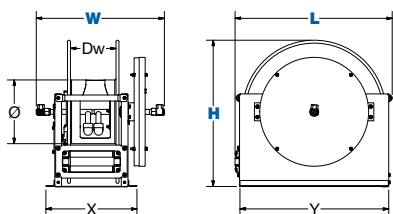


## COXREELS® ACCESSORY



### Top Rewind 4-Way Roller Bracket for SP & DP Series FOR CEILING, WALL OR FLOOR MOUNT APPLICATIONS

4-way enclosed pinch-proof stainless steel rollers are 1" in diameter supported by powder coated steel brackets. Specify ceiling mount & specify drum width. Weight: 10 lbs.

For 3/8" - 3/4" - **20458 & 8100** For 1" - 1 1/2" - **20458 & 8101**

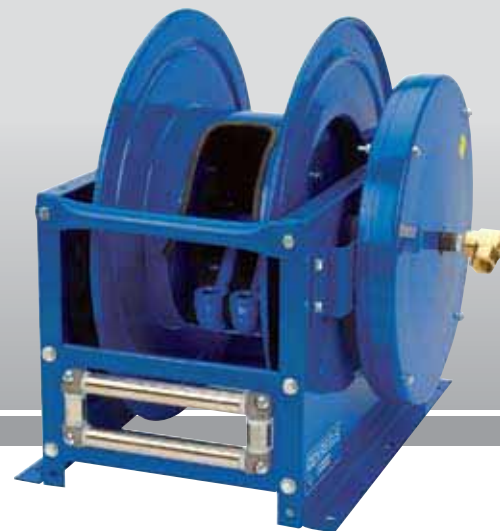

## DP SERIES :: REEL SPECIFICATIONS

### SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Sturdy box-style frame design with two inlets & two outlets to handle dual hose applications
- Low profile outlet riser & open drum slot design for even hose wrap
- Reel adjusts to wall, floor, vehicle & overhead positions with optional roller bracket
- Heavy gauge 1/4" steel base for maximum strength
- Reinforced steel frame provides maximum strength & stability
- Long lasting self-lubricated flange bearings for smooth rotation
- Heavy duty 1" stainless steel pinch-proof rollers

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel pawl spring
- Cast iron lock ring with non-sparking bronze pawl
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Hydraulics
- Hydrant Dispenser
- Twin Agent Applications
- Chemical Fluid Transfer

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

# 300 SERIES EXHAUST REELS



**COXREELS® 300 Series “Exhaust” spring driven reels are there to provide ventilation where necessary.** This heavy duty frame was built to provide strength, stability and durability. The 300 Series reels have features found on many of our reels like spun discs, welded steel frame and enclose cartridge motor. These reels also feature an easy access panel to have access to the main drum with internal ducting included, making it ready to go.

## EXHAUST REELS

LESS HOSE				SIZE INDEX
MODEL	I.D.	O.D.	FT.	
319-424	4"	24' Capacity	103	1
328-440	4"	40' Capacity	115	2
319-520	5"	20' Capacity	103	1
328-532	5"	32' Capacity	115	2
332-536	5"	36' Capacity	121	3
319-620	6"	20' Capacity	105	1
328-632	6"	32' Capacity	117	2
332-636	6"	36' Capacity	123	3

## 300 SERIES :: REEL SPECIFICATIONS

### DESIGN

- Exhaust hose reel designed to enable the extraction of exhaust fumes directly from the source of their emission & maintain safer shop air quality.
- 6" exhaust ductwork on all models
- For floor, wall & overhead mounting applications
- Easy access panel to the drum for convenient routine maintenance
- Hose guide rail
- Internal ducting is included

### STRUCTURE

- Reel features an all welded steel frame, no bolts, for strength & durability
- Drum mounted hose guide

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Cast iron lock ring with non-sparking bronze pawl
- Multi-position lock ratchet mechanism secures hose at desired length.

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide


### POSSIBLE FIELDS OF APPLICATION

- Indoor Vehicle Exhaust Removal System
- Vehicle Manufacturing Facilities
- Automotive Dealerships
- Automotive & Fleet Service Centers
- Garage Settings
- Fire Stations

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
1	28 1/4"	29 1/2"	24"	23 1/4"	14"	18"	19"
2	37 1/4"	29 1/2"	24"	32 1/4"	14"	18"	28"
3	41 1/4"	29 1/2"	24"	36 1/4"	14"	18"	32"

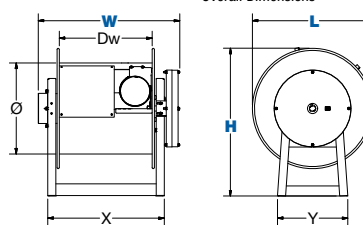

## COXREELS® 300 FEATURES

### Easy Access Panel


- An easy to remove panel allows full access to the drum

### All Welded Steel Frame

- An all welded steel frame for strength, durability, stability & to prevent tip-overs

### PERFECT FOR:

**Repair Centers  
Fire Stations  
Service Station  
Smog Stations  
Emergency Crews**

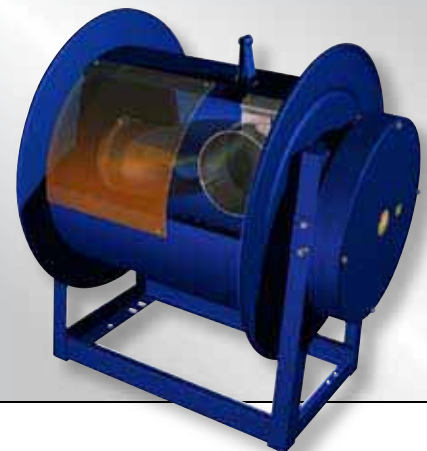

**COXREELS® V Series** spring driven and hand crank vacuum hose reels are available in both vacuum only and vacuum/pneumatic combinations. Both are designed to extract unwanted fumes, particles and by-products from your work area. The vacuum/pneumatic models have dual plumbing for vacuum extraction while simultaneously powering pneumatic tools such as grinders and sanders in an enclosed efficient system.

## V100 SERIES MODELS

LESS HOSE								SIZE INDEX
MODEL	DESCRIPTION	VACUUM			AIR		APRX. LBS.	
		INLET	CAP.	VAC.	INLET	CAP.		
V-117-850	Vacuum Only, Direct Crank	1½" Cuff	50	29" Hg	-	-	28	1

## V1175 SERIES MODELS

LESS HOSE								SIZE INDEX
MODEL	DESCRIPTION	VACUUM			AIR		APRX. LBS.	
		INLET	CAP.	VAC.	INLET	CAP.		
V-1175-850	Vacuum Only, Direct Crank	1½" NPT	50	29" Hg	-	-	118	2
V-1175-850-C	Vacuum Only, Bevel Front Crank	1½" NPT	50	29" Hg	-	-	121	3
V-1175-850-T	Vacuum Only, Bevel Top Crank	1½" NPT	50	29" Hg	-	-	121	3
VA-1175-850*	Vacuum & Air, Rim Rewind	1½" NPT	50	29" Hg	½" NPT	50	123	4
VA-1175-850-C*	Vacuum & Air, Bevel Front Crank	1½" NPT	50	29" Hg	½" NPT	50	126	4
VA-1175-850-T*	Vacuum & Air, Bevel Top Crank	1½" NPT	50	29" Hg	½" NPT	50	126	4

\*VA models have dual plumbing for both vacuum & air applications, pneumatic swivel inlet is solid brass ½" NPT 300 PSI swivel

## V SERIES MODELS

LESS HOSE								SIZE INDEX
MODEL	DESCRIPTION	VACUUM			AIR		APRX. LBS.	
		INLET	CAP.	VAC.	INLET	CAP.		
V-SLPL-825	Vacuum Only, Spring Rewind	1½" NPT	25	29" Hg	-	-	102	5
VA-DLPL-825*	Vacuum & Air, Spring Rewind	1½" NPT	25	29" Hg	½" NPT	25	107	6

\*VA models have dual plumbing for both vacuum & air applications, pneumatic swivel inlet is solid brass ½" NPT 300 PSI swivel

## REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
<b>1</b>	23⅝"	18"	17"	15"	6"	13½"	6¾"
<b>2</b>	24⅞"	26⅞"	24"	17⅞"	20¼"	10½"	11⅝"
<b>3</b>	22"	26⅞"	24"	17⅞"	20¼"	10½"	11⅝"
<b>4</b>	21¾"	26⅞"	24"	17⅞"	20¼"	10½"	11⅝"
<b>5</b>	17½"	24½"	26⅜"	15⅜"	25"	10½"	7½"
<b>6</b>	20⅞"	24½"	26⅜"	15⅜"	25"	10½"	7½"

Overall Dimensions

Base

Drum

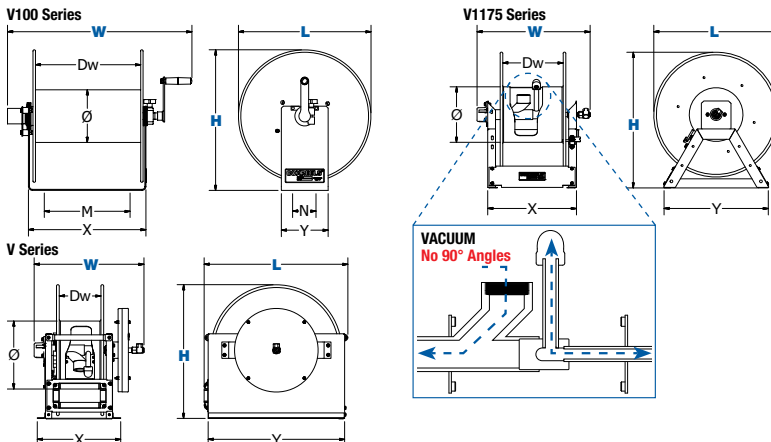

## V SERIES :: REEL SPECIFICATIONS

### V100 SERIES

- Direct hand crank reel with a solid one piece steel "U" shaped frame design
- Lightweight & compact design makes this reel the ideal solution for commercial vacuum systems
- Direct connect port for vacuum hose with bullet cuffs
- Adjustable tension brake to prevent "free-wheeling" during operation, transport or storage

### V1175 SERIES

- Sturdy all welded "A" frame base with a double supported steel axle
- Bevel gear hand crank
- Removable crank handle for compact storage
- Low profile outlet riser & open drum slot design, provide a non-crimping, flat smooth hose wrap

### V SERIES

- Enclosed factory tuned & matched cartridge-style spring motor
- Sturdy box-style frame with heavy duty steel cross supports to all four corners for extra rigidity
- Low profile outlet riser & open drum slot design, provide a non-crimping, flat smooth hose wrap
- Self-lubricated flange bearings & multi-position lock ratchet
- Lubricated factory matched cartridge-style spring motor
- Heavy duty 1" O.D non-corrosive stainless steel rollers
- Cast iron lock ring with non-sparking bronze pawl

## SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- Vacuum Operation
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Construction Sites

## ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories



# P-W & SHW SERIES SPRING DRIVEN WELDING HOSE REELS



## P-W & SHW SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Swivel lock bracket ensures maximum safety
- Swivel Seals: VITON®

### DESIGN & STRUCTURE

- Designed for Oxy-Acetylene or "T" grade welding hose
- Single pedestal reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Coxreels' exclusive Super Hub™ dual axle support system on models with size index #2 & #3

### RETRACTION

- Controlled retraction speed up to 80% slower on **EZ-COIL** models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position non-sparking lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Manufacturing Plants
- Maintenance, Repair & Operations
- Welding / Service Trucks
- Welding Shops
- Garage Settings
- Automotive & Fleet Maintenance
- Pipelines
- Mining, Construction & Railroad Operations

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories

**COXREELS® P-W and SHW Series** spring driven "Welding" hose reels are the ideal solution for managing bulky twin line welding hose. The P-W Series, like the P Series, is more compact in size and shares the reputation for long lasting performance. The SHW Series has a larger chassis and frame to accommodate longer lengths of welding hose and Coxreels' original Super Hub dual axle support system for increased stability during operation, less vibration and greater structural integrity.

### OXYGEN-ACETYLENE WELDING HOSE REELS

Hose supplied on reel is twin-siemese type meeting R.M.A. and C.G.A. type V.D. grade R specifications. Use of other types of hose is not recommended. **Note: Do Not Exceed Listed Hose O.D. To Obtain Max. Length.**

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
P-W-125	1/4"	25	200	46	EZ-P-W-125	P-WL-125†	39	1
P-W-135	1/4"	35	200	48	-	P-WL-135†	40	1
P-W-140	1/4"	40	200	51	-	P-WL-140†	42	1
SHW-N-150	1/4"	50	200	64	EZ-SHW-150	SHWL-N-150†	52	2
SHW-N-160	1/4"	60	200	76	-	SHWL-N-160†	61	3
SHW-N-175	1/4"	75	200	80	EZ-SHW-175	SHWL-N-175†	63	3
SHW-N-1100	1/4"	100	200	84	EZ-SHW-1100	SHWL-N-1100	62	3

To order **EZ-Coil**® equipped models less hose, please add prefix "EZ-". Less hose models comes with inlet hose

### DUAL FUEL WELDING HOSE REELS

Hose supplied on reel is twin-siemese type grade "T." Grade "T" reels and hoses are used for a wide variety of gases, such as MAPP, propane, natural and fuel. **Note: Do Not Exceed Listed Hose O.D. To Obtain Max. Length.**


HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
P-WT-125	1/4"	25	200	46	EZ-P-WT-125	P-WTL-125†	39	1
SHWT-N-150	1/4"	50	200	64	EZ-SHWT-150	SHWTL-N-150†	52	2
SHWT-N-175	1/4"	75	200	80	EZ-SHWT-175	SHWTL-N-175†	63	3
SHWT-N-1100	1/4"	100	200	84	EZ-SHWT-1100	SHWTL-N-1100	62	3

To order **EZ-Coil**® equipped models less hose, please add prefix "EZ-". Less hose models comes with inlet hose

### REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	8 1/2"	18 5/8"	17"	6"	6"	4"	5"
2	10 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
3	10 1/4"	25 1/2"	24"	6"	6"	4"	5"

Overall Dimensions Base Mounting Pattern

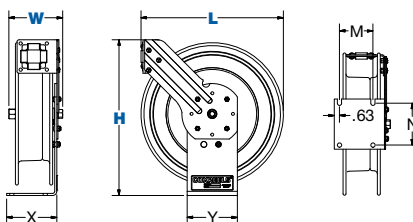

# SPRING DRIVEN WELDING CABLE REELS **P-WC SERIES**

**COXREELS® P-WC Series** spring driven "Welding Cable" reels protect and extend the life of your welding cable by neatly and conveniently storing it on a 25, 35 or 50 foot self-retracting welding cable reel. They are the solution for keeping your work area safe, organized and efficient.


## WELDING CABLE REEL

Protect & extend the life of your welding cable while keeping your work area and vehicles clean & organized. **Caution: When using reel for extended periods of time unwind all cable to prevent heat build up.**

CABLE						LESS CABLE		SIZE INDEX
MODEL	FT.	TYPE	VOLT.	AMPS.	APRX. LBS.	MODEL	APRX. LBS.	
<b>P-WC13-3506</b>	35	6ga	600	75	31	<b>P-WC13L-3506</b>	26	<b>1</b>
<b>P-WC13-5006</b>	50	6ga	600	75	35	<b>P-WC13L-5006</b>	28	<b>1</b>
<b>P-WC13-3504</b>	35	4ga	600	150	34	<b>P-WC13L-3504</b>	26	<b>1</b>
<b>P-WC13-5004</b>	50	4ga	600	150	39	<b>P-WC13L-5004</b>	28	<b>1</b>
<b>P-WC13-3502</b>	35	2ga	600	225	36	<b>P-WC13L-3502</b>	26	<b>1</b>
<b>P-WC17-5002</b>	50	2ga	600	225	56	<b>P-WC17L-5002</b>	42	<b>2</b>
<b>P-WC13-2501</b>	25	1ga	600	300	35	<b>P-WC13L-2501</b>	26	<b>1</b>
<b>P-WC17-5001</b>	50	1ga	600	300	60	<b>P-WC17L-5001</b>	42	<b>2</b>
<b>P-WC13-2510</b>	25	1/0	600	350	37	<b>P-WC13L-2510</b>	26	<b>1</b>
<b>P-WC17-5010</b>	50	1/0	600	350	64	<b>P-WC17L-5010</b>	42	<b>2</b>
<b>P-WC17-3520</b>	35	2/0	600	450	60	<b>P-WC17L-3520</b>	42	<b>2</b>
<b>P-WC17-5020</b>	50	2/0	600	450	68	<b>P-WC17L-5020</b>	42	<b>2</b>

## REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	8½"	14½"	13¾"	5"	6"	3"	5"
<b>2</b>	11"	18¼"	17¼"	6"	6"	4"	5"

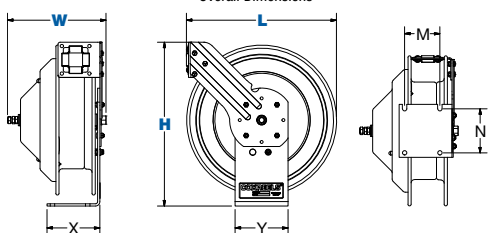

## COXREELS® ACCESSORY

	<b>Electrode Holder</b> Electrode holder features a six-position jaw pattern and has fully insulated, protected springs. # 7685		<b>Grounding Clamp</b> 300 Amp with solid copper jaws & fits cable ballpoint thru 3/0. #7688
---	--	---	---



## P-WC SERIES :: REEL SPECIFICATIONS

### SLIP RING

- External, easily accessible heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 450 AMP rated slip ring

### DESIGN & STRUCTURE

- Designed for electrode & grounding lead applications (each lead requires an individual reel)
- Single pedestal reel with space saving design facilitates workplace organization
- Welding cable clamp available (see below)
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures cable at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Welding / Service Trucks
- Welding Shops
- Garage Settings
- Automotive & Fleet Maintenance
- Pipelines
- Mining, Construction & Railroad Operations
- Marine/Ship Building/ Offshore

### ACCESSORIZE YOUR REEL :: Pg 50

- Mounting Brackets
- Assorted Reel Accessories



# PC<sup>10</sup> SERIES *COMPACT POWER CORD REELS*



## PC<sup>10</sup> SERIES :: REEL SPECIFICATIONS

UL Listed<sup>†</sup> :: Accessories only

### SLIP RING

- External heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 25AMP / 600V rated slip ring
- Include 5' lead cable & grounding plug (except on less cord models)

### DESIGN & STRUCTURE

- Selection of electrical accessories
- Compact & lightweight spring driven cord reel save space & facilitate workplace organization
- CoxComposite™ grommet with continuous radius design that does not pinch or catch the cord during operation
- Solid one piece, 12GA steel base & support post for maximum stability
- ½" solid steel axle & lubricated precision bearings for smooth rotation

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive CoxComposite™ ratchet hub with self lubricating bronze bearings secures cord at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Power Tools
- Light Source
- General Industrial
- Bench Mount
- Manufacturing Plants & Facilities
- Workshops
- Automotive & Fleet Service Centers
- Service / Mechanic / Utility Vehicles

**COXREELS® PC<sup>10</sup> Series Power-Cord Series** is a unique compact addition to our original line of power cord and light reels. This ground-breaking design sets a new bar as the ideal cord management solution capable of fulfilling any commercial or industrial application where space is limited. Modeled after the LG "Little Giant" Series, this Series is equipped with a continuous radius grommet style power cord guide and a unique C-PEP™ Composite hub featuring excellent chemical resistance and additional strength at cold temperatures.

### FOR INDOOR USE ONLY!

All models rated at 115 volts, 60 hz single phase only.


MODEL	ACCESSORY	CORD						SIZE INDEX
		AWG / NO COND.	CORD FT.	TYPE	VOLTS	AMPS	APRX. LBS.	
PC10-3016-A	Single Industrial Receptacle <sup>†</sup>	16 / 3	30	SJO	115	13	14	1
PC10-3012-A		12 / 3	30	SJO	115	20	17	1
PC10-3012-B	Quad "4 Plug" Industrial Receptacle <sup>†</sup>	12 / 3	30	SJO	115	20	18	1
PC10-3016-C	Fluorescent Tube Light - Shock Absorbing & Shatter Resistant <sup>†</sup>	16 / 3	30	SJTO	115	0.3	15	1
PC10-3016-D	Fluorescent Angle Light with Tool Tap Plug <sup>†</sup>	16 / 3	30	SJTO	115	13	16	1
PC10-3016-E	Incandescent Caged Drop Light with Tool Tap Plug <sup>†</sup>	16 / 3	30	SJTO	115	13	14	1
PC10-3016-F	Duplex G.F.C.I. Metal Industrial Receptacle <sup>†</sup>	16 / 3	30	SJO	115	13	16	1
PC10-3012-F		12 / 3	30	SJO	115	20	19	1
PC10-3016-X	With Hose, With Cord, Less Accessory	16 / 3	30	SJO	300	13	14	1
PC10-3012-X		12 / 3	30	SJO	300	20	18	1
PC10L-3016	Less Hose, Less Cord, Less Accessory	16 / 3	30*	SJO	300	13	11	1
PC10L-3012		12 / 3	30*	SJO	300	20	11	1

\*Consult factory with 4 conductor requirements.

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	7 <sup>3</sup> / <sub>8</sub> "	10 <sup>5</sup> / <sub>8</sub> "	10 <sup>1</sup> / <sub>2</sub> "	4 <sup>5</sup> / <sub>8</sub> "	8 <sup>3</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>2</sub> "	6"
Overall Dimensions			Base		Mounting Pattern		

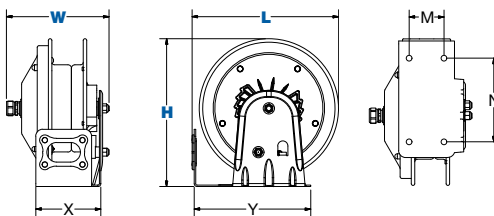



**COXREELS® PC Series** spring driven "Power Cord" reels are heavy duty, industrial grade power sources. They replace tangled extension cords and self-retract to increase safety, productivity and efficiency. Modeled after the P and SH Series, the PC Series are designed for long-lasting, trouble-free performance even under the most demanding conditions.

### FOR INDOOR USE ONLY!

All models rated at 115 volts, 60 hz single phase only.

CORD								AVAILABLE IN <b>EZ-COIL</b>	SIZE INDEX
MODEL	ACCESSORY	AWG / NO COND.	CORD FT.	TYPE	VOLTS	AMPS	APRX. LBS.		
PC13-3516-A <sup>†</sup>	Single Industrial Receptacle <sup>†</sup>	16 / 3	35	SJO	115	13	34	-	1
PC13-5016-A <sup>†</sup>		16 / 3	50	SJO	115	13	36	EZ-PC13-5016-A	1
PC19-7516-A		16 / 3	75	SJO	115	13	60	-	3
PC24-0016-A		16 / 3	100	SJO	115	13	73	EZ-PC24-0016-A	4
PC13-3512-A <sup>†</sup>		12 / 3	35	SJO	115	20	37	-	1
PC13-5012-A <sup>†</sup>	Quad "4 Plug" Industrial Receptacle <sup>†</sup>	12 / 3	50	SJO	115	20	40	EZ-PC13-5012-A	1
PC19-7512-A		12 / 3	75	SJO	115	20	67	-	3
PC24-0012-A		12 / 3	100	SJO	115	20	81	EZ-PC24-0012-A	4
PC13-3512-B <sup>†</sup>		12 / 3	35	SJO	115	20	38	-	1
PC13-5012-B <sup>†</sup>		12 / 3	50	SJO	115	20	41	EZ-PC13-5012-B	1
PC19-7512-B	Fluorescent Tube Light - Shock Absorbing & Shatter Resistant <sup>†</sup>	12 / 3	75	SJO	115	20	68	-	3
PC24-0012-B		12 / 3	100	SJO	115	20	84	EZ-PC24-0012-B	4
PC13-3516-C <sup>†</sup>		16 / 3	35	SJTO	115	0.3	35	-	1
PC13-5016-C <sup>†</sup>		16 / 3	50	SJTO	115	0.3	37	EZ-PC13-5016-C	1
PC24-0016-C		16 / 3	100	SJTO	115	0.3	75	EZ-PC24-0016-C	4
PC13-3516-D <sup>†</sup>	Fluorescent Angle Light with Tool Tap Plug <sup>†</sup>	16 / 3	35	SJTO	115	13	35	-	1
PC13-5016-D <sup>†</sup>		16 / 3	50	SJTO	115	13	37	EZ-PC13-5016-D	1
PC24-0016-D		16 / 3	100	SJTO	115	13	73	EZ-PC24-0016-D	4
PC13-3516-D2		16 / 3	35	SJTO	115	12	35	-	1
PC13-5016-D2		16 / 3	50	SJTO	115	12	37	EZ-PC13-5016-D2	1
PC24-0016-D2	Dual Fluorescent Angle Light with Tool Tap Plug <sup>†</sup>	16 / 3	100	SJTO	115	12	73	EZ-PC24-0016-D2	4
PC13-3516-E <sup>†</sup>		16 / 3	35	SJTO	115	13	34	-	1
PC13-5016-E <sup>†</sup>		16 / 3	50	SJTO	115	13	36	EZ-PC13-5016-E	1
PC19-7516-E		16 / 3	75	SJTO	115	13	60	-	3
PC24-0016-E		16 / 3	100	SJTO	115	13	73	EZ-PC24-0016-E	4
PC13-3516-F <sup>†</sup>	Duplex G.F.C.I. Metal Industrial Receptacle <sup>†</sup>	16 / 3	35	SJO	115	13	36	-	1
PC13-5016-F <sup>†</sup>		16 / 3	50	SJO	115	13	38	EZ-PC13-5016-F	1
PC19-7516-F		16 / 3	75	SJO	115	13	60	-	3
PC24-0016-F		16 / 3	100	SJO	115	13	73	EZ-PC24-0016-F	4
PC13-3512-F <sup>†</sup>		12 / 3	35	SJO	115	20	39	-	1
PC13-5012-F <sup>†</sup>	With Hose, With Cord, Less Accessory	12 / 3	50	SJO	115	20	42	EZ-PC13-5012-F	1
PC19-7512-F		12 / 3	75	SJO	115	20	67	-	3
PC24-0012-F		12 / 3	100	SJO	115	20	83	EZ-PC24-0012-F	4
PC19-7516-X		16 / 3	75**	SJO	115	13	60	-	3
PC24-0016-X		16 / 3	100**	SJO	115	13	71	EZ-PC24-0016-X	4
PC13-5012-X <sup>††</sup>	Less Hose, Less Cord, Less Accessory	12 / 3	50**	SJO	115	20	40	EZ-PC13-5012-X	1
PC19-7512-X		12 / 3	75**	SJO	115	20	66	-	3
PC24-0012-X		12 / 3	100**	SJO	115	20	81	EZ-PC24-0012-X	4
PC17-3510-X <sup>††</sup>		10 / 3	35**	SO	115	30	62	-	2
PC17-5010-X <sup>††</sup>		10 / 3	50**	SO	115	30	67	-	2
PC13L-5016 <sup>††</sup>	Less Hose, Less Cord, Less Accessory	16 / 3	50*	SJO	115	25	31	EZ-PC13L-5016	1
PC19L-7516		16 / 3	75*	SJO	115	25	52	-	3
PC24L-0016		16 / 3	100*	SJO	115	25	62	EZ-PC24L-0016	4
PC13L-5012 <sup>††</sup>		12 / 3	50*	SJO	115	25	29	EZ-PC13L-5012	1
PC19L-7512		12 / 3	75*	SJO	115	25	53	-	3
PC24L-0012	Overall Dimensions	12 / 3	100*	SJO	115	25	64	EZ-PC24L-0012	4
PC17L-5010 <sup>††</sup>		10 / 3	-	-	115	35	49	-	2

\*Consult factory with 4 conductor requirements. \*\*When not using specified cord type capacity may vary.

### REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	8 1/2"	14 7/8"	13 1/2"	5"	6"	3"	5"
2	11"	18 5/8"	17"	6"	6"	4"	5"
3	10 1/8"	21"	19 1/2"	6"	6"	4"	5"
4	10 1/4"	25 1/2"	24"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern



PC24-0016-D



EZ-PC13-5016-C

UL Listed <sup>†</sup>

UL Listed <sup>††</sup>

### PC SERIES :: REEL SPECIFICATIONS

#### SLIP RING

- External heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 25AMP / 600V rated slip ring (35AMP on select models)
- Include 5' lead cable & grounding plug (Except on less cord models)

#### DESIGN & STRUCTURE

- Selection of electrical accessories
- Single pedestal cord reel with space saving design facilitates workplace organization
- Guide arm adjusts to wall, floor & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- Coxreels' exclusive Super Hub™ dual axle support system on models with size index #3 & #4
- 1" solid steel axle & lubricated precision bearings for smooth rotation

#### RETRACTION

- Controlled retraction speed up to 80% slower on EZ-COIL models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor
- Non-corrosive stainless steel spring, pawl & zinc plated ratchet
- Multi-position lock ratchet mechanism secures cord at desired length

#### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

#### POSSIBLE FIELDS OF APPLICATION

- Power Tools
- Light Source
- General Industrial
- Manufacturing Plants
- Workshops
- Automotive & Fleet Service Centers
- Construction Sites

#### ACCESSORIZE YOUR REEL :: PG 50

- Mounting Brackets
- Assorted Reel Accessories

# SD & SDH SERIES *STATIC DISCHARGE CABLE REELS*



**COXREELS®** SD and SDH Series "Static Discharge" cable reels are built heavy duty and designed for long lasting performance. They are specifically design to be used in combustible environments where the static buildup could ignite a spark and subsequent explosion. Static discharge or grounding reels are commonly paired with fuel hose reels found on page 33.

## SPRING STATIC DISCHARGE REELS WITH GALVANIZED CABLE

WITH GALVANIZED CABLE					LESS CABLE		SIZE INDEX
MODEL	FT.	O.D.	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
<b>SD-35</b>	35	5/32"	18	<b>EZ-SD-35</b>	-	-	<b>1</b>
<b>SD-50</b>	50	5/32"	20	<b>EZ-SD-50</b>	<b>SDL-50</b>	18	<b>1</b>
<b>SD-75</b>	75	5/32"	31	<b>EZ-SD-75</b>	-	-	<b>2</b>
<b>SD-100</b>	100	5/32"	32	<b>EZ-SD-100</b>	<b>SDL-100</b>	28	<b>2</b>

To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

## SPRING STATIC DISCHARGE REELS WITH STAINLESS STEEL CABLE

WITH STAINLESS STEEL CABLE					LESS CABLE		SIZE INDEX
MODEL	FT.	O.D.	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
<b>SD-35-1</b>	35	5/32"	18	<b>EZ-SD-35-1</b>	-	-	<b>1</b>
<b>SD-50-1</b>	50	5/32"	20	<b>EZ-SD-50-1</b>	<b>SDL-50</b>	18	<b>1</b>
<b>SD-75-1</b>	75	5/32"	31	<b>EZ-SD-75-1</b>	-	-	<b>2</b>
<b>SD-100-1</b>	100	5/32"	32	<b>EZ-SD-100-1</b>	<b>SDL-100</b>	28	<b>2</b>

To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

## SD & SDH SERIES :: REEL SPECIFICATIONS

### STATIC DISCHARGE

- Available with 7 strand x 7 wire galvanized steel or stainless steel cable
- High visibility orange vinyl cable cover
- Includes cable, ball stop & 50 Amp grounding clamp (100 Amp copper grounding clamp available, consult factory)

### DESIGN & STRUCTURE

- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Commonly paired with fuel reels & used in combustible environment for grounding purposes
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 1/4" steel base for maximum stability
- 1" solid steel axle & lubricated precision bearings for smooth rotation
- Bottom of base is un-powder coated to ground reel

### RETRACTION

- Controlled retraction speed up to 80% slower on **EZ-COIL** models :: See page 7 for details
- Enclosed factory tuned & matched cartridge-style spring motor on SD Series
- Non corrosive stainless steel spring, pawl & zinc plated ratchet on SD Series
- Multi-position non-sparking lock ratchet mechanism secures cable at desired length on SD Series
- Simple design with direct hand crank action on SDH Series

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Fuel / Service Trucks
- Fuel Storage & Dispensing Systems
- Ground Support
- Aviation Static Grounding
- Aviation Refueling
- Vehicle Refueling
- Marine / Ship Refueling / Offshore
- Oil Refinery

### ACCESSORIZE YOUR REEL :: Pg 50

- Mounting Brackets
- Assorted Reel Accessories

## HAND CRANK STATIC DISCHARGE REELS WITH GALVANIZED CABLE

WITH GALVANIZED CABLE				LESS CABLE		SIZE INDEX
MODEL	FT.	O.D.	APRX. LBS.	MODEL	APRX. LBS.	
<b>SDH-100</b>	100	5/32"	24	-	-	<b>3</b>
<b>SDH-200</b>	200	5/32"	28	<b>SDHL-200</b>	20	<b>3</b>

## HAND CRANK STATIC DISCHARGE REELS WITH STAINLESS STEEL CABLE

WITH GALVANIZED CABLE				LESS CABLE		SIZE INDEX
MODEL	FT.	O.D.	APRX. LBS.	MODEL	APRX. LBS.	
<b>SDH-100-1</b>	100	5/32"	24	-	-	<b>3</b>
<b>SDH-200-1</b>	200	5/32"	28	<b>SDHL-200</b>	20	<b>3</b>

## REEL DIMENSIONS

Technical Data Sheets Available On Website


SIZE INDEX	W	H	L	X	Y	N
<b>1</b>	3 7/8"	11 1/2"	11"	2 1/2"	6"	4"
<b>2</b>	4"	15"	14 1/2"	2 1/2"	6"	4"
<b>3</b>	5 3/4"	11 1/2"	11"	2 1/2"	6"	4"

Overall Dimensions


Base

Mounting Pattern

SD Series

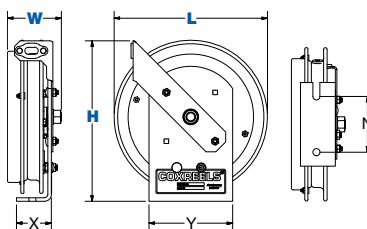

SDH Series

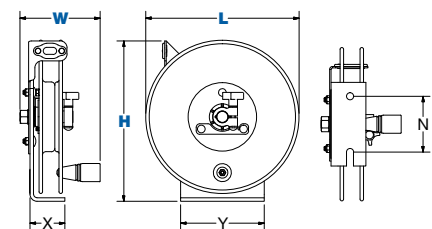

# NITRO-PRO® SERIES ALUMI-PRO® SERIES

**COXREELS® Alumi-Pro® Series** "Aluminum Professional-Grade" spring driven hose reels have the strength of steel without the weight! The Alumi-Pro® series is modeled after Coxreels' popular P Series line of hose reels, but are uniquely constructed out of high quality aluminum. They're compact, lightweight and non-corrosive making them the perfect choice when polypropylene or plastic hose reels are not the preferred choice due to their limited strength and durability.

## ALUMI-PRO® SERIES

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
P-LP-125-AL	1/4"	1/2"	25	300	18	P-LPL-125-AL	15	1
P-LP-150-AL	1/4"	1/2"	50	300	25	P-LPL-150-AL	18	3
P-LP-325-AL	3/8"	5/8"	25	300	19	P-LPL-325-AL	16	2
P-LP-350-AL	3/8"	5/8"	50	300	27	P-LPL-350-AL	20	3
P-LP-425-AL	1/2"	3/4"	25	300	29	P-LPL-425-AL	22	4
P-LP-430-AL	1/2"	3/4"	30	300	31	P-LPL-430-AL	22	4

**COXREELS® Nitro-Pro® Series** spring driven hose reels are the only nitrogen hose reels specifically engineered, tested and approved for use with nitrogen tire inflation systems. These professional-grade specialty reels feature compact space-saving size and heavy duty construction for flexible installation and long-lasting performance. The EZ-Coil® model features Coxreels' patented rewind safety system that retracts up to 80% slower than conventional spring driven reels. This reel is specifically designed to reduce workplace accidents and increase operator safety.

## NITRO-PRO® SERIES

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
P-NP-350	3/8"	5/8"	50'	300	43	P-NPL-350	36	3

To order EZ-Coil® equipped models less hose, please add prefix "EZ-"

## REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
1	5 7/8"	14 7/8"	13 1/2"	5"	6"	3"	5"
2	6 1/2"	14 7/8"	13 1/2"	5"	6"	3"	5"
3	6 3/4"	18 5/8"	17 1/8"	6"	6"	4"	5"
4	7"	18 5/8"	17 1/8"	6"	6"	4"	5"

Overall Dimensions

Base

Mounting Pattern

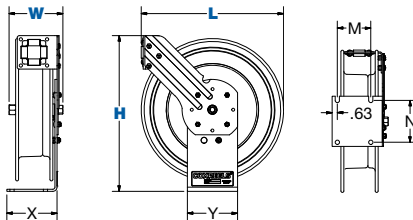

## NITRO-PRO® & ALUMI-PRO® SERIES :: REEL SPECIFICATIONS

### ALUMI-PRO® SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE

### ALUMI-PRO® DESIGN / STRUCTURE

- Single pedestal reel for applications that require professional grade strength without the weight
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Industrial strength CPC™ powder coated aluminum construction
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### NITRO-PRO® SWIVEL

- Nitrogen quality seals in the machined from solid brass 90° full-flow NPT swivel

### NITRO-PRO® DESIGN / STRUCTURE

- Designed for nitrogen tire inflation systems
- Guide arm adjusts to wall, floor, vehicle & overhead positions
- Solid one piece, heavy gauge 1/4" steel base & support post for maximum stability
- Durable special "Nitrogen Green" proprietary CPC™ powder coat finish
- Green nitrogen hose & hose stop to adjust lead length
- 1" solid steel axle & lubricated precision bearings for smooth rotation

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Nitrogen Dispensing
- Tire Services
- Automotive Dealerships
- Automotive & Fleet Service Centers
- Service / Mechanic Trucks
- Air/Water Services
- Pneumatic Tools
- Chemical Fluid Transfer
- Lightweight Unit Requirements
- Service / Mechanic Trucks


### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories





# PURE FLOW SERIES *BREATHING AIR & CLEAN FLUID HOSE REELS*

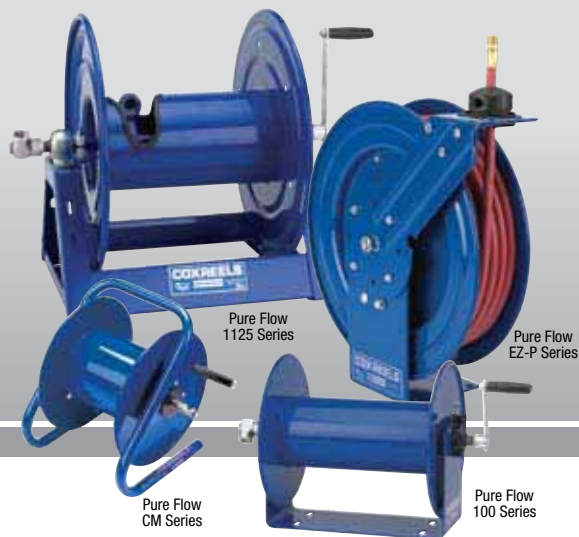

**COXREELS® Pure Flow Series** is offered in spring rewind, hand crank and motorized retractions. All Pure Flow hose reels come standard equipped with stainless steel air/fluid paths and stainless steel swivels with non-toxic, food quality grease, ensuring clean, non-contaminated, safe and reliable transfer of breathing air, potable water or other clean fluids.

## PURE FLOW EZ-P SERIES

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
**Note: Do not exceed listed hose O.D. to obtain maximum length.**

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>EZ-P-BLL-350</b>	3/8"	5/8"	50	300	43	<b>1</b>
<b>EZ-P-BHL-350</b>	3/8"	5/8"	50	6000	43	<b>1</b>

## PURE FLOW EZ-T SERIES

Models with hose are for air or water service with a maximum temperature 150° F. Models less hose can be used for air, water or oil.  
**Note: Do not exceed listed hose O.D. to obtain maximum length.**

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>EZ-T-BLL-3100</b>	3/8"	5/8"	100	300	85	<b>2</b>
<b>EZ-T-BHL-3100</b>	3/8"	5/8"	100	6000	85	<b>2</b>

## PURE FLOW 100 SERIES

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>112P-3-8</b>	3/8"	5/8"	100	4,000	19	<b>3</b>

## PURE FLOW CM SERIES

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>112P-3-8-CM</b>	3/8"	5/8"	100	4,000	18	<b>3</b>

## PURE FLOW 1125 SERIES

LESS HOSE										SIZE INDEX
MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	PSI	APRX. LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
<b>1125P-4-6</b>	1/2"	7/8"	100	3/8"	3/4"	140	1/2" F NPT	6,000	36	<b>4</b>
<b>1125P-4-8</b>	1/2"	7/8"	150	3/8"	3/4"	200	1/2" F NPT	6,000	37	<b>5</b>
<b>1125P-4-12</b>	1/2"	7/8"	200	3/8"	3/4"	300	1/2" F NPT	6,000	39	<b>6</b>

## MOTOR OPTIONS

When ordering, suffix the model number with selection below. \*Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>E</b>	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
<b>EB</b>	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF.	115V 1/2 HP REW., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W		H		L	X	Y		M	N	Ø	Dw
	CRANK / ELEC / SPRING	AIR / HYD.	CRANK / SPRING	MOTOR			CRANK / SPRING	MOTOR				
<b>1</b>	7 1/8"	-	18 5/8"	-	17 1/8"	6"	6"	-	4"	5"	11 1/8"	3 3/4"
<b>2</b>	9 3/8"	-	25 1/2"	-	24"	8"	9"	-	7"	8"	15 3/4"	4 1/2"
<b>3</b>	18 1/4"	-	13"	-	12"	9 1/2"	6"	-	5 1/2"	3"	5 1/2"	8"
<b>4</b>	19 3/4"	17"	18 5/8"	19 1/4"	17 5/8"	11 3/8"	15 3/8"	16"	9 7/16"	10"	6 1/4"	6"
<b>5</b>	21 3/4"	19"	18 5/8"	19 1/4"	17 5/8"	13 3/8"	15 3/8"	16"	11 7/16"	10"	6 1/4"	8"
<b>6</b>	25 3/4"	23"	18 5/8"	19 1/4"	17 5/8"	17 3/8"	15 3/8"	16"	15 7/16"	10"	6 1/4"	12"

Overall Dimensions

Base

Mounting Pattern

Drum

- See page 11 For P Series dim drawing
- See page 13 For T Series dim drawing
- See page 54 For 100 Series dim drawing

- See page 55 For CM Series dim drawing
- See page 58 For 1125 Series dim drawing

## PURE FLOW SERIES :: REEL SPECIFICATIONS

### SWIVEL

- Non-corrosive stainless steel air/fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease

### DESIGN & STRUCTURE

- Safely store respiratory air hose lines for low or high pressure breathing air systems
- Safely store potable water hose lines for drinking water systems
- Safely store any hose requiring sanitized & non-contaminated fluid transfer application
- Each of these reels is built of their standard series with their own unique features & benefits

### RETRACTION

- See page 11 for P Series retraction features
- See page 13 for T Series retraction features
- See page 36 for 100 Series retraction features
- See page 37 for CM Series retraction features
- See page 40 for 1125 Series retraction features

## SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- Low Pressure Breathing Air Systems
- High Pressure Breathing Air Systems
- Fire Rescue
- Medical & Hospital Air Services
- Mining/Tunneling Operations
- Pharmaceutical Manufacturing
- Marine/Docks/Offshore
- High Pressure Cylinder Filling (SCUBA/SCBA)
- Shot Blasting
- Tank Cleaning
- Spray Painting
- Hazardous Site Cleanup
- Commercial Kitchens
- Pre-Rinse
- Potable Water
- Bulk Food
- Food Grade Washdown
- Food & Chemical Processing Plants

## ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Hoses
- Assorted Reel Accessories



**COXREELS®** MPD, TDMP and 1275HP Series “Dual Hydraulic” hose reels have similar features to their related series, but have been redesigned to handle dual hydraulic applications. Choose between spring driven retraction at 3,000 PSI to 50 feet and hand crank or motorized models at 10,000 PSI to 200 feet.

## MPD SERIES

Medium pressure reels are furnished standard with dual-hydraulic hose banded together every 2-3 feet with power strip-type clamps. Maximum temperature 250° F.

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
N/A	-	-	-	-	-	MPDL-N-150	62	1
MPD-N-330	3/8"	1 1/16"	30	3000	78	MPDL-N-330	62	1
MPD-N-430	1/2"	1 3/16"	30	2500	79	MPDL-N-430	62	1

## TDMP SERIES

Medium pressure reels are furnished standard with dual-hydraulic hose banded together every 2-3 feet with power strip-type clamps. Maximum temperature 250° F.

HOSE						LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
TDMP-N-350	3/8"	1 1/16"	50	3000	104	TDMP-L-N-350	79	2
TDMP-N-450	1/2"	1 3/16"	50	2500	106	TDMP-L-N-450	79	2

## 1275HP SERIES

10,000 psi - two 1/4" 90° inlets. These reels are an essential component to operate hydraulic tools requiring 10,000 psi can be easily managed safely for efficient use in emergency situations.

LESS HOSE								SIZE INDEX
MODEL	DESCRIPTION	INLET	OUTLET	CAPACITY 1/4" I.D.	CAPACITY 3/8" I.D.	PSI	APRX. LBS.	
1275HPL-4-8	Rim Rewind	1/4"	1/2"	135'	85'	10,000*	37	3
1275HPL-4-8-C	Geared Crank	1/4"	1/2"	135'	85'	10,000*	43	3
1275HPL-4-8-A	Air Motor	1/4"	1/2"	135'	85'	10,000*	50	3
1275HPL-4-8-E	Electric Motor	1/4"	1/2"	135'	85'	10,000*	68	3
1275HPL-4-12	Rim Rewind	1/4"	1/2"	200'	125'	10,000*	39	4
1275HPL-4-12-C	Geared Crank	1/4"	1/2"	200'	125'	10,000*	45	4
1275HPL-4-12-A	Air Motor	1/4"	1/2"	200'	125'	10,000*	52	4
1275HPL-4-12-E	Electric Motor	1/4"	1/2"	200'	125'	10,000*	70	4

## SUFFIX “4” OUTLET/ADAPTER OPTIONS

The option “4” is standard but can be adapted for your specific need. Simply replace “4” with an “A, B, C or D” option:

**A** = -4 JIC Male - # **7818**

**B** = -5 JIC Male # **7817** & 1/2" x 3/8" Reducer - # **7540**

**C** = 1/4" BSP Female - # **7821**

**D** = M14 X 1.5 Female - # **7848**

\*Use of non-standard outlet/adapter options may reduce typical working pressure safety. Refer to page 50 for specific pressure ratings



## DP SERIES

See page 21 for high capacity spring driven dual hydraulic reels



## 1275 SERIES

See page 44 for medium pressure dual hydraulic hose hand crank & motorized reel



## MPD, TDMP & 1275HP SERIES :: REEL SPECIFICATIONS

### MPD SERIES

- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: TEFLON
- Sturdy single pedestal design with Coxreels' exclusive Super Hub™ dual axle support system
- One-sided supply/return hookup
- See page 12 for series features

### TDMP SERIES

- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: TEFLON
- Sturdy dual pedestal design with Coxreels' exclusive Super Hub™ dual axle support system
- One-sided supply/return hookup
- See page 13 for series features

### 1275HP SERIES

- Two high pressure 90° full-flow melanized steel 1/4" swivel inlets
- Swivel Seals: VITON®
- Designed for dual hydraulic emergency rescue systems & other high pressure hydraulic tools
- Sturdy all welded steel “A” frame, not bolted to strengthen the reel structure
- Two low profile outlet risers & open drum slot design for flat smooth hose wrap (must specify the type of outlets, see outlet options)

## SIGNATURE FEATURES


- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- Service / Mechanic Trucks
- Emergency Situations
- Garage Settings
- Mining, Construction & Railroad Operations
- Hydraulic Rescue Tools
- Fire Rescue
- Cranes

## ACCESSORIZE YOUR REEL :: Pg 50

- O-Rings & Swivels
- Hoses
- Mounting Brackets
- Assorted Reel Accessories

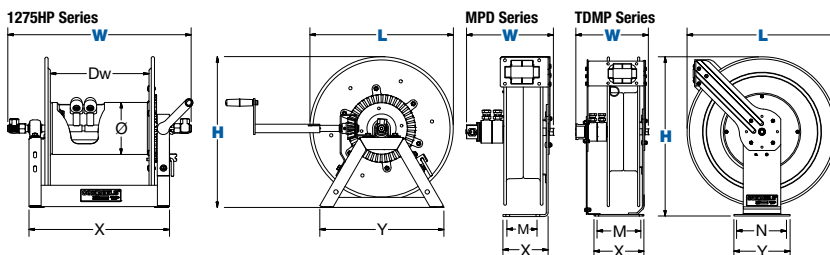

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W			H		L	X	Y		M	N	Ø	Dw
	CRANK / SPRING	ELEC.	AIR	CRANK / SPRING	ELEC.			CRANK / SPRING	ELEC.				
1	11 1/2"	-	-	21 1/8"	-	19 1/2"	6"	6"	-	4"	5"	-	-
2	11 5/8"	-	-	25 1/2"	-	24"	8"	9"	-	7"	8"	-	-
3	17 1/2"	20 1/4"	19 1/4"	18 5/8"	19 1/8"	17 5/8"	13 3/8"	15 3/8"	16"	11 1/16"	10"	6 1/4"	8"
4	21 1/2"	24 1/4"	23 1/4"	18 5/8"	19 1/8"	17 5/8"	17 3/8"	15 3/8"	16"	15 7/16"	10"	6 1/4"	12"

Overall Dimensions

Base

Mounting Pattern

Drum



**COXREELS® SS Series** “Stainless Steel” spring driven hose reels have similar features to their related series, but are constructed of high quality electro-polished stainless steel with stainless steel fluid paths. They offer clean, non-corrosive performance in applications that require it, such as food and chemical processing, marinas, and anywhere that rust, corrosion and contamination thrive.

### P SERIES - Spring Rewind

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>P-LPL-335-SS</b>	3/8"	2 1/32"	35	300	34	<b>1</b>
<b>P-LPL-350-SS</b>	3/8"	2 1/32"	50	300	39	<b>1</b>
<b>P-LPL-425-SS</b>	1/2"	2 1/32"	25	300	39	<b>2</b>

### SH, & MP SERIES - Spring Rewind

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>SHL-N-350-SS</b>	3/8"	2 1/32"	50	300	44	<b>3</b>
<b>SHL-N-450-SS</b>	1/2"	2 7/32"	50	300	46	<b>3</b>
<b>SHL-N-525-SS</b>	3/4"	1 5/32"	25	300	45	<b>4</b>
<b>MPL-N-350-SS</b>	3/8"	5/8"	50	3000	53	<b>3</b>
<b>MPL-N-450-SS</b>	1/2"	3/4"	50	2500	53	<b>3</b>

### T SERIES - Spring Rewind


LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>TSHL-N-4100-SS</b>	1/2"	2 7/32"	100	300	80	<b>5</b>
<b>TSHL-N-550-SS</b>	3/4"	1 5/32"	50	300	70	<b>6</b>

### EN SERIES - Spring Rewind

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>ENL-N-335-SS</b>	3/8"	2 1/32"	35	300	46	<b>7</b>
<b>ENL-N-350-SS</b>	3/8"	2 1/32"	50	300	58	<b>8</b>
<b>ENL-N-450-SS</b>	1/2"	2 7/32"	50	300	61	<b>8</b>

### REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N
<b>1</b>	6 3/4"	18 5/8"	17 1/8"	6"	6"	4"	5"
<b>2</b>	7"	18 5/8"	17 1/8"	6"	6"	4"	5"
<b>3</b>	8 1/4"	21 1/4"	19 1/2"	6"	6"	4"	5"
<b>4</b>	9 3/8"	21 1/4"	19 1/2"	6"	6"	4"	5"
<b>5</b>	9 3/8"	25 1/2"	24"	8"	9"	7"	8"
<b>6</b>	9 7/8"	25 1/2"	24"	8"	9"	7"	8"
<b>7</b>	6 7/8"	18 7/8"	19"	6"	6"	4"	5"
<b>8</b>	8 1/2"	21 3/4"	21 7/8"	6"	6"	4"	5"

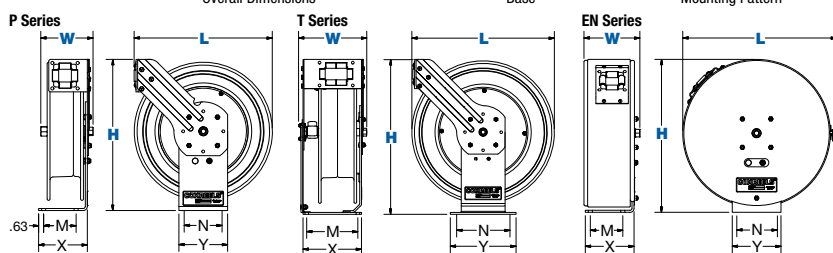

### SS SERIES - SPRING - REEL SPECIFICATIONS

#### SWIVEL

- Non-corrosive external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease

#### DESIGN & STRUCTURE

- Electro-polished stainless steel finish
- Each of these reels is built of their standard series with their own unique features & benefits

#### RETRACTION

- See page 11 For P Series spring driven features
- See page 12 For SH & MP Series spring driven features
- See page 13 For T Series spring driven features
- See page 16 For EN Series spring driven features

#### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

#### POSSIBLE FIELDS OF APPLICATION

- Corrosive Environments
- Hygienic Environments
- Medical Services
- Marine/Docks/Offshore
- Manufacturing Plants & Facilities
- Pulp & Paper Plants
- Food & Chemical Processing Plants
- Bottling Plants
- Dairies
- Meat Packing
- Grocery Stores
- Restaurants & Commercial Kitchens
- Water Treatment & Supply
- Petrochemical
- Food Grade Washdown

#### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Mounting Brackets
- Hoses
- Assorted Reel Accessories




**COXREELS® DEF Series** are equipped with a stainless steel external full-flow swivel and chemical resistant Viton® seals to provide a safe, reliable Diesel Exhaust Fluid (DEF) dispensing solution. The swivel is easy to access for simple seal maintenance and fast DEF dispenser hose installation. Coxreels® professional DEF reeling systems are available in heavy-duty single pedestal (SH Series) or supreme-duty dual pedestal (T Series) configurations. Both versatile designs are outfitted with Coxreels' original Super Hub™ dual axle support systems to increase stability and reduce vibration during operation, making these reels the perfect DEF handling solutions for either stationary or rugged mobile applications.

## DEF-SH SERIES MODELS

Models are equipped with DEF hose **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
-	1/2"	7/8"	50	300	-	-	*SHL-N-450-BBX	46	2
SH-N-525-DF-BBX	3/4"	1 1/8"	25	300	57	EZ-SH-525-DF-BBX	SHL-N-525-BBX	45	3
SH-N-550-DF-BBX	3/4"	1 1/8"	50	300	76	EZ-SH-550-DF-BBX	SHL-N-550-BBX	56	6

\* EZ-Coil® option only available on these less hose models. Please add prefix "EZ-"

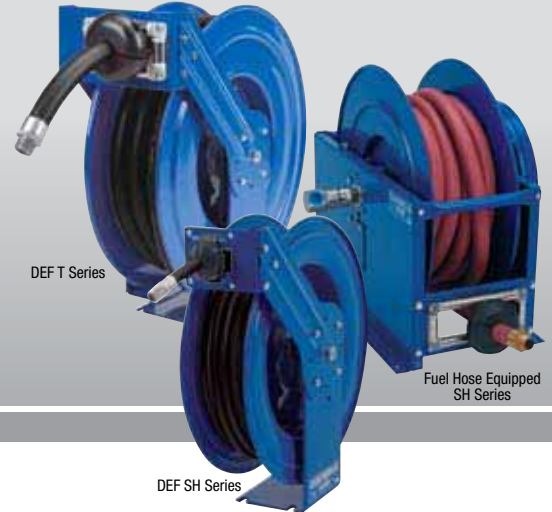

## DEF-T SERIES MODELS

Models are equipped with DEF hose **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
-	1/2"	7/8"	50	300	-	-	*TSHL-N-450-BBX	55	1
-	3/4"	1 1/8"	35	300	-	-	*TSHL-N-535-BBX	67	3
TSH-N-550-DF-BBX	3/4"	1 1/8"	50	300	91	EZ-TSH-550-DF-BBX	TSHL-N-550-BBX	70	3
-	1"	1 3/8"	35	300	-	-	TSHL-N-635-BBX	71	5
-	1"	1 3/8"	50	300	-	-	TSHL-N-650-BBX	77	4

\* EZ-Coil® option only available on these less hose models. Please add prefix "EZ-"

**COXREELS® Fuel Dispensing Reels** are designed to handle various non-aromatic fuel applications including diesel, kerosene, fuel oil and heating oil. Coxreels® professional fuel dispensing reels are available in heavy-duty single pedestal (SH Series), supreme-duty dual pedestal (T Series) or box-style frame (SP Series) configurations. These fuel reels are an essential component found in utility, ground support, and bulk liquid handling transport services mounted on fuel storage & dispensing systems, fuel/lube trucks, aircraft refuelers, and tank trucks. The convenient uncoiling systems with the added hose control allow the operator to efficiently handle fuel transfers.

## FUEL HOSE SH SERIES

Models are equipped with fuel hose **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
SHF-N-525	3/4"	1 3/16"	25	300	57	EZ-SHF-525	*SHL-N-525-BXN	45	3

\* EZ-Coil® option only available on these less hose models. Please add prefix "EZ-"

## FUEL HOSE T SERIES

Models are equipped with fuel hose **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	AVAILABLE IN EZ-COIL	MODEL	APRX. LBS.	
TSHF-N-550	3/4"	1 3/16"	50	300	91	EZ-TSHF-550	*TSHL-N-550-BXN	70	5
TSHF-N-575	3/4"	1 3/16"	75	300	105	-	TSHL-N-575-BXN	73	8
TSHF-N-635	1"	1 1/2"	35	300	95	-	TSHL-N-635-BXN	71	6
TSHF-N-650	1"	1 1/2"	50	300	101	-	TSHL-N-650-BXN	77	8

\* EZ-Coil® option only available on these less hose models. Please add prefix "EZ-"

## FUEL HOSE SP SERIES

Models are equipped with fuel hose **Note: Do not exceed listed hose O.D. to obtain maximum length.**

HOSE							LESS HOSE		SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	
SLPF-550	3/4"	1 3/16"	50	300	3/4"	107	SLPL-550	86	2
SLPF-650	1"	1 1/2"	50	300	1"	142	SLPL-650	109	6

## REEL DIMENSIONS

- Please see noted series page for designated SIZE INDEX reference
- See page 12 For DEF SH Series dim drawings
  - See page 12 For Fuel Hose Equipped SH Series dim drawings
  - See page 13 For DEF T Series dim drawings
  - See page 13 For Fuel Hose Equipped T Series dim drawings
  - See page 20 for Fuel Hose Equipped SP Series dim drawings

## DEF & FUELING SERIES :: REEL SPECIFICATIONS

### DEF SERIES SWIVEL

- Non-corrosive stainless steel 90° full flow NPT swivel for Diesel Exhaust Fluid (DEF) dispensing applications.
- Swivel seals: Viton®

### DEF SERIES HOSE

- DEF dispensing hose designed to convey the high-purity, aqueous urea solution DEF. Temperature Range: -40°F to +257°F

### FUEL SERIES SWIVEL

- Machined from solid brass 90° full-flow NPT swivel inlet for fuel dispensing applications. Electroless nickel plated steel swivel on 1" models
- Swivel seals: Nitrile

### FUEL SERIES HOSE

- Fuel dispensing hose designed to convey non-aromatic fuels including diesel, kerosene, fuel oil & heating oil. Temperature Range: -20°F to +190°F

### DESIGN & STRUCTURE

- Each of these reels is built of their standard series with their own unique features & benefits

### RETRACTION

- See page 12 for SH Series spring driven features
- See page 13 for T Series spring driven features
- See page 20 for SP Series spring driven features

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Vehicle Refueling
- Tank Trucks
- Fuel/Lube Trucks
- Fuel Storage & Dispensing Systems
- DEF Storage & Dispensing Systems
- Aircraft Refueling
- Marine/Ship Refueling/Offshore

### ACCESSORIZE YOUR REEL :: Pg 50

- O-Rings & Swivels
- Hoses
- Mounting Brackets
- Assorted Reel Accessories

### PROFESSIONAL GRADE FEATURES

**HEAVY DUTY SOLID SPUN DISCS WITH ROLLED EDGES** - Not stamped, made with first of its kind CNC robotic spinning cell

**LOW PROFILE RISER & OPEN DRUM SLOT** for smooth, even hose wraps

**INDUSTRIAL GRADE BRASS**, machined from solid, full flow swivel with external fluid path for ease of seal maintenance

Steel swivel for reels with 1, 1½ & 2" I.D.

**PERMANENTLY SEALED PILLOW BLOCK BEARINGS** for easy rotation

**HIGH QUALITY STEEL CONSTRUCTION** with our durable CPC™ powder coat finish

**ONE PIECE ALL CNC ROBOTICALLY WELDED** steel "A" frame construction

**ALSO AVAILABLE WITH STAINLESS STEEL** construction & swivel

### ELECTRIC MODELS FEATURE:

**1125 SERIES FEATURES A SOLID STEEL HALO** welded to the disc for a direct gear driven motor. Chain & sprocket rewind on 1175, 1185 & 1195 Series

**CHOICE OF MOTORS** to customize your reel to your specific needs



Option - A  
Air Motor  
4 Gast




Option - AB  
Air Motor  
6 Gast



Option - E & EF  
12V & 24V Motor



Option - EA, EB & ED  
Explosion Proof  
12V, 24V & 115V



Option - H  
Hydraulic Motor

Go online to view videos of features & benefits  
[www.COXREELS.com](http://www.COXREELS.com)

MOTORIZED

HAND CRANK






**1175 SERIES**

**1195 SERIES**

**1125 SERIES**


**CHOICE OF ACCESSORIES:**

**CHOICE OF 3 OR 4 WAY ROLLER BRACKETS**  
in top, bottom or overhead rewind applications

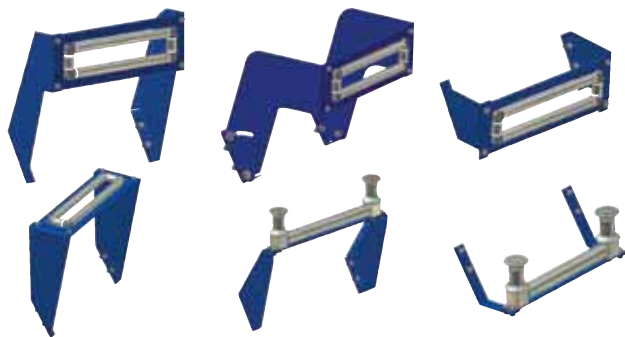


**BUILDING ON THE STRENGTHS OF  
EACH OTHER TO CREATE A FAMILY OF  
REELS TO MEET YOUR NEEDS**

**CHOICE OF ELECTRICAL COMPONENTS**  
from switches, to relays & speed controllers

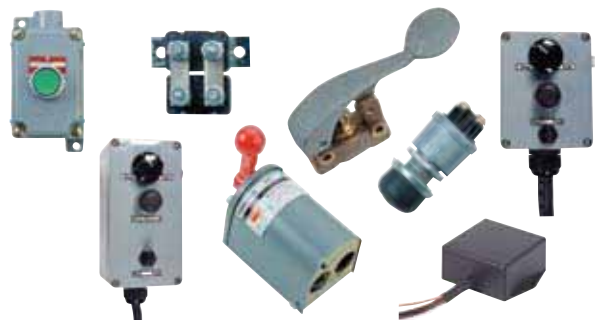



# 100 SERIES COMPACT HAND CRANK HOSE REELS

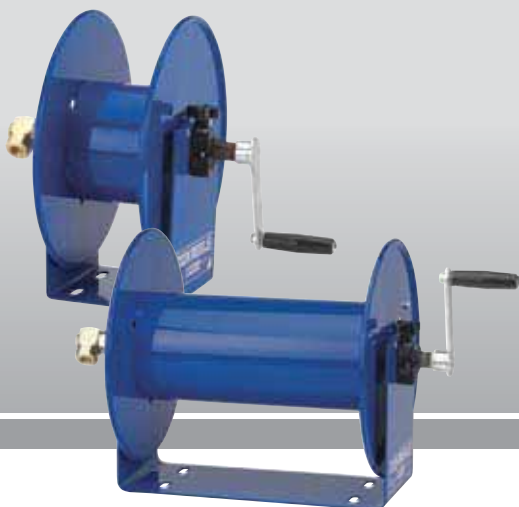

**COXREELS® 100 Series** hand crank hose reels are **lightweight, compact, versatile reels that perform at working pressures up to 4,000 PSI.** Save time and effort while increasing the safety of your work environment. The sturdy "U" shaped frame and all steel construction make this one tough little reel. All listed models are supplied less hose. Stainless steel models are available.

## 100 SERIES MODELS

LESS HOSE									SIZE INDEX
MODEL	STANDARD CAPACITY			OPTIONAL CAPACITY Reducer Required			PSI	APRX LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.			
112-3-50	3/8"	5/8"	50	1/4"	1/2"	85	4,000	15	1
112-3-100	3/8"	5/8"	100	1/4"	1/2"	150	4,000	19	2
112-3-150	3/8"	5/8"	150	1/4"	1/2"	225	4,000	21	3
117-3-250	3/8"	5/8"	250	1/4"	1/2"	350	4,000	30	4
117-3-400	3/8"	5/8"	400	1/4"	1/2"	550	4,000	33	5
117-3-550	3/8"	5/8"	550	1/4"	1/2"	800	4,000	35	6
112-4-75	1/2"	7/8"	75	3/8"	3/4"	100	4,000	21	3
117-4-225	1/2"	7/8"	225	3/8"	3/4"	315	4,000	31	5
117-4-350	1/2"	7/8"	350	3/8"	3/4"	450	4,000	37	6
117-5-100	3/4"	1 1/4"	100	1/2"	1"	150	4,000	35	7

## 100 SERIES:: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Up to 4,000 PSI working pressure
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Professional grade, compact & lightweight design
- Open drum design for no hassle hose wrap
- Solid one piece, heavy gauge steel "U" shaped frame
- Adjustable tension brake to prevent "free-wheeling" during operation, transport or storage

### RETRACTION

- Direct hand crank rewind

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Water Supply
- Washdown
- Pressure Washing
- Agricultural Spraying
- Chemical Fluid Transfer
- Ground Maintenance
- Farming
- Construction Sites
- General Landscape/ Turf Care
- Home Gardening

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Assorted Reel Accessories

## REEL DIMENSIONS

Technical Data Sheets Available On Website




SIZE INDEX	W	H	L	X	Y	M	N	Ø	Dw
<b>1</b>	14 1/2"	13"	12"	6"	6"	4"	3"	5 1/2"	4 1/2"
<b>2</b>	18 1/4"	13"	12"	9 1/2"	6"	5 1/2"	3"	5 1/2"	8"
<b>3</b>	22 3/4"	13"	12"	14"	6"	10"	3"	5 1/2"	12 1/2"
<b>4</b>	18 1/4"	18"	17"	9 1/2"	6"	5 1/2"	3"	5 1/2"	8"
<b>5</b>	22 3/4"	18"	17"	14"	6"	10"	3"	5 1/2"	12 1/2"
<b>6</b>	28 1/4"	18"	17"	19 1/2"	6"	15 1/2"	3"	5 1/2"	18"
<b>7</b>	23 1/4"	18"	17"	14"	6"	10"	3"	5 1/2"	12 1/2"

Overall Dimensions

Base

Mounting Pattern

Drum



**COXREELS®** CM Series “Caddy Mount” and DM Series “Dolly Mount” hand crank hose reels offer lightweight, compact portability for long lengths of hose.

Eliminate the task of manually coiling and uncoiling hose and easily transport it to the job site on wheels. High pressure applications are no problem with a 4,000 PSI rating. Also, a 4' inlet hose with 3/4" female fitting and male garden adaptor is available with this series for use with garden hose. See options below.

## CM SERIES MODELS - CADDY MOUNT

LESS HOSE									SIZE INDEX
MODEL	STANDARD CAPACITY			OPTIONAL CAPACITY Reducer Required			PSI	APRX LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.			
<b>112-3-100-CM</b>	3/8"	5/8"	100	1/4"	1/2"	150	4,000	18	<b>1</b>
<b>112-3-150-CM</b>	3/8"	5/8"	150	1/4"	1/2"	225	4,000	22	<b>2</b>
<b>117-4-225-CM</b>	1/2"	7/8"	225	3/8"	3/4"	315	4,000	28	<b>3</b>

## DM SERIES MODELS - DOLLY MOUNT

LESS HOSE									SIZE INDEX
MODEL	STANDARD CAPACITY			OPTIONAL CAPACITY Reducer Required			PSI	APRX LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.			
117-3-200-DM	3/8"	5/8"	200	1/4"	1/2"	350	4,000	37	
117-4-225-DM	1/2"	7/8"	225	3/8"	3/4"	315	4,000	39	

## REEL DIMENSIONS

Technical Data Sheets Available On Website


SIZE INDEX	W	H	L	X	Y	M	N	Ø	Dw
<b>1</b>	18 1/2"	14 3/4"	13 1/8"	11 1/2"	10 5/8"	10 1/2"	5 1/4"	5 1/2"	8"
<b>2</b>	23"	14 3/4"	13 1/8"	16"	10 1/2"	10 1/2"	5 1/4"	5 1/2"	12 1/2"
<b>3</b>	23"	18 1/2"	18"	16"	12 5/8"	10 1/2"	5 1/4"	5 1/2"	12 1/2"
<b>4</b>	19"	36 1/4"	21"	12"	17 1/2"	-	-	5 1/2"	8"
<b>5</b>	23 1/2"	36 1/4"	21"	16 1/2"	17 1/2"	-	-	5 1/2"	12 1/2"

Overall Dimensions


Base

Mounting Pattern

Drum

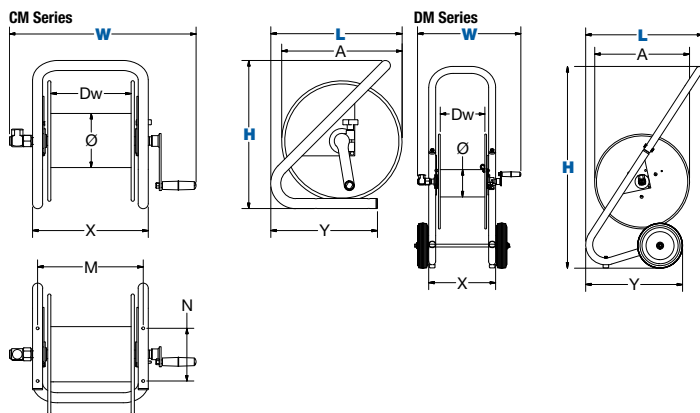

## COXREELS® 1/2" HOSE ACCESSORY



### Garden Hose Kit

You are able to connect any hose to a reel with 1/2" plumbing. You will be able to use any garden hose for everything from watering plants to washing your car. Kit includes: NPT to garden hose adaptor & adaptor hose **#15717**



## CM & DM SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Up to 4,000 PSI working pressure
- Swivel Seals: NITRILE

### CM SERIES DESIGN & STRUCTURE

- High quality one piece 1" steel tube frame structure
- Hose Control bar prevents hose from slipping off the discs
- Adjustable tension brake to prevent “free-wheeling”
- Base has holes for temporary or permanent installation

### DM SERIES DESIGN & STRUCTURE

- High quality three piece 1-1/4" steel tube frame structure
- Solid 8" rubber tires for easy transport
- Rubber front feet prevent reel from slipping forward
- Removable handle allow for compact storage
- Adjustable tension brake to prevent “free-wheeling”

### RETRACTION

- Direct hand crank rewind

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION


- Water Supply
- Washdown
- Pressure Washing
- Agricultural Spraying
- Chemical Fluid Transfer
- Ground Maintenance
- Restaurants
- Construction Sites
- General Landscape/Turf Care
- Home Gardening

### ACCESSORIZE YOUR REEL :: PG 50

- Mounting Brackets
- Assorted Reel Accessories

- Hoses



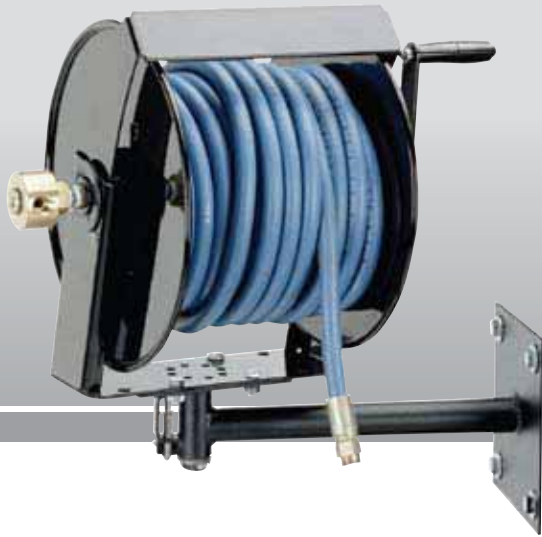

**COXREELS® SM Series “Swivel Mount” hand crank hose reels swivel on demand in the direction your work takes you and locks in eight different positions as desired.** Like the 100 Series, the SM Series is lightweight, compact and versatile with a working pressure up to 4,000 PSI. The “U” shaped base and hose control bar together add strength and rigidity while keeping the hose from slipping off the side discs. Add the SMK-202 wall mount bracket for swiveling mounted positions.


### SM SERIES MODELS

LESS HOSE									SIZE INDEX
MODEL	STANDARD CAPACITY			OPTIONAL CAPACITY Reducer Required			PSI	APRX LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.			
SM12-3-100	3/8"	5/8"	100	1/4"	1/2"	150	4,000	15	
SM17-3-250	3/8"	5/8"	250	1/4"	1/2"	350	4,000	26	
SM17-4-125	1/2"	7/8"	125	3/8"	3/4"	150	4,000	26	

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	M	N	Ø	Dw
<b>1</b>	19"	13 1/2"	12"	10 1/4"	4"	7"	3"	5 1/2"	8"
<b>2</b>	19"	18 1/2"	17"	10 1/4"	4"	7"	3"	5 1/2"	8"
<b>3</b>	19"	18 1/2"	17"	10 1/4"	4"	7"	3"	5 1/2"	8"

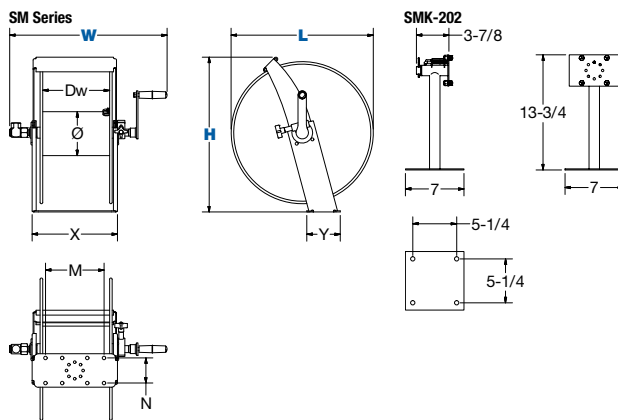

### SM SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Up to 4,000 PSI working pressure
- Swivel Seals: VITON®

#### DESIGN & STRUCTURE

- Professional grade, swivel mount hand crank reel
- Forward-weighted design ensures rotation in direction of use
- Solid one piece, heavy gauge steel frame
- Unique hose control bar keeps hose from slipping off the disc from any direction
- Optional 8-position swivel mount wall mount bracket with lock pin
- Adjustable tension brake to prevent “free-wheeling” during operation, transport or storage
- Garden hose kit available, see accessories

#### RETRACTION

- Direct hand crank rewind

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Water Supply
- Washdown
- Pressure Washing
- Agricultural Spraying
- Chemical Fluid Transfer
- Industrial Facilities Maintenance
- Ground Maintenance
- Farming
- Construction Sites
- General Landscape /Turf Care
- Home Gardening


### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Assorted Reel Accessories

- Hoses



### COXREELS® ACCESSORY



**Mounting Bracket** - Sold separately  
Pivoting base for wall mounting only. Heavy gauge steel construction, powder coated crinkle black. Includes rigid arm with 8-position locking pivot base.  
Weight: 8 lbs. **#SMK-202**



# COMPACT HAND CRANK HOSE, CORD OR CABLE STORAGE REELS **112Y SERIES**

**COXREELS® 112Y Series** hand crank hose reels are **lightweight, compact, versatile reels to store and maintain your hose or cord.** Save time and effort while increasing the safety of your work environment. The standard 112Y reels feature a sturdy "U" shaped frame and all steel construction make this one tough little reel. The 112Y-CM reels have a high quality one piece 1" steel tube frame structure. All listed models are supplied less hose or cord.

## 112Y SERIES MODELS

LESS HOSE									SIZE INDEX
MODEL	CABLE I.D.*				HOSE I.D.		PSI	APRX. LBS.	
	8/3	10/3	12/3	16/3	3/8"	1/2"			
112Y-4	40	75	150	300	50	30	4,000	10	1
112Y-8	80	135	300	*	100	55	4,000	14	2
112Y-12	150	225	*	*	150	75	4,000	20	3

\*Cable length based on SJ cord type

## 112Y-CM SERIES MODELS - CADDY MOUNT

LESS HOSE									SIZE INDEX
MODEL	CABLE I.D.*				HOSE I.D.		PSI	APRX. LBS.	
	8/3	10/3	12/3	16/3	3/8"	1/2"			
112Y-8-CM	80	135	300	*	100	55	4,000	13	4
112Y-12-CM	150	225	*	*	150	75	4,000	19	5

\*Cable length based on SJ cord type

## REEL DIMENSIONS Technical Data Sheets Available On Website


SIZE INDEX	W	H	L	X	Y	M	N	Ø	Dw
<b>1</b>	12 1/4"	13 1/8"	12"	6"	6"	4"	3"	5 1/2"	4 1/2"
<b>2</b>	15 3/4"	13 1/8"	12"	9 1/2"	6"	5 1/2"	3"	5 1/2"	8"
<b>3</b>	20 1/4"	13 1/8"	12"	14"	6"	10"	3"	5 1/2"	12 1/2"
<b>4</b>	16 3/8"	14 3/4"	13"	11 1/2"	10 5/8"	10 1/2"	5 1/4"	5 1/2"	8"
<b>5</b>	20 7/8"	14 3/4"	13"	16"	10 5/8"	15"	5 1/4"	5 1/2"	12 1/2"

Overall Dimensions

Base

Mounting Pattern

Drum

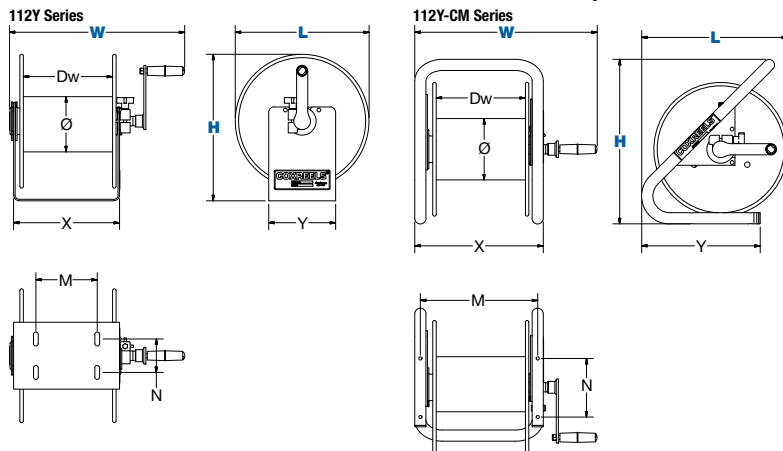

**COXREELS® FEATURE**

The access port & open drum allow for quick & easy use of hose cord or cable

The open drum & access port lets the hose/cord/cable quickly & easily pass thru to the center of the drum where it can be quickly wrapped up for easy storage.

Easily adjustable length of storage lead



112Y-CM Series

112Y Series

## 112Y SERIES :: REEL SPECIFICATIONS

### OPEN PORT

- Professional grade, compact & lightweight hand crank reels to store & maintain hose, cord, cable, wire, rope, tape, chain & more.
- Open drum design for no hassle hose wrap
- Open port for easy pass through for any type of hose, cord or cable
- Hose, cord or cable not included.

### DESIGN & STRUCTURE

- Solid one piece 10GA steel "U" shaped frame
- Base has holes for temporary or permanent installation
- Adjustable tension brake to prevent "free-wheeling" during operation, transport or storage
- (On 112Y-CM only) Control bar prevents hose, cord or cable from slipping off the discs
- (On 112Y-CM only) High quality one piece 1" steel tube frame structure
- (On 112Y-CM only) "Caddy Mount" offers convenient portability

### RETRACTION

- Direct hand crank rewind

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Hose, Cord & Cable Storage
- Mobile or Stationary Units
- Residential/Commercial/Industrial Use

### ACCESSORIZE YOUR REEL :: pg 50

- O-Rings & Swivels
- Hoses
- Assorted Reel Accessories



# 1125 SERIES HAND CRANK & MOTOR DRIVEN HOSE REELS



1125-E Series with optional 4-way roller bracket

1125 Series

## 1125 SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet (On high pressure HP prefix models)
- Swivel Seals: AFLAS (On high pressure HP prefix models)

### DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

### RETRACTION

- Reliable direct gear drive on motor driven models providing quiet & smooth retraction - **NO CHAIN**
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Industrial Plant & Ground Maintenance
- Fire Suppression
- Farming
- Construction Sites
- Landscape
- Pest & Weed Control
- Golf Course Maintenance
- Air Compressor
- Washdown
- High-Flow Watering
- Hydro Seeding
- Pressure Washing
- Agricultural Spraying
- Chemical Fluid Transfer

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Stacking Brackets
- Hoses
- Assorted Reel Accessories



**COXREELS® 1125 Series hand crank and motorized hose reels have the features demanded by industry professionals.** The industry preferred design features a sturdy one piece all welded "A" frame base, low profile outlet riser and open drum slot design provides a non-crimping, flat smooth hose wrap.

## 1125 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

LESS HOSE												SIZE INDEX
MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	PSI	MODEL	HP PSI	APRX. LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.						
<b>1125-4-100</b>	1/2"	7/8"	100	3/8"	3/4"	140	1/2" F NPT	3,000	<b>HP1125-4-100</b>	5,000	36	<b>1</b>
<b>1125-4-200</b>	1/2"	7/8"	200	3/8"	3/4"	300	1/2" F NPT	3,000	<b>HP1125-4-200</b>	5,000	39	<b>2</b>
<b>1125-4-325</b>	1/2"	7/8"	325	3/8"	3/4"	450	1/2" F NPT	3,000	<b>HP1125-4-325</b>	5,000	48	<b>3</b>
<b>1125-4-450</b>	1/2"	7/8"	450	3/8"	3/4"	625	1/2" F NPT	3,000	<b>HP1125-4-450</b>	5,000	52	<b>4</b>
<b>1125-4-500</b>	1/2"	7/8"	500	3/8"	3/4"	700	1/2" F NPT	3,000	<b>HP1125-4-500</b>	5,000	58	<b>5</b>
<b>1125-5-50</b>	3/4"	1 1/4"	50	1/2"	7/8"	100	3/4" F NPT	3,000	<b>HP1125-5-50</b>	4,500	38	<b>6</b>
<b>1125-5-100</b>	3/4"	1 1/4"	100	1/2"	7/8"	200	3/4" F NPT	3,000	<b>HP1125-5-100</b>	4,500	42	<b>7</b>
<b>1125-5-175</b>	3/4"	1 1/4"	175	1/2"	7/8"	325	3/4" F NPT	3,000	<b>HP1125-5-175</b>	4,500	50	<b>8</b>
<b>1125-5-200</b>	3/4"	1 1/4"	200	1/2"	7/8"	450	3/4" F NPT	3,000	<b>HP1125-5-200</b>	4,500	55	<b>9</b>
<b>1125-5-250</b>	3/4"	1 1/4"	250	1/2"	7/8"	500	3/4" F NPT	3,000	<b>HP1125-5-250</b>	4,500	59	<b>10</b>
<b>1125-6-35</b>	1"	1 7/16"	35	3/4"	1 1/4"	50	1" F NPT	3,000	-	-	50	<b>11</b>
<b>1125-6-50</b>	1"	1 7/16"	50	3/4"	1 1/4"	75	1" F NPT	3,000	-	-	55	<b>12</b>
<b>1125-6-75</b>	1"	1 7/16"	75	3/4"	1 1/4"	120	1" F NPT	3,000	-	-	62	<b>13</b>
<b>1125-6-100</b>	1"	1 7/16"	100	3/4"	1 1/4"	150	1" F NPT	3,000	-	-	69	<b>14</b>

### MOTOR OPTIONS

When ordering, suffix the model number with selection below. NOTE: Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APPR. LBS*
A	AIR - #4 GAST	COMP. AIR MOTOR	8
AB	AIR - #6 GAST	COMP. AIR MOTOR	8
E	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
EF	ELEC. - 24V DC	1/3 HP REW. REV. TYPE	13
EB	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
ED	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
EA	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	26
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
C*	FRONT HAND CRANK	BEVEL GEARED CRANK	3

\*Not available on 1" models, please refer to the 1175 series on the next page

### REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W			H		L	X	Y		Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.			CRANK	ELEC.		
1	19 1/2"	19 3/4"	17"	18 3/4"	19 1/4"	17 5/8"	11 3/8"	15 3/8"	16"	6 1/4"	6"
2	25 1/2"	25 3/4"	23"	18 3/4"	19 1/4"	17 5/8"	17 3/8"	15 3/8"	16"	6 1/4"	12"
3	31 1/2"	31 3/4"	29"	18 3/4"	19 1/4"	17 5/8"	23 3/8"	15 3/8"	16"	6 1/4"	18"
4	37 1/2"	37 3/4"	35"	18 3/4"	19 1/4"	17 5/8"	29 3/8"	15 3/8"	16"	6 1/4"	24"
5	41 1/2"	41 3/4"	39"	18 3/4"	19 1/4"	17 5/8"	33 3/8"	15 3/8"	16"	6 1/4"	28"
6	20 3/4"	20"	17 3/8"	18 3/4"	19 1/4"	17 5/8"	11 3/8"	15 3/8"	16"	6 1/4"	6"
7	26 3/4"	26"	23 3/8"	18 3/4"	19 1/4"	17 5/8"	17 3/8"	15 3/8"	16"	6 1/4"	12"
8	32 3/4"	32"	29 3/8"	18 3/4"	19 1/4"	17 5/8"	23 3/8"	15 3/8"	16"	6 1/4"	18"
9	38 3/4"	38"	35 3/8"	18 3/4"	19 1/4"	17 5/8"	29 3/8"	15 3/8"	16"	6 1/4"	24"
10	42 3/4"	42"	39 3/8"	18 3/4"	19 1/4"	17 5/8"	33 3/8"	15 3/8"	16"	6 1/4"	28"
11	26"	23 7/8"	22 1/4"	18 1/2"	19 1/8"	17 5/8"	14 7/8"	15 3/8"	16"	8 1/4"	9 1/2"
12	32"	29 7/8"	28 1/4"	18 1/2"	19 1/8"	17 5/8"	20 7/8"	15 3/8"	16"	8 1/4"	15 1/2"
13	38 1/2"	36 3/8"	34 3/4"	18 1/2"	19 1/8"	17 5/8"	27 3/8"	15 3/8"	16"	8 1/4"	22"
14	44 1/2"	42 3/8"	40 3/4"	18 1/2"	19 1/8"	17 5/8"	33 3/8"	15 3/8"	16"	8 1/4"	28"

Overall Dimensions

Base

Drum

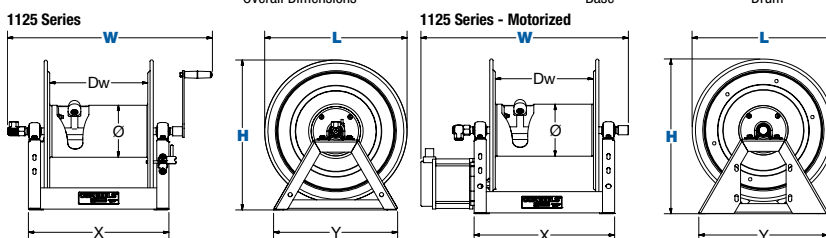

**COXREELS® 1175 Series "Competitor" hand crank and motorized hose reels, like the 1125 Series, is an industry preferred design built with a larger chassis for larger hose capacities and hose diameters. They feature a sturdy one piece all welded "A" frame base, low profile outlet riser opendrum slot design for smooth even hose wraps around the drum.**

## 1175 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL ASSEMBLY	OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D.	O.D.	FT.	I.D.	O.D.	FT.					
<b>1175-6-50</b>	1"	1 7/16"	50	3/4"	1 1/4"	100	1" F NPT 90°	1" F NPT	3,000	67	<b>1</b>
<b>1175-6-100</b>	1"	1 7/16"	100	3/4"	1 1/4"	150	1" F NPT 90°	1" F NPT	3,000	70	<b>2</b>
<b>1175-6-125</b>	1"	1 7/16"	125	3/4"	1 1/4"	200	1" F NPT 90°	1" F NPT	3,000	72	<b>3</b>
<b>1175-6-135</b>	1"	1 7/16"	135	3/4"	1 1/4"	175	1" F NPT 90°	1" F NPT	3,000	70	<b>6</b>
<b>1175-6-150</b>	1"	1 7/16"	150	3/4"	1 1/4"	250	1" F NPT 90°	1" F NPT	3,000	75	<b>4</b>
<b>1175-6-200</b>	1"	1 7/16"	200	3/4"	1 1/4"	300	1" F NPT 90°	1" F NPT	3,000	83	<b>5</b>

## MOTOR OPTIONS When ordering, suffix the model number with selection below. \*Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>AB</b>	AIR - #6 GAST	COMP. AIR MOTOR	8
<b>E</b>	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
<b>EF</b>	ELEC. - 24V DC	1/3 HP REW. REV. TYPE	13
<b>EB</b>	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
<b>C</b>	FRONT HAND CRANK	BEVEL GEARED CRANK	3

## REEL DIMENSIONS Technical Data Sheets Available On Website


SIZE INDEX	W			H		L	X	Y	Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.					
1	24⅞"	22"	20½"	26⅞"	26⅞"	24"	13"	20⅞"	10½"	7½"
2	28⅞"	26"	24½"	26⅞"	26⅞"	24"	17"	20⅞"	10½"	11½"
3	30⅞"	28"	26½"	26⅞"	26⅞"	24"	19"	20⅞"	10½"	13½"
4	32⅞"	30"	28½"	26⅞"	26⅞"	24"	21"	20⅞"	10½"	15½"
5	36⅝"	34½"	33"	26⅞"	26⅞"	24"	25½"	20⅞"	10½"	20"
6	36⅝"	34½"	33"	22"	22⅞"	20"	25½"	18⅞"	10½"	20"
	Overall Dimensions						Base		Drum	

Overall Dimensions


Base

Drum



1175 Series



1175 Series - Motorized



1175 Series - Motorized



## MOBILIZE YOUR REEL Complete accessory info on page 53

### COXREELS® ACCESSORY FOR 1125, 1175 & 1185 SERIES

	<b>PORTABLE HOSE REEL CART</b> <ul style="list-style-type: none"> <li>Steel round handle detaches for compact storage</li> <li>Steel front legs with rubber feet prevent sliding</li> <li>High grade ball bearings with hardened cup</li> <li>1/2" diameter steel axle</li> <li>Solid 8" rubber tires</li> <li>See page 53 for complete list</li> </ul>		<b>CARRY HANDLES</b> <ul style="list-style-type: none"> <li>Easily bolts to "a" frame making the reel portable</li> <li>1" tube steel construction</li> <li>Powder coated crinkle black</li> <li>See page 53 for complete list</li> </ul>



1175-E Series with optional 4-way roller bracket

1175 Series

## 1175 SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS

### DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

### RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Water Trucks
- Construction Sites
- Fire Suppression
- Chemical Fluid Transfer
- Lubricant Dispensing
- Farming
- High-Flow Watering
- Chemical Fluid Transfer

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories





# 1185 SERIES LARGE CAPACITY/VOLUME HOSE REELS



**COXREELS® 1185 Series** hand crank and motor driven hose reels are designed to handle long lengths of large diameter hose for increased volume delivery. Coxreels' exclusive low profile outlet riser and open drum design provide a noncrimping, flat smooth hose wrap. The sturdy all welded "A" frame base provides exceptional strength to handle the extra weight without sacrificing performance, even in demanding mobile applications.

## 1185 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
1185-1124	1½"	2¼"	50	1¼"	1⅜"	75	1½" F NPT	600	76	1
1185-1524	1½"	2¼"	75	1¼"	1⅜"	100	1½" F NPT	600	81	2
1185-2020	1½"	2¼"	70	1¼"	1⅜"	80	1½" F NPT	600	70	3
1185-2024	1½"	2¼"	100	1¼"	1⅜"	125	1½" F NPT	600	94	4
1185-2028	1½"	2¼"	125	1¼"	1⅜"	180	1½" F NPT	600	109	5
1185-2528	1½"	2¼"	150	1¼"	1⅜"	220	1½" F NPT	600	122	6
1185-3324	1½"	2¼"	175	1¼"	1⅜"	225	1½" F NPT	600	154	7
1185-3328	1½"	2¼"	250	1¼"	1⅜"	325	1½" F NPT	600	169	8

## 1185 SERIES MODELS WITH 90° SWIVEL & 3000 PSI - ALL REELS SUPPLIED LESS HOSE


MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
1185-1124-BUXX	1½"	2¼"	50	1¼"	1⅜"	75	1½" F NPT	3,000	76	1
1185-1524-BUXX	1½"	2¼"	75	1¼"	1⅜"	100	1½" F NPT	3,000	81	2
1185-2020-BUXX	1½"	2¼"	70	1¼"	1⅜"	80	1½" F NPT	3,000	70	3
1185-2024-BUXX	1½"	2¼"	100	1¼"	1⅜"	125	1½" F NPT	3,000	94	4
1185-2028-BUXX	1½"	2¼"	125	1¼"	1⅜"	180	1½" F NPT	3,000	109	5
1185-2528-BUXX	1½"	2¼"	150	1¼"	1⅜"	220	1½" F NPT	3,000	122	6
1185-3324-BUXX	1½"	2¼"	175	1¼"	1⅜"	225	1½" F NPT	3,000	154	7
1185-3328-BUXX	1½"	2¼"	250	1¼"	1⅜"	325	1½" F NPT	3,000	169	8

## MOTOR OPTIONS When ordering, suffix the model number with selection below. NOTE: Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
A	AIR - #4 GAST	COMP. AIR MOTOR	8
AB	AIR - #6 GAST	COMP. AIR MOTOR	8
E	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
EF	ELEC. - 24V DC	1/3 HP REW. REV. TYPE	13
EB	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
ED	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
EA	ELEC. - EXPL. PRF. - 115V	1/2 HP REW. AC REV. TYPE	26
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
C	FRONT HAND CRANK	BEVEL GEARED CRANK	3

## REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W				H	L	X	Y	Ø	Dw
	CRANK	ELEC.	AIR / HYD.	-BUXX EQUIPPED						
1	25"	26⅛"	23⅜"	26⅞"	26"	24"	17"	22¼"	10½"	11½"
2	29"	30⅞"	27⅜"	30⅞"	26"	24"	21"	22¼"	10½"	15½"
3	33½"	34⅝"	31⅞"	35⅜"	21⅝"	20"	25½"	19⅝"	10½"	11½"
4	33½"	34⅝"	31⅞"	35⅜"	26"	24"	25½"	22¼"	10½"	20"
5	33½"	34⅝"	31⅞"	35⅜"	30"	28"	25½"	24½"	10½"	20"
6	38½"	39⅝"	36⅞"	40⅝"	30"	28"	30½"	24½"	10½"	25"
7	46½"	47⅝"	44⅞"	48⅝"	26"	24"	38½"	22¼"	10½"	33"
8	46½"	47⅝"	44⅞"	48⅝"	30"	28"	38½"	24½"	10½"	33"

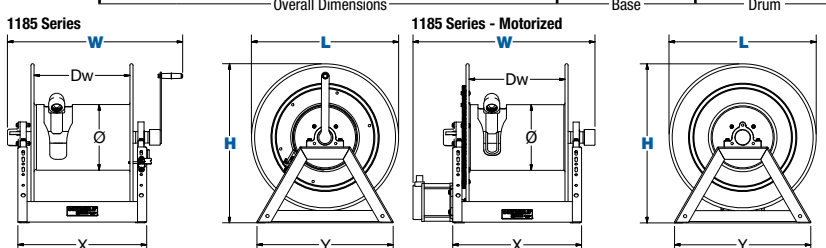

## 1185 SERIES :: REEL SPECIFICATIONS

### SWIVEL

- External fluid path with in-line aluminum straight, full flow NPT swivel inlet
- Swivel Seals: NITRILE
- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet  
(On high pressure models with suffix -BUXX)
- Swivel Seals: AFLAS  
(On high pressure models with suffix -BUXX)

### DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Robust lubricated horizontal surface mount bearings for easy rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

### RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

## SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- High Volume Delivery
- Bulk Liquid Handling
- Water Trucks
- Mining Operations
- Construction Sites
- Farming
- Chemical Fluid Transfer
- Aviation Refueling
- Fuel Trucks

## ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Rolling Brackets
- Hoses
- Assorted Reel Accessories



**COXREELS® 1195 Series** motor driven hose reels are designed to handle long lengths of large diameter hose for increased volume delivery. Coxreels' exclusive low profile outlet riser and open drum design provide a noncrimping, flat smooth hose wrap. The sturdy all welded "A" frame base provides exceptional strength to handle the extra weight without sacrificing performance, even in demanding mobile applications.

## 1195 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL ASSEMBLY	OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D.	O.D.	FT.	I.D.	O.D.	FT.					
<b>1195-932-X</b>	2"	29/16"	50	1 1/2"	2 1/16"	60	2" F NPT	2" F NPT	600	128	<b>1</b>
<b>1195-1332-X</b>	2"	29/16"	75	1 1/2"	2 1/16"	100	2" F NPT	2" F NPT	600	148	<b>3</b>
<b>1195-2032-X</b>	2"	29/16"	115	1 1/2"	2 1/16"	150	2" F NPT	2" F NPT	600	186	<b>5</b>
<b>1195-1728-X</b>	2"	29/16"	60	1 1/2"	2 1/16"	85	2" F NPT	2" F NPT	600	134	<b>2</b>
<b>1195-2428-X</b>	2"	29/16"	90	1 1/2"	2 1/16"	135	2" F NPT	2" F NPT	600	169	<b>4</b>
<b>1195-3228-X</b>	2"	29/16"	125	1 1/2"	2 1/16"	175	2" F NPT	2" F NPT	600	218	<b>6</b>

### - SUFFIX "X" OPTIONS

These models are not available in direct hand crank models.  
When ordering, substitute the "X" with selection below. Add 5 lbs to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>AB</b>	AIR - #6 GAST	COMP. AIR MOTOR	8
<b>EB</b>	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
<b>C</b>	FRONT HAND CRANK	BEVEL GEARED CRANK	3

### REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
<b>1</b>	22 3/4"	33 1/4"	32"	15"	25 5/8"	15 1/2"	9 1/2"
<b>2</b>	33 1/4"	30 1/4"	28"	25 1/2"	24 1/2"	15 1/2"	17 1/2"
<b>3</b>	26 3/4"	33 1/4"	32"	19"	25 5/8"	15 1/2"	13 1/2"
<b>4</b>	37 1/4"	30 1/4"	28"	29 1/2"	24 1/2"	15 1/2"	24"
<b>5</b>	30 3/4"	33 1/4"	32"	23"	25 5/8"	15 1/2"	20"
<b>6</b>	45 1/4"	30 1/4"	28"	37 1/2"	24 1/2"	15 1/2"	32"

Overall Dimensions

Base

Drum

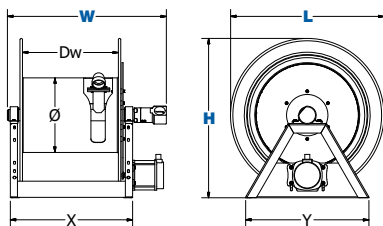

### 1195 SERIES :: REEL SPECIFICATIONS

#### SWIVEL

- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®

#### DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Robust lubricated horizontal surface mount bearings for easy rotation
- Adaptor for Victaulic connections available, consult factory
- Adjustable tension brake to prevent "free-wheeling" during operation

#### RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Bevel geared crank rewind (On models with suffix -C)  
See Motor Options Chart

#### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

#### POSSIBLE FIELDS OF APPLICATION

- High Volume Delivery
- Bulk Liquid Handling
- Water Trucks
- Mining Operations
- Construction Sites
- Farming
- Chemical Fluid Transfer
- Aviation Refueling
- Fuel Trucks

#### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

# 1275 SERIES LARGE CAPACITY DUAL HOSE REELS



1275-E Series

## 1275 SERIES :: REEL SPECIFICATIONS

### SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets (one on each side of the reel)
- Swivel Seals: NITRILE
- Swivel O-ring seals supported by Teflon spacers
- Electroless nickel plated steel swivel on 1" models

### DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Two low profile outlet risers & open drum slot design for dual hose applications
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation

### RETRACTION

- Reliable direct gear drive on motor driven models - **NO CHAIN**
- Bevel gear hand crank with removable handle for compact storage
- See Motor Options Chart

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Twin Agent Applications
- Fire Suppression
- Offshore Oil Rigs
- Shipyard & Port Operations
- Hydraulic
- Mining Operations
- Aircraft Maintenance
- Petroleum Production Fields

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

**COXREELS® 1275 Series "Dual Hose" hand crank or motorized hose reels are designed for large capacity applications.** This series features dual plumbing with two swivel inlets and two low profile outlets that compliment the open drum slot and provide a non-crimping, flat smooth hose wrap. The industry preferred one piece all welded "A" frame design adds rigidity and strength while the positive gear drive rewind assures consistent trouble-free performance.

## 1275 SERIES MODELS

MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
<b>1275-4-50-X</b>	1/2"	7/8"	2/50	3/8"	3/4"	2/70	1/2" F NPT	3,000	40	<b>1</b>
<b>1275-4-100-X</b>	1/2"	7/8"	2/100	3/8"	3/4"	2/140	1/2" F NPT	3,000	42	<b>2</b>
<b>1275-4-150-X</b>	1/2"	7/8"	2/150	3/8"	3/4"	2/200	1/2" F NPT	3,000	47	<b>3</b>
<b>1275-4-200-X</b>	1/2"	7/8"	2/200	3/8"	3/4"	2/300	1/2" F NPT	3,000	56	<b>4</b>
<b>1275-6-50-X</b>	1"	17/16"	2/50	3/4"	1 1/4"	2/60	1" F NPT	3,000	63	<b>5</b>
<b>1275-6-75-X</b>	1"	17/16"	2/75	3/4"	1 1/4"	2/110	1" F NPT	3,000	68	<b>6</b>
<b>1275-6-100-X</b>	1"	17/16"	2/100	3/4"	1 1/4"	2/155	1" F NPT	3,000	74	<b>7</b>
<b>1275-6-150-X</b>	1"	17/16"	2/150	3/4"	1 1/4"	2/200	1" F NPT	3,000	88	<b>8</b>

### - SUFFIX "X" OPTIONS


When ordering, substitute the "X" with selection below. Add 5 lbs to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>E</b>	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
<b>EF</b>	ELEC. - 24V DC	1/3 HP REW. REV. TYPE	13
<b>EB</b>	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
<b>C</b>	FRONT HAND CRANK	BEVEL GEARED CRANK	3

### REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W			H		L	X	Y		Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.			CRANK	ELEC.		
<b>1</b>	18 7/8"	22 5/8"	19 7/8"	18 5/8"	19 1/8"	17 5/8"	13 3/8"	15 3/8"	16"	6 1/4"	8"
<b>2</b>	22 7/8"	26 5/8"	23 7/8"	18 5/8"	19 1/8"	17 5/8"	17 3/8"	15 3/8"	16"	6 1/4"	12"
<b>3</b>	28 7/8"	32 5/8"	29 7/8"	18 5/8"	19 1/8"	17 5/8"	23 3/8"	15 3/8"	16"	6 1/4"	18"
<b>4</b>	34 7/8"	38 5/8"	35 7/8"	18 5/8"	19 1/8"	17 5/8"	29 3/8"	15 3/8"	16"	6 1/4"	24"
<b>5</b>	-	30 5/8"	27 3/4"	22 7/8"	22 7/8"	20"	19"	18 7/8"	18 7/8"	10 1/2"	13 1/2"
<b>6</b>	-	30 5/8"	27 3/4"	26 1/8"	26 1/8"	24"	19"	20 3/8"	20 3/8"	10 1/2"	13 1/2"
<b>7</b>	-	37"	34 1/4"	26 1/8"	26 1/8"	24"	25 1/2"	20 3/8"	20 3/8"	10 1/2"	20"
<b>8</b>	-	37"	34 1/4"	30 1/16"	30 1/16"	28"	25 1/2"	22 9/16"	22 9/16"	10 1/2"	20"

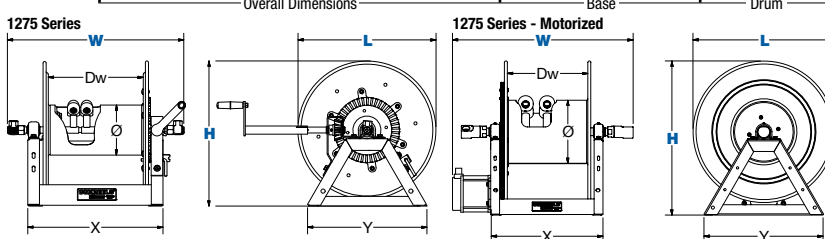



**COXREELS® 100W Series “Welding” hand crank hose reels are lightweight, compact and versatile.** Save time and effort while increasing the safety of your work environment. The sturdy “U” shaped frame and all steel construction make this one tough little reel. All listed models are supplied less hose.

## 100W SERIES MODELS - Oxy-Acetylene welding hose with 9/16" – 18 UNF welding hose fittings

HOSE					LESS HOSE		SIZE INDEX
MODEL	I.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>112W-1-50</b>	1/4"	50	200	28	<b>112WL-1-50</b>	18	<b>1</b>
<b>112W-1-100</b>	1/4"	100	200	37	<b>112WL-1-100</b>	18	<b>2</b>
<b>117W-1-200</b>	1/4"	200	200	68	<b>117WL-1-200</b>	30	<b>3</b>

## 100WT SERIES MODELS - T Grade welding hose with 9/16" – 18 UNF welding hose fittings

HOSE					LESS HOSE		SIZE INDEX
MODEL	I.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>112WT-1-50</b>	1/4"	50	200	28	<b>112WTL-1-50</b>	18	<b>1</b>
<b>112WT-1-100</b>	1/4"	100	200	37	<b>112WTL-1-100</b>	18	<b>2</b>
<b>117WT-1-200</b>	1/4"	200	200	68	<b>117WTL-1-200</b>	30	<b>3</b>

**COXREELS® 1275W Series hand crank or motorized “Welding” hose reels are built to manage long lengths of bulky twin line welding hose.** The direct bevel gear drive, low profile outlet riser and open drum slot design are features greatly appreciated by the regular user. Dual brass swivel inlets on each side of the reel assure full flow trouble free performance.

## 1275W SERIES MODELS - Oxy-Acetylene welding hose with 9/16" – 18 UNF welding hose fittings

HOSE						LESS HOSE		SIZE INDEX
MODEL	GAS	I.D.	FT.	PSI	APRX. LBS.	MODEL	APRX. LBS.	
<b>1275W-3-100-X</b>	Oxy/Act	3/8"	100	200	73	<b>1275WL-3-100-X</b>	45	<b>4</b>
<b>1275W-3-150-X</b>	Oxy/Act	3/8"	150	200	90	<b>1275WL-3-150-X</b>	48	<b>5</b>
<b>1275W-3-250-X</b>	Oxy/Act	3/8"	250	200	126	<b>1275WL-3-250-X</b>	56	<b>6</b>
-	Oxy/Act	3/8"	350	200	-	<b>1275WL-3-350-X</b>	64	<b>7</b>
<b>1275WT-3-100-X</b>	T Grade	3/8"	100	200	73	<b>1275WTL-3-100-X</b>	45	<b>4</b>
<b>1275WT-3-150-X</b>	T Grade	3/8"	150	200	90	<b>1275WTL-3-150-X</b>	48	<b>5</b>
<b>1275WT-3-250-X</b>	T Grade	3/8"	250	200	126	<b>1275WTL-3-250-X</b>	56	<b>6</b>

## - SUFFIX “X” OPTIONS

When ordering, substitute the “X” with selection below. Add 5 lbs to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
<b>C</b>	FRONT HAND CRANK	BEVEL GEARED CRANK	3

## REEL DIMENSIONS Technical Data Sheets Available On Website


SIZE INDEX	W		H		L	X	Y		Ø	Dw
	CRANK	ELEC.	CRANK	ELEC.			CRANK	ELEC.		
<b>1</b>	15 1/4"	-	13"	-	12"	6"	6"	-	5 1/2"	4 1/2"
<b>2</b>	18 3/4"	-	13"	-	12"	9 1/2"	6"	-	5 1/2"	8"
<b>3</b>	18 1/4"	-	18"	-	17"	9 1/2"	6"	-	5 1/2"	8"
<b>4</b>	18 7/8"	19 7/8"	18 5/8"	19 1/8"	17 5/8"	13 3/8"	15 3/8"	16"	6 1/4"	8"
<b>5</b>	22 7/8"	23 7/8"	18 5/8"	19 1/8"	17 5/8"	17 3/8"	15 3/8"	16"	6 1/4"	12"
<b>6</b>	28 7/8"	29 7/8"	18 5/8"	19 1/8"	17 5/8"	23 3/8"	15 3/8"	16"	6 1/4"	18"
<b>7</b>	34 7/8"	35 7/8"	18 5/8"	19 1/8"	17 5/8"	29 3/8"	15 3/8"	16"	6 1/4"	24"

Overall Dimensions


Base

Drum


100W Series



1275W Series

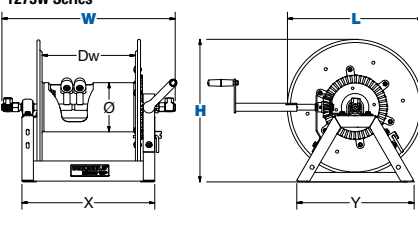

1275W Series with optional 4-way roller bracket & bevel hand crank

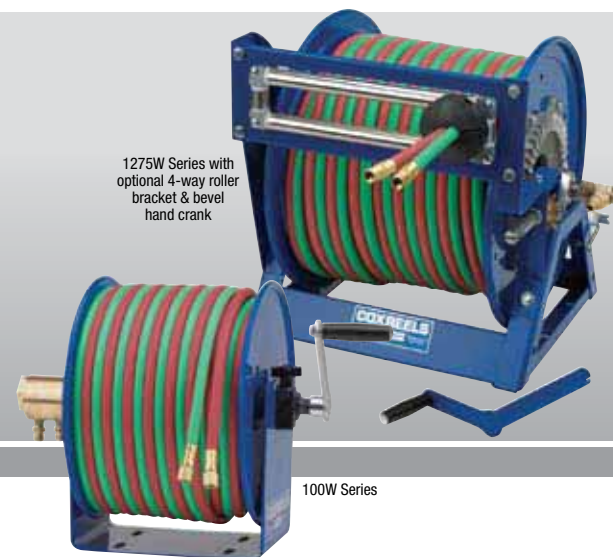

100W Series

## 100W & 1275W SERIES :: REEL SPECIFICATIONS

### 100W SWIVEL

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Swivel seals: VITON®

### 100W DESIGN & STRUCTURE

- Compact solid one piece, heavy gauge steel “U” shaped frame with open drum design
- Composite bearing for smooth rotation
- Adjustable tension brake to prevent “free-wheeling” during operation, transport or storage
- 9/16” – 18 UNF welding hose fittings

### 100W RETRACTION

- Direct hand crank rewind

### 1275W SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow 3/8” NPT swivel inlets (1 on each side of the reel)
- Swivel Seal: VITON®

### 1275W DESIGN & STRUCTURE

- All welded steel “A” frame construction for superior reel structure
- Exclusive low profile outlet risers & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation

### 1275W RETRACTION

- Choice of motor or bevel gear hand crank

## SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Welding / Service Trucks
- Welding Shops
- Automotive & Fleet Maintenance
- Garage Settings
- Pipelines
- Mining, Construction & Railroad Operations
- Marine/Ship Building/Offshore

## ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

# 100WCL & 1125WCL SERIES HAND CRANK & MOTORIZED WELDING REELS



**COXREELS® 100WCL Series** compact hand crank hose reels are versatile and ideal for electrode and grounding lead applications. Save time and effort while increasing the safety of your work environment. The sturdy "U" shaped frame and all steel construction make this one tough little reel. All listed models are supplied less cable.

## 100WCL SERIES

LESS CABLE				SIZE INDEX
MODEL	GAUGE	FT	APRX. LBS.	
<b>112WCL-6-20</b>	#2/0	100	19	<b>1</b>
<b>112WCL-6-10</b>	#1/0	100	19	<b>1</b>
<b>112WCL-6-01</b>	#1	150	19	<b>1</b>
<b>112WCL-6-02</b>	#2	165	19	<b>1</b>

**COXREELS® 1125WCL Series** hand crank or motorized "Welding Cable" reels are great for grounding cable. Save time and effort as you extend the life of your expensive welding cable investment. All electrical components are set inside the drum offering a special narrow width. A stacking bracket is available to create a lead/ground combination in one organized unit.

## 1125WCL SERIES

LESS CABLE						SIZE INDEX
MODEL	CABLE TYPE & CAPACITY				APPR. LBS.	
	#2	#1	#1/0	#2/0		
1125WCL-6-X	300 ft	250 ft	200 ft	150 ft	38	2
1125WCL-12-X	600 ft	500 ft	400 ft	300 ft	45	3

### - SUFFIX "X" OPTIONS

When ordering, substitute the "X" with selection below. Add 5 lbs to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>EB</b>	ELEC. - 24V DC	1/2 HP REV. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REV. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF. - 115V	1/2 HP REV., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
<b>C</b>	DIRECT HAND CRANK	STANDARD HAND CRANK	0

## REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W			H		L	X	Y		Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.			CRANK	ELEC.		
<b>1</b>	18"	-	-	13"	-	12"	8"	6"	-	5-1/2"	6-1/2"
<b>2</b>	18 3/4"	19 7/8"	17 1/4"	18 1/2"	19 1/8"	17 1/2"	11 3/8"	15 3/8"	16"	8-1/2"	6"
<b>3</b>	24 3/4"	25 7/8"	23 1/4"	18 1/2"	19 1/8"	17 1/2"	17 3/8"	15 3/8"	16"	8-1/2"	12"

Overall Dimensions

Base

Drum

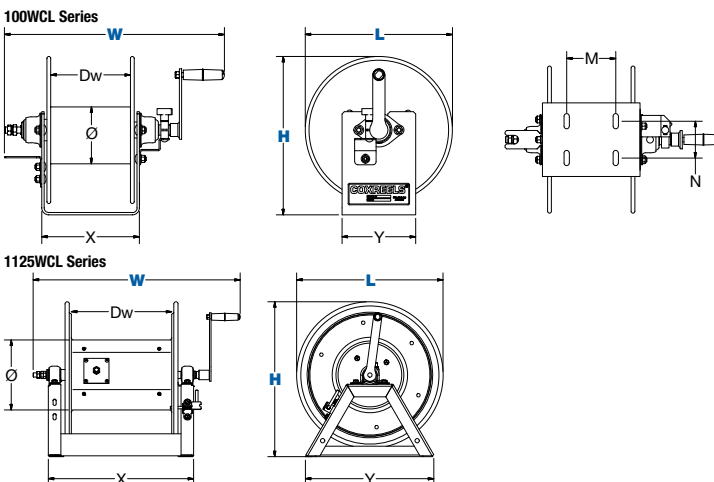

## 100WCL & 1125WCL SERIES :: REEL SPECIFICATIONS

### 100WCL & 1125WCL SLIP-RING

- Drum-located slip ring assembly for simple routine maintenance
- Electrical current runs through a 450 AMP rated slip ring

### 100WCL DESIGN & STRUCTURE

- Solid one piece, heavy gauge steel "U" shaped frame with open drum design
- Bronze self-lubricated spherical bearings at each end designed for heavy duty applications
- Adjustable tension brake to prevent "free-wheeling" during operation, transport or storage

### 100WCL RETRACTION

- Direct hand crank rewind

### 1125WCL DESIGN & STRUCTURE

- Designed for electrode & grounding lead applications
- All welded steel "A" frame construction for superior reel structure
- Narrow width for convenient installation in restricted spaces
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

### 1125WCL RETRACTION

- Reliable direct gear drive on motor driven models
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

## SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- Manufacturing Plants
- Maintenance, Repair & Operations
- Welding / Service Trucks
- Welding Shops
- Pipelines
- Mining, Construction & Railroad Operations
- Marine/Ship Building/ Offshore

## ACCESSORIZE YOUR REEL :: PG 50

- Stacking Brackets
- Assorted Reel Accessories
- Roller Bracket

**COXREELS® 1125PCL Series** professional-grade hand crank and motorized cord reels feature the industry preferred design including a drum-located, easy to access slip ring assembly for simple routine maintenance and a sturdy all-welded “A” frame built to efficiently handle the most demanding of tasks. The unique permanently lubricated and self-aligning pillow block bearings at each end of the drum allow smooth rotation and are specifically designed for rough, heavy-duty applications. These innovative models handle long length of 12/3 Gage or 10/3 Gage S0 type power cord.

## 1125PCL SERIES MODELS

MODEL	LESS CORD					SIZE INDEX
	12/3 S0	10/3 S0	VOLTS	AMPS	APRX. LBS.	
<b>1125PCL-8-X</b>	250'	200'	600	30	35	<b>1</b>
<b>1125PCL-8M-X</b>	250'	200'	600	45	35	<b>1</b>

## - SUFFIX “X” OPTIONS

When ordering, substitute the “X” with selection below. Add 5 lbs to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>E</b>	ELEC. - 12V DC	1/3 HP REV. REV. TYPE	13
<b>EF</b>	ELEC. - 24V DC	1/3 HP REV. REV. TYPE	13
<b>EB</b>	ELEC. - 24V DC	1/2 HP REV. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REV. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF.	115V 1/2 HP REV., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
<b>C</b>	DIRECT HAND CRANK	STANDARD HAND CRANK	3

## REEL DIMENSIONS

Technical Data Sheets Available On Website


SIZE INDEX	W			H		L	X	Y		Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.			CRANK	ELEC.		
<b>1</b>	21½"	21½"	18⅞"	18½"	19⅞"	17½"	13⅜"	15¼"	16"	8½"	8"

Overall Dimensions


Base

Drum

1125PCL Series

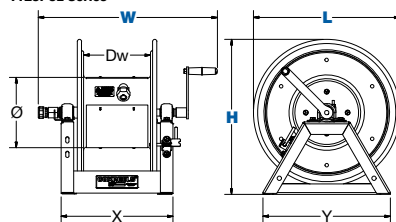

1125PCL Series - Motorized

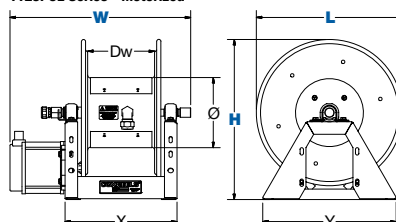

## COXREELS® 1125PCL FEATURES



### All Internal Components

- Drum-located slip ring assembly with easy access covers for simple routine maintenance.



## 1125PCL SERIES :: REEL SPECIFICATIONS

### SLIP RING

- Drum-located slip ring assembly with easy to access cover for simple routine maintenance
- Available with 30 Amps or 45 Amps, 600 Volt rated slip ring assembly (see chart)

### DESIGN & STRUCTURE

- All welded steel “A” frame construction to strengthen the reel structure
- Narrow width for convenient installation in restricted spaces
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- “Cable Keeper” to prevent the lead cable from whipping or twisting
- Adjustable tension brake to prevent “free-wheeling” during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

### RETRACTION

- Reliable direct gear drive on motor driven models - NO CHAIN
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION


- Power Tools
- Light Source
- General Industrial
- Manufacturing Plants & Facilities
- Service / Mechanic / Utility Vehicles
- Mining, Construction & Railroad Operations

### ACCESSORIZE YOUR REEL :: PG 50

- Roller Brackets
- Assorted Reel Accessories
- Stacking Brackets



# SS 100, 1125 & 1175 SERIES STAINLESS STEEL HAND CRANK & MOTORIZED HOSE REELS

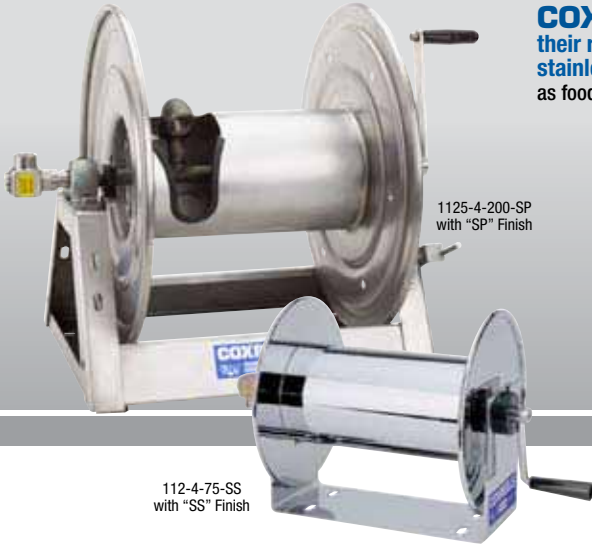

**COXREELS® SS Series** "Stainless Steel" hand crank hose reels have similar features to their related series, but are constructed of high quality electro-polished stainless steel with stainless steel fluid paths. They offer clean, non-corrosive performance in applications that require it, such as food and chemical processing, marinas, and anywhere that rust, corrosion and contamination thrive.

## SS 100 SERIES - Hand Crank

LESS HOSE						SIZE INDEX
MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	
<b>112-4-75-SS</b>	1/2"	7/8"	75	4000	21	<b>1</b>
<b>117-4-225-SS</b>	1/2"	7/8"	225	4000	31	<b>2</b>
<b>117-5-100-SS</b>	3/4"	1 1/4"	100	4000	36	<b>3</b>

SS100 Series is only available in SS finish

## SS 1125 SERIES - Hand Crank & Motor Driven

LESS HOSE										SIZE INDEX
MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	PSI	APRX. LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
<b>1125-4-100-X</b>	1½"	7⁄8"	100	3⁄8"	¾"	140	½" F NPT	3,000	36	
<b>1125-4-200-X</b>	1½"	7⁄8"	200	3⁄8"	¾"	300	½" F NPT	3,000	39	<b>5</b>
<b>1125-5-100-X</b>	¾"	1¼"	100	½"	7⁄8"	200	¾" F NPT	3,000	42	<b>6</b>
<b>1125-5-200-X</b>	¾"	1¼"	200	½"	7⁄8"	450	¾" F NPT	3,000	55	<b>7</b>

Designate either SP or SS for choice of finish

## SS 1175 SERIES - Hand Crank & Motor Driven

LESS HOSE										SIZE INDEX
MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL & OUTLET RISER	PSI	APRX. LBS.	
	I.D.	O.D.	FT.	I.D.	O.D.	FT.				
1175-6-100-X	1"	1 7/16"	100	3/4"	1 1/4"	150	1" F NPT	3,000	70	
1175-6-200-X	1"	1 7/16"	200	3/4"	1 1/4"	300	1" F NPT	3,000	83	9

Designate either SP or SS for choice of finish

## MOTOR OPTIONS

When ordering, suffix the model number with selection below. \*Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>E</b>	ELEC. - 12V DC	1/3 HP REV. REV. TYPE	13
<b>EB</b>	ELEC. - 24V DC	1/2 HP REV. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REV. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF.	115V 1/2 HP REV., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
<b>C</b>	FRONT HAND CRANK	BEVEL GEARED CRANK	3

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W			H		L	X	Y		Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.			CRANK	ELEC.		
<b>1</b>	22 3/4"	-	-	13"	-	12"	14"	6"	-	5 1/2"	12 1/2"
<b>2</b>	22 3/4"	-	-	18"	-	17"	14"	6"	-	5 1/2"	12 1/2"
<b>3</b>	23 1/4"	-	-	18"	-	17"	14"	6"	-	5 1/2"	12 1/2"
<b>4</b>	19 1/2"	19 3/4"	17"	18 3/4"	19 1/4"	17 5/8"	11 3/8"	15 3/8"	16"	6 1/4"	6"
<b>5</b>	25 1/2"	25 3/4"	23"	18 3/4"	19 1/4"	17 5/8"	17 3/8"	15 3/8"	16"	6 1/4"	12"
<b>6</b>	26 3/4"	26"	23 3/8"	18 3/4"	19 1/4"	17 5/8"	17 3/8"	15 3/8"	16"	6 1/4"	12"
<b>7</b>	38 3/4"	38"	35 3/8"	18 3/4"	19 1/4"	17 5/8"	29 3/8"	15 3/8"	16"	6 1/4"	24"
<b>8</b>	28 1/8"	26"	24 1/2"	26 1/8"	26 1/8"	24"	17"	20 1/8"	20 1/8"	10 1/2"	11 1/2"
<b>9</b>	36 5/8"	34 1/2"	33"	26 1/8"	26 1/8"	24"	25 1/2"	20 1/8"	20 1/8"	10 1/2"	20"





Overall Dimensions

Base

Drum

SS 100 Series

SS 1125 & 1175 Series



## SS SERIES - HAND CRANK/ MOTORIZED:: REEL SPECIFICATIONS

### SWIVEL

- Non-corrosive external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease

### DESIGN & STRUCTURE

- Choice of stainless steel finish includes:
  - **"-SP"** Standard unpolished "as manufactured" stainless steel finish
  - **"-SS"** Electro-polished stainless steel finish
- Each of these reels is built of their standard series with their own unique features & benefits

### RETRACTION

- See page 36 for 100 Series features
- See page 40 for 1125 Series features
- See page 41 for 1175 Series features

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Corrosive Environments
- Hygienic Environments
- Fire Suppression
- Medical Services
- Marine/Docks/Offshore
- Manufacturing Plants & Facilities
- Pulp & Paper Plants
- Food & Chemical Processing Plants
- Bottling Plants
- Dairies
- Meat Packing
- Grocery Stores
- Restaurants & Commercial Kitchens
- Water Treatment & Supply
- Petrochemical
- Food Grade Washdown

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Stacking Brackets
- Hoses
- Assorted Reel Accessories

**REELS TO MANAGE ALL  
THAT CAN BE WRAPPED**

# STORAGE REELS

**COXREELS®** Storage hand crank and motorized reels have the features demanded by industry professionals. These features include a CNC robotically heavy duty spun and ribbed discs with rolled edges for added strength, safety and durability and a sturdy all-welded "A" frame built to efficiently handle the most demanding storage tasks on either stationary or mobile units. These innovative models were selected from Coxreels standard series to handle long length of various materials including but not limited to hose, collapsible hose, power cord, cable, rope, wire, barbed wire, tape, and chain.

Not all storage reels are listed, please consult factory for more models.

## STORAGE MODELS - ALL REELS SUPPLIED LESS HOSE

LESS HOSE/CORD/CABLE									
MODEL		1125 SERIES				1175 SERIES		1185 SERIES	
		1125-4-200-BYXX	1125-4-325-BYXX	1125-5-200-BYXX	1125-5-250-BYXX	1175-6-100-BYXX	1175-6-200-BYXX	1185-2028-BYXX	1185-3328-BYXX
HOSE, ROPE, CABLE O.D.	1/4"	3,250'	4,875'	6,500'	7,600'	5,600'	9,750'	14,110'	23,250'
	3/8"	1,475'	2,225'	2,975'	3,450'	2,435'	4,305'	6,100'	10,135'
	1/2"	810'	1,215'	1,625'	1,900'	1,330'	2,310'	3,375'	5,575'
	5/8"	525'	775'	1,060'	1,225'	785'	1,400'	2,255'	3,665'
	3/4"	335'	500'	675'	775'	605'	1,055'	1,400'	2,375'
	7/8"	235'	360'	475'	575'	395'	670'	1,100'	1,865'
	1"	175'	265'	350'	410'	285'	515'	770'	1,275'
	1 1/4"	100'	165'	225'	260'	195'	350'	560'	915'
	1 1/2"	65'	100'	135'	150'	120'	220'	305'	515'
	1 3/4"	50'	90'	115'	140'	70'	135'	275'	450'
	2"	30'	50'	60'	75'	65'	125'	190'	310'
	2 1/4"	25'	45'	55'	65'	65'	105'	110'	190'
	2 1/2"	20'	40'	50'	60'	30'	60'	110'	180'
	2 3/4"	15'	35'	45'	55'	30'	55'	100'	175'
	3"	10'	15'	20'	20'	25'	50'	50'	95'
LAY FLAT HOSE	1"	200'	290'	380'	475'	350'	640'	930'	1,520'
	1 1/2"	140'	210'	285'	330'	120'	245'	325'	595'
	1 3/4"	120'	175'	235'	275'	120'	205'	300'	500'
	2"	95'	140'	190'	220'	90'	205'	270'	490'
	2 1/2"	70'	105'	140'	165'	80'	185'	270'	430'
	3"	55'	85'	110'	130'	70'	160'	240'	280'
APRX. LBS.		39	48	55	59	70	83	109	169
Size index		1	2	3	4	5	6	7	8

**MOTOR OPTIONS** When ordering, suffix the model number with selection below. \*Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
<b>A</b>	AIR - #4 GAST	COMP. AIR MOTOR	8
<b>E</b>	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
<b>EB</b>	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
<b>ED</b>	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
<b>EA</b>	ELEC. - EXPL. PRF.	115V 1/2 HP REW., AC REV. TYPE	26
<b>H</b>	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6

## REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W		H		L	X	Y		Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.		CRANK	ELEC.		
1	23 7/8"	25 3/4"	23"	18 3/4"	19 1/4"	17 5/8"	15 3/8"	16"	6 1/4"	12"
2	29 7/8"	31 3/4"	29"	18 3/4"	19 1/4"	17 5/8"	23 3/8"	15 3/8"	16"	18"
3	37 1/8"	38"	35 3/8"	18 3/4"	19 1/4"	17 5/8"	29 3/8"	15 3/8"	16"	24"
4	41 1/8"	42"	39 3/8"	18 3/4"	19 1/4"	17 5/8"	33 3/8"	15 3/8"	16"	28"
5	24 3/8"	26"	24 1/2"	26 1/8"	26 1/8"	24"	17"	20 1/8"	20 1/8"	10 1/2"
6	32 7/8"	34 1/2"	33"	26 1/8"	26 1/8"	24"	25 1/2"	20 1/8"	20 1/8"	10 1/2"
7	32 3/8"	34 5/8"	31 7/8"	30"	30"	28"	25 1/2"	24 1/2"	24 1/2"	10 1/2"
8	45 3/8"	47 5/8"	44 7/8"	30"	30"	28"	38 1/2"	24 1/2"	24 1/2"	10 1/2"

Overall Dimensions

Base

Drum



## STORAGE SERIES :: REEL SPECIFICATIONS

### DESIGN

- Professional grade hand crank & motor driven reels to store & maintain long length of hose, cord, cable, wire, rope, tape, chain & other
- Reels have no swivel & no riser, for storage only (Model with suffix -BYXX)
- Sturdy "A" frame base design

### STRUCTURE

- All welded steel "A" frame construction to strengthen the reel structure
- Each of these reels is built on the strength of their standard series with their own unique features & benefits

### RETRACTION

- See page 40 For 1125 Series hand crank & motor driven features
- See page 41 For 1175 Series hand crank & motor driven features
- See page 42 For 1185 Series hand crank & motor driven features

## SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

## POSSIBLE FIELDS OF APPLICATION

- Hose
- Collapsible Hose
- Power Cord
- Cable
- Rope
- Wire
- Barbed Wire
- Tape
- Chain
- ...and much more


## ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Stacking Brackets
- Roller Brackets
- Hoses
- Assorted Reel Accessories

- Mobilize your reel



PG 53

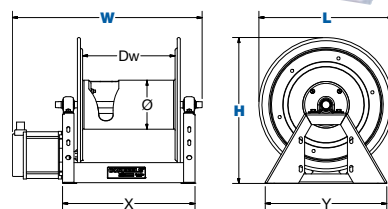

www.coxreels.com • 1.800.COX.REEL

**COXREELS**

**49**

MOTORIZED

HAND CRANK

# ACCESSORIES *SPRING DRIVEN, HAND CRANK & MOTORIZED REELS*

## SWIVELS & O-RING COMPATIBILITY CHART

		Brass	Zinc Plated Steel	Electroless Nickel Plated Steel	Stainless Steel	Aluminum	Melonized Steel
Available Swivel I.D. Female NPT fittings (*BSP fittings available)	1/4"	•	•				•
	3/8"	•	•		•		
	1/2"	•	•		•		
	3/4"	•	•		•		
	1"			•	•		
	1 1/2"			•	•	•	
	2"			•	•		
Available Swivel Seals (Refer to O-Ring Compatibility Chart for desired application)	Buna	•	•	•	•	•	
	EPDM	•	•	•	•	•	
	Viton®	•	•	•	•	•	•
	AFLAS			•	•		

### O-RING COMPATIBILITY CHART

Intended as a general guideline only. Users must test under their own operating guidelines to determine suitability. Please consult factory if your application is not listed.

1 = Recommended | 2 = Fair | 3 = Poor | 4 = Unsatisfactory

	ACETYLENE	AIR (-30°F TO +25°F)	AIR (-25°F TO 200°F)	AIR (200°F TO 300°F)	AIR (300°F TO 400°F)	ANTIFREEZE	FUEL OIL / KEROSENE	GREASE (PETROLEUM BASED)	HYDROCHLORIC ACID	MOTOR OIL (PETROLEUM BASED)	NATURAL GAS	NITROGEN	OXYGEN (200°F TO 300°F)	OXYGEN (COLD)	PESTICIDES	STEAM (BELOW 300°F)	STEAM (300°F TO 400°F)	SEWAGE	SEA WATER	WATER (UP TO 200°F)
→	1	1	1	3	4	2	1	1	3	1	1	1	4	2	2	4	4	1	1	1
→	1	1	1	2	4	1	4	4	2	4	4	1	4	2	4	1	2	1	1	1
→	1	2	1	1	1	2	1	1	1	1	1	1	2	1	1	2	3	2	2	2
→	1	3	1	1	1	1	2	2	1	2	1	1	4	2	1	2	3	1	1	1



Brass Swivels

CNC machined from solid brass swivels are built for general multi-purpose applications. Configured in a 90 degree fluid path with full flow designed. Working pressure up to 3000 PSI & -40°F to 400°F.



Zinc Plated Steel Swivels

Machined from strong low carbon steel and configured in a 90 degree fluid path with full flow designed. Zinc plated steel swivels are recommended for non-corrosive applications. Working pressure up to 5000 PSI & -40°F to 400°F.



Electroless Nickel Plated Steel Swivels

Machined from strong low carbon steel and configured in a 90 degree fluid path with full flow designed. Nickel plated steel swivels are recommended for mildly corrosive applications. Working pressure up to 4000 PSI & -40°F to 400°F.



Stainless Steel Swivels

Machined from high quality, pure 316 stainless steel and configured in a 90 degree fluid path with full flow design. Stainless steel swivels offer superior corrosion protection. Working pressure up to 5000 PSI & -40°F to 400°F.



Aluminum Swivels

Machined from lightweight aluminum and configured in an in-line fluid path with full flow design. Working pressure up to 600 PSI & -40°F to 400°F.



Melonized Steel Swivels

Configured in a 90 degree fluid path with 1/4" ports, melonized steel swivels are used for hydraulic applications. Working pressure up to 10,000 psi & -5°F to 400°F.

\*Temperature rating depends on the seal type selected

## HOSE UPGRADES

### Nitrile Hose

Premium high quality, oil resistant, multi-purpose hose that is excellent for air and water service and many other chemical applications. The high tensile textile cord reinforcement provides excellent kink resistance. This industrial grade hose exceeds RMA Class A-High Oil Resistance requirements. Electrically non-conductive with a minimum resistance of one megohm per inch at 1000 volts DC. Temperature Range: -20°F to +212°F.

SUFFIX	TUBE MATERIAL	COVER	REINFORCEMENT BRAIDS	I.D.	O.D.	PSI	WEIGHT (LBS/FT.)
OG	Black Nitrile	Black Neoprene	2 Textile Spirals	1/4"	1/2"	300	0.12
OG	Black Nitrile	Black Neoprene	2 Textile Spirals	3/8"	1 1/16"	300	0.17
OG	Black Nitrile	Black Neoprene	2 Textile Spirals	1/2"	2 7/32"	300	0.26
OG	Black Nitrile	Black Neoprene	4 Textile Spirals	3/4"	1 5/32"	300	0.39

### EPDM Hose

Versatile general purpose hose that is excellent for air and water service and many agricultural chemical transfer applications. The EPDM tube and cover resists heat, sunlight, ozone and weathering. The high tensile textile cord reinforcement provides excellent kink resistance. This industrial grade hose exceeds RMA class C medium oil resistance requirements. Temperature Range: -40°F to +212°F. **\*NOT SUITABLE FOR THE TRANSFER OF PETROLEUM PRODUCTS.**

SUFFIX	TUBE MATERIAL	COVER	REINFORCEMENT BRAIDS	I.D.	O.D.	PSI	WEIGHT (LBS/FT.)
RH	Black EPDM	Red EPDM	2 Textile Spirals	1/4"	1/2"	300	0.12
RH	Black EPDM	Red EPDM	2 Textile Spirals	3/8"	1 1/16"	300	0.17
RH	Black EPDM	Red EPDM	4 Textile Spirals	1/2"	2 7/32"	300	0.25
RH	Black EPDM	Red EPDM	4 Textile Spirals	3/4"	1 5/32"	300	0.37

### DEF Hose

DEF dispensing hose with stainless steel fittings is designed to convey the high-purity, aqueous urea solution DEF (Diesel Exhaust Fluid). Hose tube compound is specially formulated with low extraction EPDM and peroxide cured to provide superior extraction levels to significantly reduce contamination that can clog a selective catalytic reduction (SCR) system and stop diesel engine of a vehicle. Verified to meet ISO 22241-1. Temperature Range: -40°F to +257°F. Available in 25' & 50' lengths

SUFFIX	TUBE MATERIAL	COVER	REINFORCEMENT BRAIDS	I.D.	O.D.	PSI	WEIGHT (LBS/FT.)
DF	Peroxide cured, low extraction, EPDM	Peroxide cured, low extraction, EPDM	Polyester braid	3/4"	1 1/8"	300	0.30

\*Stainless steel swivel with Viton® seals is required for DEF applications. \*\*Consult factory for different hose length.

## ADAPTORS & REDUCERS



Adaptors are used where the size of the connection device is larger than, or of an equivalent size, to the entry thread of the enclosure.

Reducers are used where the thread size of the entry device is smaller than the entry thread of the enclosure

### REDUCERS

PART NO.	END FITTING	DESCRIPTION	PSI
10780	NPT	3/8" NPT-Female x 1/4" NPT-Male	300 MAX
7541	NPT	1/2" NPT-Male x 1/4" NPT-Female	150 MAX
7545	NPT	1/2" NPT-Male x 3/8" NPT-Female	200 MAX
7845	NPT	1" NPT-Female x 1/2" NPT-Female	3,000 MAX
7845-1	NPT	1" NPT-Male x 3/4" NPT-Female	3,000 MAX
1578	NPT	1 1/2" NPT-Male x 1 1/4" NPT-Female	300 MAX

### ADAPTORS



10781	GHT	1/2" NPT - Female x 3/4" Garden - Male	250 MAX
10782	GHT	1/2" NPT - Male x 3/4" Garden - Male	250 MAX
10783	GHT	3/4" NPT - Male x 3/4" Garden - Male	250 MAX
10784	NPT	1" NPT - Male x 1" NPT-Male	4,000 MAX
7540	NPT	1/2" NPT - Male x 3/4" NPT - Female	6,000 MAX
7540-1	NPT	1/2" NPT - Male x 1/4" NPT - Female	6,000 MAX
7765-1	NST	1" NPT - Male x 1" NST - Male	300 MAX
7765-2	NST	1 1/2" NPT - Male x 1 1/2" NST - Male	300 MAX
7817	JIC	1/2" NPT - Male x 7/16-20 (-5) JIC	4,000 MAX
7818	JIC	3/8" NPT - Male x 1/2-20 (-4) JIC	4,000 MAX
7821	BSP	1/2" -14 NPT - Male x 1/4" 19 BSP - Female	4,500 MAX
7848	NPT	1/2" -14 NPT - Male x M14 1 1/2" Female	6,000 MAX
8165	Victaulic	2" NPT - Male x Victaulic	1,000 MAX



## MOUNTING & ROLLER BRACKETS

PART NO.	REEL SERIES									
	P	SH, MP & HP	T	C	EN	PC	P-W & SHW	P-WC	Alumi-Pro®	Nitro-Pro®
 <b>Swing Bracket</b> For vertical surface mounting, allows reel to swing 180°. Powder coated crinkle black 3/16" steel. Weight: 5 lbs.	<b>15720</b>	•	•			•	•	•	•	•
<b>15725</b>				•	•					
 <b>Swivel Bracket</b> For horizontal surface mounting, ball bearing rotation, allows reel to swivel 345°. Powder coated crinkle black heavy gauge steel. Weight: 6 lbs. NOT FOR USE IN CEILING APPLICATIONS.	<b>15721</b>	•	•	•	•	•	•	•	•	•
 <b>EZ-Up Bracket</b> Reel easily slides in & out for easy overhead mounting. Use as an alternative to the #MR-1. Must be ordered with #15724 for "I" or "H" beam installations. Weight: 6.5 lbs.	<b>15723</b>	•	•	•	•	•	•	•	•	•
 <b>EZ-Up "I" or "H" Beam Adapter</b> Must be ordered with #15723. Powder coated crinkle black, all steel construction. Weight: 5 lbs.	<b>15724</b>	•	•	•	•	•	•	•	•	•
 <b>Mounting Bracket</b> For overhead mounting, fits 3" to 8 1/2" flange on "I" or "H" beam. Powder coated crinkle black 3/16" bent steel. Weight: 13 lbs.	<b>MR-1</b>	•	•			•	•	•	•	•
<b>MRT-1</b>				•	•					
 <b>4-Way Roller Bracket</b> Heavy gauge steel, powder coated Coxreels blue (4RB). Available in stainless steel (4RB-SS). Weight: 1 lbs.	<b>4RB</b> 1/4"-3/4"	•	•	•	•	•	•	•	•	•
<b>4RB-SS</b> 1/4"-3/4"		•	•	•	•	•	•	•	•	•

## S SERIES MOUNTING & ROLLER BRACKETS

PART NO.	S SERIES MODELS			
	SR13 & SL13	SR15 & SL15	SR17 & SL17	SR19 & SL19
 <b>Dual Side Mount Bracket</b> Heavy gauge steel, powder coated crinkle black. Weight: 5 lbs.	<b>15726-13</b>	•		
<b>15726-15</b>		•		
<b>15726-17</b>			•	
<b>15726-19</b>				•
 <b>Single Side Mount Bracket</b> Heavy gauge steel, powder coated crinkle black. Weight: 2 lbs.	<b>SMB1</b>	•	•	
<b>SMB2</b>			•	
<b>SMB3</b>				•

## PVC INLET HOSE ASSEMBLIES

PART NO.	FITTINGS	I.D.	LENGTH	PSI
<b>5150-1.5</b>	1/4" Male x Female NPT	1/4"	18"	300
<b>5153-1.5</b>	3/8" Male x Female NPT	3/8"	18"	300
<b>5154-1.5</b>	1/2" Male x Female NPT	1/2"	18"	300
<b>5155-1.5</b>	3/4" Male x Male NPT	3/4"	18"	300
<b>5224-1.5</b>	3/8" Male x Male NPT	3/8"	18"	3000
<b>5256-1.5</b>	1/2" Male x Male NPT	1/2"	18"	2500
<b>5290-1.5</b>	3/4" Male x Male NPT	3/4"	18"	1500
<b>5304-1.5</b>	1/4" Male x Male NPT	1/4"	18"	5000
<b>5336-1.5</b>	3/8" Male x Male NPT	3/8"	18"	4000
<b>15717</b>	Garden 3/4" NPTM (w/Part #10781) x 3/4" NP	3/4"	48"	300
<b>5423-1.5</b>	Twin Grade R 1/8" NPTM x BB 9-16 UNF	1/4" Twin	18"	200
<b>5424-1.5</b>	"T" Grade Twin Grade R 1/8" NPTM x BB 9-16 UNF	1/4" Twin	18"	200

## 90° ELBOWS

PART NO.	FITTING THREAD	I.D.	PSI
<b>6088</b>	Brass LP Male x Female NPT	1/4"	300
<b>208</b>	Brass LP Male x Female NPT	3/8"	300
<b>222</b>	Brass LP Male x Female NPT	1/2"	300
<b>385</b>	Brass LP Male x Female NPT	3/4"	300
<b>500</b>	Steel MP Male x Female NPT	3/8"	3000
<b>1671</b>	Steel MP Male x Female NPT	1/2"	3000
<b>15014</b>	Steel MP Male x Female NPT	3/4"	1250
<b>616</b>	Steel HP Male x Female NPT	1/4"	5000
<b>617</b>	Steel HP Male x Female NPT	3/8"	5000

## HOSE STOPS & GUARDS

HOSE STOPS PART NO.	HOSE GUARD PART NO.	HOSE		OVERALL
		I.D.	O.D.	
<b>131</b>	<b>237-1</b>	1/4"	1/2"	2 1/2"
<b>633</b>	<b>237-1</b>	1/4" Twin Line		3 1/2"
<b>131-3</b>	<b>237-1</b>	3/8"	2 1/32"	2 1/2"
<b>131-4</b>	<b>398-1</b>	1/2"	3/4"	2 1/2"
<b>254</b>	-	1/2"	3/4"	3 1/2"
<b>430</b>	<b>398-1</b>	3/4"	1"	3 1/2"
<b>20214</b>	-	1"	1 9/16"	5"
<b>20215</b>	-	1 1/4"	1 13/16"	5"
<b>20216</b>	-	1 1/2"	2 1/16"	5"
<b>20217</b>	-	2"	2 9/16"	5"

## BEND RESTRICTORS

ADD SUFFIX	I.D.	DESCRIPTION	PSI
<b>-BxB</b>	1/4"	Black PVC Bend Restrictor	
<b>-BxB</b>	3/8"	Black PVC Bend Restrictor	
<b>-BxB</b>	1/2"	Black PVC Bend Restrictor	

Designed to limit the degree of bending without compromising the integrity of the hose assembly while also preventing the hose-end from kinking, excessive wearing, and tearing.

## QUICK DISCONNECTS





PART NO.	I.D.	DESCRIPTION	CONNECTION	PSI
<b>10759-1</b>	1/4"	Quick Disconnect	NPT (F)	300
<b>10759-2</b>	3/8"	Quick Disconnect	NPT (F)	300

Quick disconnect couplings thread onto end of hose fitting to provide fast, leak-proof connections for low pressure hose lines. Conveniently connect, interchange, and secure pneumatic tools or other spraying devices to any air, water, chemical or other hose lines.

# ACCESSORIES HAND CRANK & MOTORIZED REELS

## ROLLER BRACKETS



### 4-WAY ROLLER BRACKETS

	PART NO.	AVAILABLE FOR SERIES				
		1125	1175	1185	1195	1275
	<b>15353*</b>	•				•
	<b>15355*</b> 1275W-C					•
	<b>15357*</b>		•			
	<b>15368*</b> 28" disc size				•	
	<b>15368-1*</b> 32" disc size				•	
	<b>15369*</b> 24" disc size			•		
	<b>15358*</b>	•				•
	<b>15356*</b>		•			
	<b>15354*</b>	•				•
	<b>15037*</b>		•			
	<b>15370-1*</b>			•		
	<b>15370*</b>				•	
	<b>15353-P*</b>	•				

\*Add drum width dimension as the suffix to the part number

EXAMPLE: An 1125-4-200 reel drum width is **12"**. Order part number: **15353-12**


### 3-WAY ROLLER BRACKET ASSEMBLIES

	PART NO.	AVAILABLE FOR SERIES			
		1125	1175	1185	1275
	<b>15359*</b>	•			•
	<b>15360*</b> 24" disc size		•	•	
	<b>15361*</b> 28" disc size			•	
	<b>15362*</b>	•			•
	<b>15363*</b> 24" disc size		•	•	
	<b>15364*</b> 28" disc size			•	

\*Add drum width dimension as the suffix to the part number

EXAMPLE: An 1125-4-200 reel drum width is **12"**. Order part number: **15359-12**




### 1125 SERIES STACKING BRACKET

	PART NO.	AVAILABLE FOR SERIES	
		1125	1125W/L
	<b>7480</b>	•	•







\*Add drum width dimension as the suffix to the part number

EXAMPLE: An 1125-4-200 reel drum width is **12"**. Order part number: **7480-12**


## HOSE GUIDES

	PART NO.	AVAILABLE FOR SERIES		
		1125	1175	1185
	<b>15732</b> Top Return	•		
	<b>15733</b> Bottom Return	•		
	<b>15728</b> Bottom Return		•	•
	<b>15729</b> Top Return		•	
	<b>15730</b> Top Return			•
	<b>15734</b>	•		







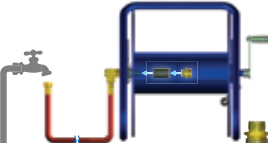







## MODEL UPGRADES & ADDITIONS

	PART NO.	AVAILABLE FOR SERIES				
		1125	1175	1185	1195	1275
	<b>20843</b>	•	•	•	•	•
	<b>7406</b>	•				
	<b>7700</b> 24" disc size		•			
	<b>8176</b>			•		
	<b>8176-1</b> 24" disc size			•		
	<b>8176-2</b> 28" disc size			•		
	Prefix model <b>BX-</b>	•				
	Prefix model <b>BH-</b>	•				
	<b>7429-1-4</b>	•				
	<b>7429-1-5</b>	•				
	<b>15735</b>	•				



## GARDEN HOSE KIT

	PART NO.	AVAILABLE ON	
		1/2" Plumbing	On Any Reel
	<b>15717</b>	•	


## SPEED CONTROLLERS FOR MOTORIZED MODELS

SPEED CONTROLLERS FOR MOTORIZED MODELS		PART NO.	MOTOR OPTIONS				
			E	EB	ED	EA	EF
	<b>Explosion Proof Stationary Push Button Switch</b> For 12V D.C. applications, must be used with solenoid. Cast 3/4" N.P.T. hub inlet	<b>20882</b>	•				
	<b>Vapor Proof Junction Box</b> Includes box cover and gasket, has three 3/4" N.P.T. hubs	<b>20883</b>	•	•	•	•	•
	<b>General Purpose Reversing Switch</b> For direct starting and reversing of A.C. rewind motor	<b>15210</b>				•	
	<b>Sealed Push Button Switch</b> Weather proof, dust proof momentary contact. To be used with solenoid	<b>20876</b>	•	•	•	•	•
	<b>Solenoid Relay</b> 12V D.C. for activating motor	<b>20877</b>	•		•		
	<b>Circuit Breaker</b> 50 amp automatic reset, circuit breaker. A circuit breaker is recommended for all 12V D.C. explosion proof motors	<b>20878</b>	•		•		
	<b>Switch Box</b> (Includes #20876, #20877, & #20878 and all parts needed to assemble the entire switch box) - Casting is powder coated crinkle black	<b>8281</b>	•		•		
	<b>115/230 AC/Volt Variable Speed Controller</b> 10-amp fuse • On/off push button switch • Forward/reverse feature	<b>20875</b>				•	
	<b>115/230 AC/Volt Variable Speed Controller</b> 10-amp fuse • On/off push button switch	<b>20874</b>				•	
	<b>115/230 AC/Volt Variable Speed Controller</b> 10-amp fuse	<b>20873</b>				•	
	<b>12 Volt DC Electric Motor Variable Speed Controller</b> On/off push button switch • Relay, 50-amp circuit breaker • Forward/reverse feature	<b>20872</b>	•		•		
	<b>12 Volt DC Electric Motor Variable Speed Controller</b> On/off push button switch • Relay, 50-amp circuit breaker	<b>20871</b>	•		•		
	<b>12 Volt DC Electric Motor Variable Speed Controller</b>	<b>20870</b>	•		•		
	<b>Electric Motor Speed Controller</b> For AC motors	<b>20868</b>				•	
	<b>Electric Motor Speed Controller</b> For DC motors	<b>20869</b>	•	•	•		•


## SPEED CONTROLLERS FOR MOTORIZED MODELS

	PART NO.	MOTOR OPTIONS	
		A	AB
 <b>Control Valve</b> Control valve for No. 4 Gast Air Motor available upon request	<b>15212</b>	•	
 <b>Control Valve</b> Control valve for No. 6 Gast Air Motor available upon request	<b>15212-1</b>		•

## PORTABLE HOSE REEL CART

	PART NO.	AVAILABLE FOR SERIES			
		1125	1175	1185	1275
 <b>Portable Cart</b> Steel round handle detaches for compact storage. Steel front legs with rubber feet prevent sliding. High grade ball bearings with hardened cup. 1/2" diameter steel axle. Solid 8" rubber tires. For 8" semi-pneumatic tires order model #PRP. Weight: 17 lbs.	<b>PR-1125-6</b> 1125-4-100 1125-5-50	•			
	<b>PRP-1125-6</b> 1125-4-100	•			
	<b>PR-1125-12</b> 1125-4-200 1125-4-200-BYXX 1275-4-100	•			•
	<b>PRP-1125-12</b> 1125-4-200 1125-4-200-BYXX 1275-4-100	•			•
	<b>PR-1175-11</b> 1175-6-100 1175-6-100-BYXX 1185-1125		•	•	
	<b>PRP-1175-11</b> 1175-6-100 1175-6-100-BYXX 1185-1125		•	•	
	<b>PR-1175-15</b> 1175-6-150 1185-1524		•	•	
	<b>PRP-1175-15</b> 1175-6-100 1185-1524		•	•	
	<b>PR-1125-HC</b>	•			

## SM SERIES MOUNTING BRACKET

	PART NO.	AVAILABLE ON	
		SM	
 <b>Mounting Bracket</b> Pivoting base for wall mounting only. Heavy gauge steel construction, powder coated crinkle black. Includes rigid arm with 8-position locking pivot base. Weight: 8 lbs.	<b>SMK-202</b>	•	

## DISTRIBUTORS MERCHANDISING DISPLAY

Coxreels Point of Purchase Merchandising Display is a proven "Sales Generator."

INCLUDES: Heavy-duty powder coated steel display rack, full color product specific hang tags, tri-fold brochures with mountable tri-fold holder & full-color display banner!

- Safe & Simple Demonstration Tool
- Creates Visual Impulse Purchases
- Mix & Match Up To Four Coxreels Models
- Durable Crinkle Black Powder-Coat Finish
- Adjustable Leveling Feet To Prevent Rocking
- Fast & Easy To Assemble
- No Additional Parts Necessary
- Offered Exclusively By Coxreels

Dimensions: 27" W x 58" H x 24" D  
Weight: 50 lbs

To get a P.O.P. display working for you, call Coxreels Customer Service Department at 1-800-269-7335 and order yours today!





# CUSTOMIZE YOUR REEL

## FROM CONCEPT TO COMPLETION

### CUSTOMIZE YOUR REEL WITH COXREELS CUSTOM PRODUCTS:

Our engineering capabilities and manufacturing processes allow us to design and build top quality products for any conceivable application where reels are needed.

- Customize fluid paths/axes or create custom brackets, mounts, and accessories.
- Integrate with your specific hardware, systems, or devices.
- Modify drums, add divider disks, manipulate openings, or integrate hose handling devices.
- Combine features of various reel model lines, creating your own hybrid reel.
- Create custom retraction systems.
- Increase temperature and pressure capabilities, or multiply fluid paths.
- The possibilities are only limited by your imagination!




**CPs & CCRs** :: Coxreels offer two types of custom products. CCRs and CPs each offer specific benefits to our customers.

**CCR**s or Cox Custom Reels are custom reels assembled out of existing components. CCRs allow customers to combine features of various reels and create completely new reel lines. CCRs range from simple request of swivel size changes and hose combinations to a new dual hose side mount reel built by combining our MPD-N-430 with the mounting of a SG17-430.

**CP**s or Custom Products are custom reels that fall into a more demanding category that allows customers to request completely custom components and assemblies specific to their application. CPs include simpler items like custom powder coat colors and new special hoses and also more complex requests in the vein of new interfacing brackets and frames, or divider disks and even new mounting bases. CPs allow OEMs, factories, and industry specific companies to get a leg up on their competition by having a reel incorporated into their product or service only available to them. Match the right color, incorporate your own drive system, or develop a new product just for you!

### POWDER COAT OPTIONS\*

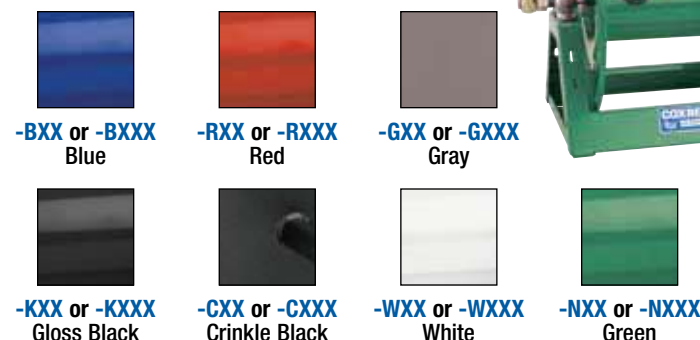

To add any of these options to your designated reel simply add the option number to the suffix of the model number. 3 digit suffix for spring driven or 4 digit suffix for hand crank & motorized models. Consult factory for custom color match.

To order a 1125-4-200 with green color, simply suffix the option model number on the reel model number Example: 1125-4-200-NXXX



To order a P-LP-350 with black color, simply suffix the option model number on the reel model number Example: P-LP-350-KXX

\*Minimum quantity & or dollar amount may apply

### POPULAR OPTIONS TO CUSTOMIZE YOUR REEL

To add any of these options to your reel simply suffix the option number after the model number. Consult factory for more options.

#### for SPRING DRIVEN REELS

- "-BVX" ... Change to Viton® seals
- "-BAX" ... Change to stainless steel fluid path & nitrile seals
- "-BBX" ... Change to stainless steel fluid path & Viton® seals
- "-BWV" ... Change to stainless steel swivel with food grade seals & non-toxic grease
- "-BVB" ... Add bend restrictor to hose
- "-BVC" ... Add Constant Tension (No latching mechanism)

#### for HAND CRANK & MOTOR DRIVEN REELS

- "-BVXX" ... Change to Viton® seals
- "-BAXX" ... Change to stainless steel fluid path & nitrile seals
- "-BBXX" ... Change to stainless steel fluid path & Viton® seals
- "-BDXX" ... Change to stainless steel swivel with food grade seals & non-toxic grease
- "-BXCX" ... Top 4-way rollerbracket



To order a P-LP-350 with a bend restrictor simply suffix the option model number on the reel model number Example: P-LP-350-BXB

## 2 YEAR WARRANTY

Products manufactured by Coxreels are warranted for a period of two years from the date of sale to original purchaser. If within such warranty period any such equipment is proved, to Coxreels' satisfaction, to be defective, Coxreels shall be liable for the repair or, at Coxreels' option, replacement when the product is returned, freight prepaid, to Coxreels' plant or a Coxreels' service dealer. Coxreels' obligation hereunder shall be confined to such repair or replacement and shall be further conditioned upon Coxreels receiving written notice of any alleged defect within ten days after its discovery. Coxreels assumes no responsibility for improper choice of models or where products are used in excess of rated capacities and design functions, or under abnormal conditions. We make available a free engineering service to help with any product selection, application or problem.

Warranty is void if the product or any part thereof has been tampered with, altered, or repaired by other than authorized service personnel. Coxreels' responsibility ceases upon delivery to any common carrier, and we do not, unless previously instructed, insure shipments beyond point of delivery to such carrier. Any products, components or accessories that are not manufactured by Coxreels and are supplied by other manufacturers are subject to their respective guarantees or warranties. Certain products will carry their own warranties. Equipment specially built to customers' specifications and requirements is not subject to cancellation nor returnable for credit under any condition. We reserve the right to modify or alter materials, dimensions, design and construction, when necessary, to improve performance.

## RETURN POLICY

- No material will be accepted for return without written authorization by the factory, and a return goods authorization number assigned. Materials must be returned prepaid. A 20% restocking fee and a \$5.00 repacking charge normally applies. No material will be accepted for a credit after one year from the date of purchase. Custom products and special orders are not returnable.

## STATEMENT OF HOSE APPLICATIONS

Coxreels does not manufacture any hose. All hose supplied by Coxreels is selected from reliable commercial sources and is recommended for application on the basis of data supplied by the manufacturer. Coxreels assumes no responsibility for any other application or use. Hose supplied by Coxreels carries the warranty as listed by the manufacturer (90 days).

## TERMS

- Net 30 days on approved credit • Minimum billing \$25.00
- Service charge 11/2% on past due accounts

## FREIGHT

- F.O.B. Factory • Our responsibility ceases upon delivery to common carrier. Consignee must file claim for shortage and damaged freight with the carrier.

## DELIVERY

- Most standard items are shipped in five - ten business days or less. Consult customer service for availability.



## Coxreels' Customer Service - 1.800.269.7335

Call and request a Returned Merchandise Authorization# (RMA #). Warranty claims must be made by authorized Coxreels distributors. Be prepared to give the following information: product model number, serial number and purchase invoice number.

- Replacement parts ordered will be invoiced to your account.
- Once given an RMA #, you must write it on all boxes and paperwork. Coxreels will not accept your return without an RMA #.
- Upon receiving the return, if it is determined to be covered under warranty, a credit memo will be issued and mailed to you for your records.



# SAFETY FIRST



## PLEASE REVIEW ALL SAFETY INFORMATION BEFORE CHOOSING & USING ALL EQUIPMENT

**SERIOUS INJURY, DEATH & DESTRUCTION OF PROPERTY** can result from improper selection or improper use of products described in this catalog. Since COXREELS has no control over the number and variety of applications for which its products may be purchased or the conditions under which they may be used, COXREELS liability on any claim, whether in contract, tort (including negligence), or otherwise, for any loss or damage shall in no case exceed the price paid for product or any part thereof which give rise to claim. However, the general information contained herein shall allow the customer to select and assume all responsibility for product acceptability and fitness for specific applications. As always, COXREELS technical assistance and support is available for your convenience.



### WARNING - USER RESPONSIBILITIES

The customer, installer, and end users shall, through analysis and testing, assume sole **responsibility in making the final selection of reels and accessories**. Furthermore, these parties shall hold COXREELS harmless for all liability, claims, suits, and expenses incurred. These parties shall ensure training, performance, endurance, routine inspections, maintenance, safety precautions and warnings regarding the application are enforced at all times. COXREELS is not responsible for use of products in excess of rated and recommended capacities, design functions, or abnormal conditions.



### CAUTION - PROPER SELECTION OF ACCESSORIES

Coxreels offers a wide variety of accessory items and optional features for its reels. It is the sole responsibility of the customer, installer, and end users to **ensure that the proper items and features have been selected** to fit the application. Consult with Coxreels technical support for available accessories and optional features which will help you to keep your product safe in its environment. These items may include mounting brackets, guards, guides, and electrical components.



### WARNING - FOLLOW INSTRUCTIONS

The customer, installer, and end users shall ensure that all potential users of these products receive **continual training** and access to all relevant **product manuals and safety instructions**. This information should be thoroughly reviewed prior to installation, stored and reviewed continually during use of the product. Coxreels assumes no responsibility for fitness of installation and continued use in specific applications. Any overhead installations should be such that the reel is not supported solely by bolts under tension. A safety chain or cable is necessary to eliminate potential for damage or personal injury.



### IMPORTANT - FOLLOW GOOD MAINTENANCE PRACTICES

When receiving your products, **establish a program** for inspection, testing, and periodic replacement of worn items depending on factors such as: severity of application, frequency of equipment use, and past performance indicators. Use **only properly trained** persons to perform these duties. Update training periodically. **Document** the maintenance, inspections, and testing of products. **Never allow** an improperly functioning reel or accessory product to be put into use.

Documented inspections shall include in part, pressurized units, swivel joints, hose, hose fittings, cable, mounting hardware, roller guides and any such moving parts. Never allow the use of hoses or cables other than what is intended in the design of the reel. Changes in diameter, weight, length, or flexibility can affect the function and may cause damage or personal injury. Consult specific product manuals, or factory, with any questions regarding proper maintenance practices.

The use of any replacement components other than those provided by Coxreels is prohibited. Coxreels shall be held harmless from any improper selection of such components which may affect function and overall safety of the product.

**NOTE:** All designs, specifications, and dimensional data contained in this book are subject to change without notice. No additional warranties, express or implied, including warranties of merchantability for fitness for a particular purpose, are created by the descriptions and depictions of the products on in this book.





**CORPORATE HEADQUARTERS:**

Tempe, Arizona USA

Phone: 480.820.6396 Fax: 480.820.5132

Toll Free: 800.COX.REEL Toll Free Fax: 800.229.REEL

[www.coxreels.com](http://www.coxreels.com) [info@coxreels.com](mailto:info@coxreels.com)



**INTERNATIONAL:**

EUROPE / MIDDLE EAST / AFRICA

Phone: +44 (0) 1536 464 990

Fax: +44 (0) 1536 464 999

[www.crireels.com](http://www.crireels.com) [sales@cireels.com](mailto:sales@cireels.com)