

Dailey Supply, Inc.

Fall Protection

FCP FrenchCreek
Production

Dailey Supply, Inc.
2955 West 17th St, Suite 5
Erie, PA 16505

814.833.7227
814.838.3285 Fax
www.DaileySupply.com

FrenchCreek Production



AMERICAN MADE. AMERICAN OWNED.

www.frenchcreekproduction.com



fall protection
2016-2017

IMPORTANT: The ABC's

Personal fall arrest systems are comprised of three key components. These components must be used together to provide protection from a fall, and are often referred to as the ABC's of fall protection. The ABC's are listed below, and visually shown on page 3.

A Anchorage/Anchor Connector - anchorages are a secure point of attachment to a structure. Anchorages and Anchor Connectors can vary widely by industry, type of work performed, installation environment, and surrounding structure(s).

B Body Support - Full Body Harnesses distribute fall arrest forces over the upper thighs, chest, and shoulders. A full body harness will have a connection point for the worker to be properly attached.

C Connecting Device - Connecting Devices join the Body Support to the Anchorage/Anchor Connector. Connecting devices can be shock absorbing lanyards or retractable lifelines.

Fall Distance Calculator	2	Lifelines, Rope, Rope Accessories	33
ABC's of Fall Protection	2 - 3	Rope Grabs	34
Harness Options & Accessories	4 - 5	Roofer's Kits	35
STRATOS Harnesses, NAVIGATOR Harness	6 - 8	Anchors, Anchorage Connectors	35 - 41
STRATOS Lanyards	9	Horizontal Lifeline Systems	42 - 43
Harnesses	6 - 18	Tower, Ladder, Rail Climbing Systems	44
Specialty Harnesses	15 - 17	Cable Climbing Systems	45
Workseats	18	Ladder Lock System	45
The TRACKER (RFID tracking technology)	19	Rescue, Recovery, & Confined Space Systems	46 - 52
Lanyard Options & Accessories	20	Tripods and Accessories	46 - 47
Lanyards	20 - 26	Quad Pod, Davit Systems	48
LANCHOR (Tie-back Lanyard)	23	Controlled Descent Devices	49
U-RES-Q Lanyards (Self-Rescue Lanyard / Ladder)	26	Remote Prompt Rescue Kit	50 - 51
Rebar Assemblies	27	Confined Space Accessories	51
Self Retracting Lifelines (SRL's)	28 - 30	Flexible Access Ladders	52
RENEGADE Self Retracting Lifeline	28	Carry Bags & Pouches	52
ROGUE Self Retracting Lifeline	29	Firefighter Belts (Pacmule Belts)	53
Hardware (Snap Hooks & Carabiners)	31 - 32	Training Programs	54 - 55
"Z Series" Hardware Description (ANSI Z359)	32	DVD Video, Guide to Fall Protection	55

How to Calculate Your

FALL DISTANCE


This Diagram explains how to calculate your Fall Distance Clearances, utilizing a standard 6' Shock Absorbing Lanyard

If you are unsure about any of the calculations in this diagram, or you remain uncertain on how to safely protect yourself while working at heights, please contact us immediately.



Only trained, competent workers are permitted to work at heights and utilize fall protection equipment. If you need further training, please contact us immediately.

Please read ALL instruction manuals, and follow ALL directions for the proper use of equipment. Always fully understand how to use and inspect the equipment prior to working at heights or in hazardous situations, and ALWAYS have a rescue plan in place.

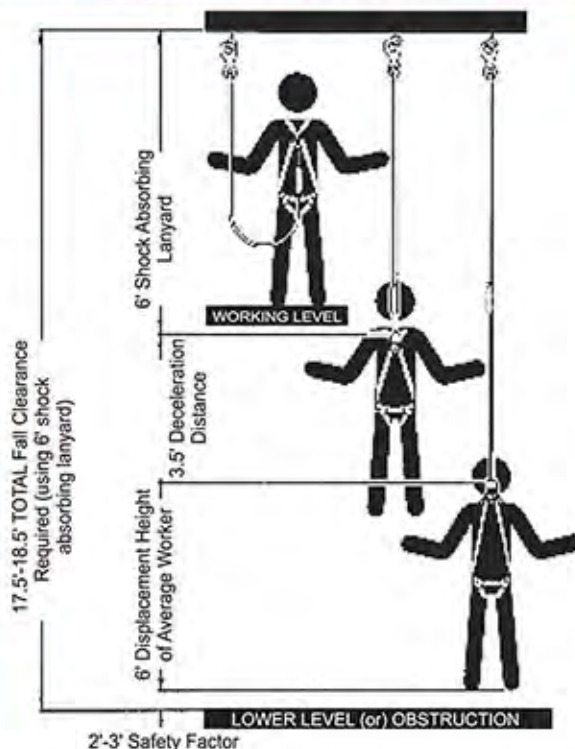

of FALL PROTECTION

shown in the photo:
A. 1702 beam anchor
B. 22850 STRATOS harness
C. M2RG-0Z ROGUE dual-leg
self-retracting lifeline (SRL)

ABC's of fall protection

A
ANCHORAGE

B
BODY
SUPPORT

C
CONNECTING
DEVICE



FCP's fall protection/confined space/rescue training programs provide you and your employees with the timely product and knowledge requirements that they need to be productive, safe and in compliance. We offer a variety of training courses, ranging from strictly classroom discussion courses to courses that involve hands-on training. Training can be done at your facility or ours. With our training, your employees will have the skills and knowledge to be safer and compliant with today's laws & regulations. More info on pages 54-55.

1.877.228.9327

FrenchCreek
FALL SAFETY EQUIPMENT
AMERICAN MADE. AMERICAN OWNED.

harness options

FCP offers many harness options including: webbing color, padding, D-ring placements, and buckle closures. Plus, we can customize your harness to suit any specific needs. Please inquire for further details concerning customizing & custom orders. Stainless Steel adjusters, buckles & rings are also available upon request.

Option A - *Shoulder pads (two pieces)* 'SuperNit' technology incorporates a moisture management system with an anti-microbial coating

Option B - *Hip D-rings for positioning*

Option C - *Quick connect bayonet buckle chest strap (chest strap only)*

Option D - *Shoulder D-rings*

Option F - *Leg pads (two pieces)* 'SuperNit' technology incorporates a moisture management system with an anti-microbial coating

Option H - *Front chest D-ring for positioning*

Option P - *Removable, washable, retrofit back & shoulder pad (one piece)* 'SuperNit' technology incorporates a moisture management system with an anti-microbial coating

Option 9 - *Additional back D-ring with extension strap built into harness*

Buckle Options: ① Friction Buckle, ② Mating Buckle, ③ Grommet/Tongue Buckle, ④ super-quick Bayonet Buckle



harness accessories

Numerous accessories are available for FCP's harnesses. If you don't see exactly what you need, please inquire. Stainless Steel adjusters, buckles, and rings are also available.

♦♦ = Quick Ship Item

- ♦♦ **1418** - 18" x 1 3/4" D-ring extension strap with D-ring on one end & locking snap on other end, as shown.
- 1418-LOOP 400R** - 18" x 1 3/4" D-ring extension with choke loop.
- 400SB** - Sliding buckle cover/insulator, as shown.
- 400BC** - Flame resistant buckle covers for chest & leg, as shown. (*harness not included*)
- 800PS** - Removable saddle (*page 12*) for comfort, positioning and suspension applications, as on the 850ABT (*page 13*). Must be used in conjunction with a full body harness.
- 854WB VIZ** - Replacement tool belt for 800 Series harness.
- 854WB VIZ** - Removable/cleanable class II ANSI hi-visibility vest sold separately as an accessory, or added to a harness as an option (*example: 650VIZ*). Ultra-cool mesh vest has zipper front, inside left chest 2-tier 4-division pencil pocket, & lower inside right patch pocket. Secures to harness with 4 velcro attachment points.
- TL3** - Single leg tool lanyard, as shown.
- TL3DL** - Dual leg tool lanyard, as shown.
- ID** - Tracker Series ID chip built into harness webbing. The RFID Tracker chip, along with WorkerScan software enables you to keep digital records for inventory, inspections, OSHA records, and other pertinent information! Step into the technology age! (*More Tracker info on page 19*)
- ID-RETRO** - Tracker Series ID chip built into a retro-fit pack that can be attached to all of your equipment, as shown. Other methods of retrofitting are available, please inquire. (*More Tracker info on page 19*)



The TRACKER

Offering a full line of 'Tracker Series' Products, including Harnesses, Lanyards, & other related safety equipment.



1418



1418-LOOP



400R
Lanyard Retainer



400SB
Sliding Buckle Cover



400BC
FR Buckle Covers



TL3
Tool Lanyard



TL3DL
Tool Lanyard



VIZ



VIZ (Back)



ID-RETRO
(Use it to 'track' your current equipment!)

U-STEP



U-STEP



U-STEP Installed
& U-STEP deployed



u-step

helps alleviate SUSPENSION TRAUMA

U-STEP - The U-STEP comes complete with two compact, lightweight 'packs' that easily attached to the sides (left & right) of a full body harness. In the event of a fall, a worker can pull the webbing from the 'packs', connect the locking clasps creating an adjustable loop that the suspended worker can step on to alleviate harness pressure, and reduce the risk of suspension trauma. Must be used in conjunction with a full body harness and a complete fall prevention/rescue program. Fits most harness sizes, styles, and brands.

Another tool in combating Suspension Trauma! Also check out the U-RES-Q, Self-Rescue Ladder/ Lanyard (*page 26*).

enter the **NEXT LEVEL**

High-strength Webbing
Certified, synthetic webbing provides UV and chemical resistance. Custom color options are available.

Integral strato-lite Back/Shoulder Pad & Waist Pad
Flame resistant open cell foam with air-mesh fabric for softness, breathability, and moisture control.

D-ring Options
D-rings are zinc plated and powder coated providing high corrosion resistance. Many options are available.

Label Cover
Heavy-duty, abrasion resistant velcro label cover protects label information.

High-strength Stitching
High-strength, high-contrast stitching for ultra performance and extraordinary visual appeal.

Buckle Options
Buckles are zinc plated and powder coated black providing extended corrosion resistance. Many buckle options are available. Please see part numbers and descriptions.

Lanyard Retainers & Webbing Keepers
Thermo-formed retainers and keepers on both sides of the chest straps.

D-ring Options
D-rings are zinc plated and powder coated black, providing extended corrosion resistance. Many D-ring options are available. Please see part numbers and descriptions.

Integral strato-lite Comfort Leg Pads
Flame resistant open cell foam with air-mesh fabric for softness, breathability, and moisture control.

Subpelvic Strap
Additional rear strap provides extra comfort & security.

Integral strato-lite Comfort Leg Pads
Flame resistant open cell foam with air-mesh fabric for softness, breathability, and moisture control.

6 Point Adjustment
Provides perfect fit & comfort.

OPTIONS for the STRATOS Harness:

- Option B - hip D-rings for positioning
- Option D - shoulder D-rings
- Option 9 - additional back D-ring with extension strap built into harness
- Option H - chest D-ring
- Option ID - TRACKER chip, provides permanent RFID identification
- Option U-STEP - suspension trauma straps

Model Shown: 22870B

All models come standard in Green/Black

in fall protection

The innovative STRATOS Series of full body harnesses exceed expectations at the highest level. Designed with safety, durability, and maximum comfort as the finished product, the FrenchCreek STRATOS Series hit the mark. All STRATOS Series harnesses come complete with strato-lite comfort shoulder/back pad and leg pads permanently affixed to keep them in the ideal position. Strato-lite padding is specifically designed with open-celled air-mesh for breathability and moisture control for maximum comfort. Meeting and exceeding OSHA and ANSI standards, this American Made STRATOS Series of harnesses can truly be considered the Professional's Choice.



22650 - 5 point adjustment with grommet/tongue buckle leg straps, as shown

Similar Models:

22650B - 22650 with hip positioning D-rings

22670 - 5 point adjustment with quick-connect bayonet leg straps

22670B - 22670 with hip positioning D-rings

*Weights for the 22650 Series start at 2.9 lbs.

22850B - 6 point adjustment with comfort waist pad & removable tool belt, grommet/tongue buckle leg straps, & hip positioning D-rings


Similar Models:

22870B - 6 point adjustment with comfort waist pad & removable tool belt, quick-connect bayonet leg straps, & hip positioning D-rings

*Weights for the 22850 Series start at 4.2 lbs.

♦♦ = Quick Ship Item

Sizing Chart for the STRATOS Harness

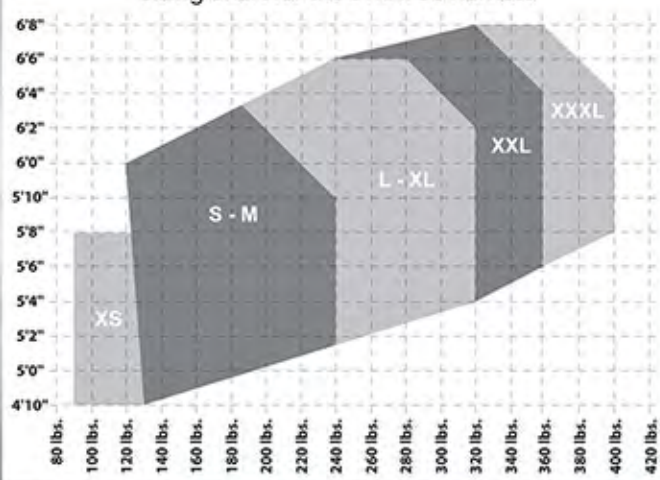

COLOR OPTIONS for the STRATOS Harness:



LEG BUCKLE OPTIONS for the STRATOS Harness:



the STRATOS harness

STRATOS harnesses come standard in GREEN/BLACK webbing



22950



22950 (back)



22970



22850BH-ALT



22850BH-ALT (back)

22950 - 4 point adjustment cross-chest design with chest D-ring, & grommet/tongue buckle leg straps, as shown

Similar Models:

22950B - 22950 with hip positioning D-rings

22970 - 4 point adjustment cross-chest design with chest D-ring, & quick-connect bayonet leg straps

22970B - 22970 with hip positioning D-rings

*Weights for the 22950 Series start at 3.5 lbs.

♦♦ **22850BH-ALT** -

6 point adjustment with removable tool belt, chest D-ring, hip positioning D-rings, and grommet/tongue buckle leg straps, PLUS the added benefit of a (lightweight rigid aluminum) removable positioning/suspension saddle with D-rings

Similar Models:

22870BH-ALT - 22850BH-ALT with quick-connect bayonet leg straps

♦♦ = Quick Ship Item

the NAVIGATOR harness

NAVIGATOR harnesses come standard in BLACK webbing



22030B-BLK -

Constructed of 1 3/4" wide 6000 Lb. webbing, this harness offers maximum comfort for all day use. Buckle connections are fixed so they cannot be taken apart or unthreaded. Wide waist belt with lumbar pad for exceptional support and comfort. Pads on back/shoulder straps provide comfort and support and do not allow webbing to slip off shoulders. Leg pads provide comfort while still allowing adjustability. Rear dorsal attachment point for fall arrest. Front sternum attachment point for connecting to a fall arrest system that limits free fall to 2 feet or less, or for a positioning system. Front waist and side attachment points for positioning. Comes with equipment/gear loops.

Sizes available are xs, s-m, l-xl.

Similar Models:

22070B-BLK - 22030B-BLK with quick-connect bayonet leg straps

STRATOS lanyards

all lanyards come standard in 6' lengths with BLACK webbing and meet performance requirements of ANSI Z359. Other lengths and snap hook combinations are available.



22450AZ

- 6' Pack style energy absorbing lanyard
- 1" wide webbing
- Z74 locking snaps each end
- Similar Model: 22454AZ - Same but with Z136 rebar snap (2 1/2") one end



22450ASZ

- 6' Pack style energy absorbing lanyard
- 1 3/8" wide elastic webbing contracts to 4 1/2"
- Z74 locking snaps each end
- Similar Model: 22454ASZ - Same but with Z136 rebar snap (2 1/2") one end



22480AZ

- 6' Tubular style energy absorbing lanyard
- 1 3/8" wide webbing
- Z74 locking snaps each end
- Similar Model: 22464AZ - Same but with Z136 rebar snap (2 1/2") one end



22480ASZ

- 6' Tubular style energy absorbing lanyard
- 2" wide elastic webbing contracts to 4 1/2"
- Z74 locking snaps each end
- Similar Model: 22464ASZ - Same but with Z136 rebar snap (2 1/2") one end



22456AW

- 6' Pack style energy absorbing lanyard
- Designed to tie-back to itself
- Similar Model: 22446AW - Dual leg 100% tie-off model



22440AZ

- 6' 100% tie-off pack style energy absorbing lanyard
- 1" wide webbing
- Z74 locking snaps each end
- Similar Model: 22444AZ - Same but with Z136 rebar snap (2 1/2") one end



22440ASZ

- 6' 100% tie-off pack style energy absorbing lanyard
- 1 3/8" wide elastic webbing contracts to 4 1/2"
- Z74 locking snaps each end
- Similar Model: 22444ASZ - Same but with Z136 rebar snap (2 1/2") one end



22420AZ

- 6' 100% tie-off tubular style energy absorbing lanyard
- 1 3/8" wide webbing
- Z74 locking snaps each end
- Similar Model: 22424AZ - Same but with Z136 rebar snap (2 1/2") one end



22420ASZ

- 6' 100% tie-off tubular style energy absorbing lanyard
- 2" wide elastic webbing contracts to 4 1/2"
- Z74 locking snaps each end
- Similar Model: 22424ASZ - Same but with Z136 rebar snap (2 1/2") one end



500 series "lightweight" harnesses

maintenance & light duty

Standard features include:

- adjustable shoulder, chest, waist, and leg straps
- integral 1 3/4" waist belt
- sliding back D-ring (keeps fallen worker vertical in suspension)
- light weight, high strength synthetic webbing
- most options, accessories, & color choices available

♦♦ = Quick Ship Item

530 - Full body harness with mating buckle leg straps.

♦♦ **550** - Full body harness with grommet/tongue buckle leg straps, as shown.

550B - 550 with hip positioning D-rings.

570 - Full body harness with super-quick bayonet buckles on the chest and legs.



550



550 (Back)



600 series harnesses

great all-around series

Standard features include:

- adjustable shoulder, chest, and leg straps
- sub-pelvic strap for additional comfort and security
- sliding back D-ring (keeps fallen worker vertical in suspension)
- light weight, high strength synthetic webbing
- most options, accessories, & color choices available

630 - Full body harness with mating buckle leg straps.

630B - 630 with hip positioning D-rings.

650 - Full body harness with grommet/tongue buckle leg straps, as shown.

650B - 650 with hip positioning D-rings.



650 (Back)



650



650B

SIZE	XS	S	M	L	XL	XXL	XXXL
WAIST	28-36	32-40	36-44	40-48	44-52	48-56	52-60

Sizing chart for full body harnesses,
EXCEPT the 600 Lightweight Series.
(All FCP harnesses are rated to 400 lbs.)

600 series harnesses

great all-around, light-weight series

Standard features include:

- 3 point adjustment (chest and leg straps)
- sliding back D-ring (keeps fallen worker vertical in suspension)
- light weight, high strength synthetic webbing
- most options, accessories, & color choices available

Two universal sizes ONLY (S-M and M-XL)

♦♦ = Quick Ship Item

- ♦♦ **631** - Light weight full body harness with mating buckles, as shown.
- ♦♦ **631B** - 631 with hip positioning D-rings, as shown.
- 631D** - 631 with shoulder D-rings.
- ♦♦ **651** - Light weight full body harness with grommet/tongue buckle leg straps, as shown.
- 651B** - 651 with hip positioning D-rings.
- 651D** - 651 with shoulder D-rings.
- 671** - Light weight full body harness (yellow) with super-quick bayonet chest and leg buckles.
- 671PR** - Light weight full body harness (red) with super-quick bayonet chest and leg buckles, and a one piece comfort back & shoulder pad, as shown.

SIZE	XS	S	M	L	XL	XXL	XXXL
WAIST	28-36	32-40	36-44	40-48	44-52	48-56	52-60

SIZING CHART FOR FULL BODY HARNESSES
EXCEPT THE 600 LIGHTWEIGHT SERIES
(All FCP harnesses are rated to 400 lbs.)



631



631B



651



651B



671PR



671PR (Back)



800 series harnesses

Industrial & construction series

Standard features include:

- use in industrial and construction environments
- adjustable shoulder, chest, waist, and leg straps
- sliding back D-ring (keeps fallen worker vertical in suspension)
- removable tool belt, shoulder pads, & 6" body/back pad
- light weight, high strength synthetic webbing
- most options, accessories, & color choices available

♦♦ = Quick Ship Item

830 - Full body harness with mating buckle leg straps, 6" back pad, removable tool belt.

830AB - 830 with shoulder pads and hip positioning D-rings.

850 - Full body harness with grommet/tongue buckle leg straps, 6" back pad, & removable tool belt.

850A - 850 with shoulder pads.

850B - 850 with hip positioning D-rings.

♦♦ **850AB** - 850 with shoulder pads and hip positioning D-rings, as shown.

870 - Full body harness with super-quick bayonet chest and leg buckles, 6" back pad, removable tool belt.

870AB - 870 with shoulder pads and hip positioning D-rings.

870BP - 870 with one piece comfort back & shoulder pad and hip positioning D-rings, as shown.

872 - Female full body harness designed to be form fitting specifically for women. Super-quick bayonet buckles on chest, waist, & legs, 4" comfort back pad, leg pads, and adjustable shoulder straps, as shown.

872B - 872 with hip positioning D-rings.

872AB - 872 with shoulder pads and hip positioning D-rings.

800 series with sub-pelvic strap

833 - Full body harness with mating buckle leg straps, 6" back pad, sub-pelvic strap, removable tool belt.

853 - Full body harness with grommet/tongue buckle leg straps, 6" back pad, removable tool belt, sub-pelvic strap.

853A - 853 with shoulder pads.

853B - 853 with hip positioning D-rings.

853AB - 853 with shoulder pads and hip positioning D-rings, as shown.

800 series option

800PS - Removable saddle for comfort, positioning and suspension applications, as on the 850ABT (page 13). Must be used in conjunction with a full body harness.

SIZE	XS	S	M	L	XL	XXL	XXXL
WAIST	28-36	32-40	36-44	40-48	44-52	48-56	52-60

-sizing chart for full body harnesses

(All FCP harnesses are rated to 400 lbs.)



850AB



850AB (Back)



870BP (Back)



872



853AB



853AB (Back)



800PS



800 series harnesses

tower climber series

Standard features include:

- all the necessities a tower climber would want or need
- adjustable shoulder, chest, waist, and leg straps
- sliding back D-ring (keeps fallen worker vertical in suspension)
- removable tool belt, shoulder pads, & 6" body/back pad
- light weight, high strength synthetic webbing
- most options, accessories, & color choices available

♦♦ = Quick Ship Item

850ABT - 850 (page 12) with shoulder pads, one accessory ring, two accessory snaps, hip positioning D-rings, and two D-rings on a removable positioning saddle for comfort, positioning and suspension applications.

850ABTH - 850ABT with front chest D-ring.

♦♦ **850B-TS** - 850 (page 12) with 6" back pad, hip positioning D-rings, and front center D-ring on waist belt for vertical climbing systems, as shown.

Harness is a quick Ship Item in sizes: M & L

8D150ABT - FCP's Derrick harness is designed for the oil industry and/or the worker who operates on the monkey board. Harness can be worn with or without the removable derrick belt (attaches with mating buckles), and features a 6" comfort waist belt with back D-ring and hip D-rings for positioning, seat sling with D-rings for positioning and to help reduce fatigue, shoulder pads for added comfort, and tongue buckle leg straps for easy donning, as shown.



850ABT



850ABT (Back)



850B-TS



850B-TS Front D-ring (Connected)



8D150ABT
with Derrick
Belt Removed



8D150ABT

ALL
FrenchCreek
Harnesses are rated to
a combined weight of
400 lbs.

SIZE	XS	S	M	L	XL	XXL	XXXL
WAIST	28-36	32-40	36-44	40-48	44-52	48-56	52-60

SIZING CHART FOR FULL BODY HARNESSES
(All FCP harnesses are rated to 400 lbs.)



800 series harnesses

tower climber series

Standard features include:

- all the necessities a tower climber would want or need
- adjustable shoulder, chest, waist, and leg straps
- sliding back D-ring (keeps fallen worker vertical in suspension)
- removable tool belt, shoulder pads, & 6" body/back pad
- light weight, high strength synthetic webbing
- most options, accessories, & color choices available

887PBT - Full body harness with grommet/tongue buckle leg straps, one piece comfort back/shoulder pad, 6" Back Pad, removable tool belt, two accessory rings, fixed rigid positioning saddle, adjustable front center chest D-ring, and hip positioning rings, as shown.

897ABT - Full body harness with grommet/tongue buckle leg straps, 6" Back Pad, one accessory ring, two accessory snaps, removable tool belt, removable positioning saddle, adjustable front center chest D-ring, shoulder pads, and hip positioning rings, as shown.

SIZE	XS	S	M	L	XL	XXL	XXXL
WAIST	28-36	32-40	36-44	40-48	44-52	48-56	52-60

SIZING CHART FOR FULL BODY HARNESSES

(All FCP harnesses are rated to 400 lbs.)



887PBT



887PBT (Back)



897ABT



897ABT (Back)

ALL
FrenchCreek
Harnesses are rated to
a combined weight of
400 lbs.



900 series harnesses

crossover series

Standard features include:

- front crossover style for use in a multitude of applications
- adjustable shoulder and leg straps
- chest D-ring for positioning, suspension, and rescue
- light weight, high strength synthetic webbing
- most options, accessories, & color choices available

930 - Full body harness with back D-ring, chest D-ring, adjustable shoulder straps, and mating buckle leg straps, as shown.

930B - 930 with hip positioning D-rings.

950 - Full body harness with back D-ring, chest D-ring, adjustable shoulder straps, and grommet/tongue buckle leg straps.

950B - 950 with hip positioning D-rings.



930 (Back)



930



specialty series harnesses

specialty series

In many situations, a specialty harness may be necessary for assured safety. These harnesses have a sliding D-ring in the center of the back (keeps worker vertical in suspension), and so much more! Keep in mind that we can customize our designs to suit the specific needs of your job.

552 - Miner's Harness with lamp and battery straps, dual lanyard rings on each shoulder, radio loops, and 152" of reflective material for high visibility, as shown. Sizes: S,M,L,XL.

631LJ - 631 (page 11) with built in life jacket, as shown. Life jacket comes in universal size: S-XXL



552



552 (Back)

Shows reflective material in dark



631LJ



SIZE	XS	S	M	L	XL	XXL	XXXL
WAIST	28-36	32-40	36-44	40-48	44-52	48-56	52-60

SIZING CHART FOR FULL BODY HARNESSSES

(All FCP harnesses are rated to 400 lbs.)

Specialty Harnesses & Lanyards

ARC FLASH CERTIFIED



specialty harness

arc flash certified

AF630KDE - Arc Flash Harness made of heat & flame resistant Kevlar webbing, featuring adjustable die-electric buckles (chest, shoulder, leg), die-electric back sliding D-ring, and flame resistant label cover.

Available Options: Hip D-rings, Shoulder D-rings, Chest D-ring, & Additional Back D-ring w/ Extension Strap.

*This harness has gone through very stringent testing to be Arc Flash CERTIFIED, and meets or exceeds the following applicable standards:

ASTM F887-13

ANSI Z359.1-2007

OSHA 1910.269 & 1926.954



AF630KDE (front)



AF630KDE (back)

specialty lanyard

arc flash certified

AF390AKZ - 6' heat & flame resistant Kevlar lanyard with flame resistant shock-pack, loop for choking to harness D-ring, #Z74 snap hook for anchor connection, and flame resistant label cover.

AF390AKDLZ - 6' dual-leg heat & flame resistant Kevlar lanyard with flame resistant shock-pack, loop for choking to harness D-ring, #Z74 snap hooks for anchor connection, and flame resistant label cover.

Available Options: Single Leg or Double Leg Lanyard w/ choice of connecting snaphook: Z74, Z69, Z136, or 63.

*This lanyard has gone through very stringent testing to be Arc Flash CERTIFIED, and meets or exceeds the following applicable standards:

ASTM F887-13

ANSI Z359.1-2007

OSHA 1910.269 & 1926.954



AF390AKZ



AF390AKDLZ

specialty harnesses & lanyards

welding series

Look no further than FrenchCreek for the best in Welding Harnesses and Lanyards! The following products are standard items in the welding line, but since FCP is a Custom Manufacturer, we can make ANY style harness or lanyard out of heat & flame resistant Kevlar® webbing! (Kevlar® webbing is available in Black only) Standard harness sizing applies.

Welding Harnesses:

530-HOT - 530 (page 10) with heat & flame resistant Kevlar® webbing.

530B-HOT - 530-HOT with hip positioning D-rings.

631-HOT - 631 (page 11) with heat & flame resistant Kevlar® webbing, as shown.

631B-HOT - 631-HOT w/ hip positioning D-rings.

Welding Harness Accessories:

400SC-FR - Retrofit flame resistant shoulder & chest strap covers, as shown. Will fit most harnesses and are wide enough to cover shoulder pads. (harness not included)

Welding Lanyards:

480AK - 480A (page 24) with heat resistant Kevlar® Shock Absorber.

490AK - 490A (page 21) with heat resistant Kevlar® webbing.



480AK



490AK



530-HOT



631-HOT

400SC-FR
(harness not included)

630UT



630UT (Back)



631KUT

specialty harnesses & lanyards

utility industry series

FCP offers some great Harnesses and Lanyards for use in the Utility Industry! The following products are standard items in the Utility line, but since FCP is a Custom Manufacturer, we can make ANY style harness or lanyard suit your needs! Standard harness sizing applies.

Utility Harnesses:

630UT - Utility Harness with no metal above the waist, buckle insulators, and sliding back web loop, as shown.

631KUT - Utility Harness made of heat and flame resistant Kevlar® webbing, featuring a die electric sliding back D-ring (black), along with flame resistant buckle covers, as shown. (Kevlar® webbing is available in Black only)

Utility Lanyards:

347AS-135A - 6' dual leg (100% tie-off), elastic shock absorbing web lanyard w/pack, web loop on shock pack end to choke to attachment point on harness, #135A aluminum snaps (2 1/2" opening) other ends, as shown.

355AZ - 355A Lanyard (page 21) with a 'Z SERIES' compatible snap hook (page 31), as shown.



347AS-135A



355AZ



4000 series work seats

work seat series

Other options are also available, such as the 800PS, 850AB, 850ABT, 850ABTH, 897ABT full body harnesses on pages 12, 13, 14. ♦♦ = Quick Ship Item

- ♦♦4151 - Deluxe work seat, 21"x16", built-in harness with spreader bar and yoke, as shown.
- 4151FS- Foot support that attaches to the 4151, to aid the user with adjustments while in the seat. It is NOT to be used for standing.
- 4153 - Deluxe work seat, 21"x16" (does not include harness), must be used in conjunction with a full body harness.
- ♦♦4154 - Work seat, 12"x24", built-in harness with spreader bar and yoke, as shown.
- 4754 - Work Seat 12"x24", built-in harness with tongue buckle leg straps and removable waist belt.

****SADDLE & WORK SEAT SIZES ARE UNIVERSAL****
(All FCP harnesses, saddles, and seats are rated to 400 lbs.)



4151

4151 (Back)



4153



4154



4754

The TRACKER

3RD GENERATION

Worker
Scan

A FULL LINE OF 'TRACKER SERIES' PRODUCTS: HARNESSES, LANYARDS, & OTHER RELATED SAFETY EQUIPMENT

FrenchCreek's TRACKER technology, in conjunction with WorkerScan, is designed to simplify and maximize management capabilities for Construction Sites, Manufacturing Plants, Oil Rigs, and any other situation that demands permanent positive identification, tracking, and record keeping! The system will improve your companies ability to keep up-to-date records, compliance assurance, increased productivity, decreased theft, less down time during inspections, and more.



RFID system for tracking:

- ◆ Information ◆ Inventory
- ◆ Inspections ◆ OSHA Records

- No special scanner to buy
- Import module for easy integration
- Data is archived for protection
- Provides a complete documentation of equipment history
- Retro-fit any Harness, Lanyard, or other equipment (even tools) with RFID chips!

more TRACKER Info on pgs 5 & 20

Worker
Scan

is a flexible tool for documentation and reporting of equipment and other assets. Once an asset is entered into the system, you have the ability to attach and create safety inspection checklists and run through them when renewing the inspection on a piece of equipment. You can assign equipment to workers or to a jobsite, providing accountability.



part #: ID-RETRO

ID-RETRO packs can be attached to any product:

- Your current harness, lanyard, etc.
- Hard-goods such as Anchors, SRL's, Tripods, etc.
- Any other products that meet your tracking criteria



part #: ID

RFID chips are stitched into actual product:

- Harnesses
- Lanyards (as shown)
- Other webbing and soft-goods

FrenchCreek's 3RD GENERATION RFID tracking system
assists with information, inventory, inspections,
and OSHA record keeping!



1.877.228.9327

FrenchCreek
FALL SAFETY EQUIPMENT
AMERICAN MADE, AMERICAN OWNED

lanyard options & accessories

FrenchCreek offers many available options when ordering lanyards: from custom lengths to a wide variety of snap hooks. We also offer the following options/accessories to keep you safe, give you peace of mind, and facilitate all of your on-the-job duties!

- Choke-Loop** - Two options are available for shock absorbing lanyards to Choke to a harness back D-ring. Please inquire for more information or specific part #'s.
- ① Pack-style with looped end, as shown.
 - ② Internal shock absorber with looped end, as shown.
- 353** - Shock absorber with D-ring one end, snap on the the other end, as shown.
- DT** - All 'pack-style' lanyards can be made for extended free-fall by adding DT to the end of the part #.
- EXT** - Additional D-ring added to the lanyard providing a secondary in-line attachment point for an SRL or other connecting device, as shown. Add 'EXT' to any lanyard part #.
- R** - The U-RES-Q Ladder Pouch can be placed on many lanyards by adding R to the end of the part #. Please inquire for specific possibilities.
- R-RETRO** - U-RES-Q Pouch containing 16' auto-ejecting ladder. Use in-line with lanyard and anchor point, providing means for self-rescue, or stand on the ladder to relieve harness tension! #74N locking snap on one end, D-ring on the other end. (More info on page 26)
- ID** - Tracker Series ID chip built into lanyard webbing, as shown. The RFID Tracker chip, along with WorkerScan software enables you to keep digital records for inventory, inspections, OSHA records, and other pertinent information! Step into the technology age! (More Tracker info on page 19)
- ID-RETRO** - Tracker Series ID chip built into a retro-fit pack that can be attached to all of your equipment, as shown. Other methods of retrofitting are available, please inquire. (More Tracker info on page 19)



The TRACKER

Offering a full line of 'Tracker Series' Products, including Harnesses, Lanyards, & other related safety equipment.



ID-RETRO
(Use it to 'track' your current equipment!)



ID



Choke-Loop ①
w/ external shock pack



Choke-Loop ②
w/ internal shock absorber
(no external shock pack)



353



R-RETRO
Use it inline with your
current lanyard!



EXT
Additional D-ring
for SRL Connection

shock absorbing lanyards

web pack-style

1" synthetic webbing with pack-style shock pack. See pages 31-32 for snap options. Standard length: 6' Available in other lengths.

♦♦ = Quick Ship Item

- ♦♦ **355A** - #74N locking snap at one end, loop on the shock pack end to choke to harness.
- 450A** - #74N locking snaps at each end, as shown.
- 457A-135A** - #74N locking snap one end, #135A aluminum snap (2 1/2" opening) other end.
- 450AD** - #74N locking snaps at each end, and an adjustable D-ring for tying back to lanyard.
- 452A** - #74N locking snap one end, #69 snap (1 3/4" opening) other end.
- 452AN** - #74N locking snap one end, #69N snap (1 3/4" opening) other end.
- 454A** - #74N locking snap one end, #136 snap (2 1/2" opening) other end.
- ♦♦ **490A** - Heavy duty 1 3/4" synthetic webbing, #74N locking snaps each end, as shown.
- 490AK** - Heat & flame resistant Kevlar® lanyard w/ Kevlar® pack, #74N locking snaps each end. (shown on page 17)



shock absorbing lanyards

adjustable web pack-style

1" synthetic webbing with pack-style shock pack. Adjustable lanyards ordered by the longest length and adjust down to approximately half. See pages 31-32 for snap options. Standard length: 6' Available in other lengths.

- 450AB** - #74N locking snaps at each end, as shown.
- 452AB** - #69 snap (1 3/4" opening) other end.
- 452ABN** - #69N snap (1 3/4" opening) other end.
- 454AB** - #74N locking snap one end, #136 snap (2 1/2" opening) other end.
- 457AB-135A** - #74N locking snap one end, #135A aluminum snap (2 1/2" opening) other end.



shock absorbing lanyards

elastic pack-style

1 3/16" synthetic webbing. Stretches to minimize tripping and snagging hazards. See pages 31-32 for snap options. Standard length: 6' Available in other lengths. Standard 6' = 4.5' when relaxed. ♦♦ = Quick Ship Item

- ♦♦ **450AS** - #74N locking snaps at each end, as shown.
- 457AS-135A** - #74N locking snap one end, #135A aluminum snap (2 1/2" opening) other end.
- 452AS** - #74N locking snap one end, #69 snap (1 3/4" opening) other end.
- 452ASN** - #74N locking snap one end, #69N snap (1 3/4" opening) other end.
- 454AS** - #74N locking snap one end, #136 snap (2 1/2" opening) other end, as shown.



snap hook options



* more snap hooks, carabiners, & descriptions on page 31 & 32
For Z-rated snap hooks add a "Z" to the part number

shock absorbing lanyards**rope pack-style**

½" polyblend rope with pack-style shock absorber. See pages 31-32 for snap options. Standard length: 6' Available in other lengths.

400A - #74N locking snaps at each end, as shown.

400AB - Adjustable length, #74N locking snaps at each end.

402A - #74N locking snap one end, #69 snap (1 ¾" opening) other end.

404A - #74N locking snap one end, #136 snap (2 ½" opening) other end.

**shock absorbing lanyards****wire rope pack-style**

7/32" coated to 9/32 vinyl covered wire rope with pack-style shock absorber. See pages 31-32 for snap options. Standard length: 6' Available in other lengths.

470A - #74N locking snaps at each end, as shown.

470AK - Heat resistant Kevlar® pack, #74N locking snaps at each end.

472A - #74N locking snap one end, #69 snap (1 ¾" opening) other end.

474A - #74N locking snap one end, #136 snap (2 ½" opening) other end, as shown.

**shock absorbing lanyards****tubular**

1-3/16 tubular synthetic webbing with internal shock absorbing core. See pages 31-32 for snap options. Available lengths: 4' to 6'.

♦♦ = Quick Ship Item

♦♦ 460A - #74N locking snaps at each end, as shown.

462A - #74N locking snap one end, #69 snap (1 ¾" opening) other end.

462AN - #74N locking snap one end, #69N snap (1 ¾" opening) other end.

464A - #74N locking snap one end, #136 snap (2 ½" opening) other end, as shown.

467A-135A - #74N locking snap one end, #135A aluminum snap (2 ½" opening) other end.

461A-TE - #74N locking snap one end, twisted eye (loop for choking to attachment point on harness) other end, as shown.

462A-TE - #69N snap (1 ¾" opening) one end, twisted eye (loop for choking to attachment point on harness) other end.

464A-TE - #136 snap (2 ½" opening) one end, twisted eye (loop for choking to attachment point on harness) other end.

**snap hook options**

* more snap hooks, carabiners, & descriptions on page 31 & 32
For Z-rated snap hooks add a "Z" to the part number

shock absorbing lanyards

elastic tubular

2" tubular synthetic webbing with internal shock absorbing core. See pages 31-32 for snap options. Available lengths: 4' to 6'

- 460AS** - #74N locking snaps at each end, as shown.
- 462AS** - #74N locking snap one end, #69 snap (1 3/4" opening) other end.
- 462ASN** - #74N locking snap one end, #69N snap (1 3/4" opening) other end.
- 464AS** - #74N locking snap one end, #136 snap (2 1/2" opening) other end.

'lanchor' lanyards

tie-back lanyard & anchor all in one

1 3/8" tubular synthetic webbing with shock pack and internal wear indicating core. See pages 31-32 for snap options. Standard length: 6' Available in other lengths. ♦♦ = Quick Ship Item

- 456AW** - #74N locking snap one end, #63 (5K, 3.6K gate) auto-locking snap other end, as shown.
- 456AW-EXT** - 456AW Lanchor lanyard featuring an added D-ring for applications that call for an additional connection or SRL connection, while the lanyard remains attached to the back D-ring (view lanyard options 'EXT' on page 20).
- ♦♦ **446AW** - dual leg (100% tie-off), #74N locking snap one end, #63 (5K, 3.6K gate) auto-locking snaps other two ends, as shown.

TIE-BACK
WITH YOUR
LANYARD!



color contrasting
double-tuff webbing

shock absorbing lanyards

dual leg web pack-style, 100% tie-off

- 1" synthetic webbing with shock pack. 100% Tie-off. See pages 31-32 for snap options. Standard length: 6' Available in other lengths. ♦♦ = Quick Ship Item
- ♦♦ **440A** - #74N locking snaps on every end, as shown.
 - 442A** - #74N locking snap one end, #69 snap (1 3/4" opening) other two ends.
 - 442AN** - #74N locking snap one end, #69N snap (1 3/4" opening) other two ends.
 - ♦♦ **444A** - #74N locking snap one end, #136 snap (2 1/2" opening) other two ends, as shown.
 - 447A-135A** - #74N locking snap one end, #135A aluminum snap (2 1/2" opening) other two ends.
 - ♦♦ **440ADD** - #74N locking snaps on every end, sliding D-rings on each leg for tying back to lanyard, as shown.
 - 490A-DL** - 1 3/4" shock absorbing web lanyard w/pack, #74N locking snaps on every end.

snap hook
options



* more snap hooks, carabiners, & descriptions on page 31 & 32
For Z-rated snap hooks add a "Z" to the part number



shock absorbing lanyards

adjustable dual leg web pack-style, 100% tie-off

1" synthetic webbing with pack-style shock pack. Adjustable lanyards ordered by the longest length and adjust down to approximately half. See pages 31-32 for snap options. Standard length: 6' Available in other lengths.

440AB - #74N locking snaps on every end, as shown.

442AB - #74N locking snap one end, #69 snap (1 3/4" opening) other two ends.

442ABN - #74N locking snap one end, #69N snap (1 3/4" opening) other two ends.

444AB - #74N locking snap one end, #136 snap (2 1/2" opening) other two ends.

**shock absorbing lanyards**

dual leg elastic pack-style, 100% tie-off

1 3/16" synthetic webbing. Stretches to minimize tripping and snagging hazards. See pages 31-32 for snap options. Standard length: 6' Available in other lengths. Standard 6' = 4.5' when relaxed. ♦♦ = Quick Ship Item

♦♦ **440AS** - #74N locking snaps at each end, as shown.

447AS-135A - #74N locking snap one end, #135A aluminum snap (2 1/2" opening) other two ends.

442AS - #74N locking snap one end, #69 snap (1 3/4" opening) other two ends.

442ASN - #74N locking snap one end, #69N snap (1 3/4" opening) other two ends.

♦♦ **444AS** - #74N locking snap one end, #136 snap (2 1/2" opening) other two ends.

shock absorbing lanyards

dual leg rope & wire rope pack-style, 100% tie-off

1/2" rope or 7/32 coated to 9/32 vinyl covered cable with pack-style shock absorber. 1 3/16" synthetic webbing. See pages 31-32 for snap options. Standard length: 6' Available in other lengths. Standard 6'.

Rope:

430A - #74N locking snaps on every end, as shown.

432AN - #74N locking snap one end, #69N snap (1 3/4" opening) other two ends.

434A - #74N locking snap one end, #136 snap (2 1/2" opening) other two ends.

Wire Rope:

480A - #74N locking snaps on every end, as shown.

482AN - #74N locking snap one end, #69N snap (1 3/4" opening) other two ends.

484A - #74N locking snap one end, #136 snap (2 1/2" opening) other two ends.

**snap hook options**

* more snap hooks, carabiners, & descriptions on page 31 & 32
For Z-rated snap hooks add a "Z" to the part number

shock absorbing lanyards

dual leg tubular, 100% tie-off

1 3/16" tubular synthetic webbing with internal shock absorbing core. 100% tie-off. See pages 31-32 for snap options. Available lengths: 4' to 6'

420A - #74N locking snaps on every end, as shown.

422A - #74N locking snap one end, #69 snap (1 3/4" opening) other two ends.

422AN - #74N locking snap one end, #69N snap (1 3/4" opening) other two ends.

424A - #74N locking snap one end, #136 snap (2 1/2" opening) other two ends.



shock absorbing lanyards

dual leg elastic tubular, 100% tie-off

1 15/16" synthetic webbing. Stretches to minimize tripping and snagging hazards. See pages 31-32 for snap options. Standard length: 6' Available in other lengths. Standard 6' = 4.5' when relaxed.

420AS - #74N locking snaps on every end, as shown.

424AS-135A - #74N locking snap on one end, #135A aluminum snap (2 1/2" opening) other two ends.

422AS - #74N locking snap one end, #69 snap (1 3/4" opening) other two ends.

422ASN - #74N locking snap one end, #69N snap (1 3/4" opening) other two ends.

424AS - #74N locking snap one end, #136 snap (2 1/2" opening) other two ends.

424AS-EXT - 424AS lanyard featuring an added D-ring for applications that call for an additional connection or SRL connection, while the lanyard remains attached to the back D-ring.



non-shock absorbing lanyards

rope, wire rope, & web restraint lanyards

1" synthetic webbing or 7/32 coated to 9/32 vinyl covered cable. Non-shock absorbing (positioning only). See pages 31-32 for snap options. Standard length: 6' Available in other lengths

400 - rope lanyard with #74N locking snaps at each end, as shown.

402 - rope lanyard with #74N locking snap one end, #69 snap (1 3/4" opening) other end.

404 - rope lanyard with #74N locking snap one end, #136 snap (2 1/2" opening) other end.

450 - web lanyard with #74N locking snaps at each end, as shown.

450B - adjustable length web lanyard with #74N locking snaps at each end.

452 - web lanyard with #74N locking snap one end, #69 snap (1 3/4" opening) other end.

470 - vinyl coated wire rope lanyard with #74N locking snaps at each end, as shown.

snap hook options



* more snap hooks, carabiners, & descriptions on page 31 & 32
For Z-rated snap hooks add a "Z" to the part number



Suspension Trauma is a REAL condition that can occur when a worker is suspended, even for a short amount of time. The U-RES-Q can relieve 100% of the harness tension!

The U-RES-Q

A FULL LINE OF U-RES-Q PRODUCTS, INCLUDING A RETRO-FIT PACK FOR YOUR CURRENT LANYARD - PATENT PENDING

Please inquire for more lanyards offering the U-RES-Q, that may not be shown.

lanyards - U-RES-Q



SELF
RESCUE!

AUTO-
EJECTING
WEB LADDER!



- **R444A** - 6' dual leg (100% tie-off) shock absorbing web lanyard with #74N locking snap one end, #136 snaps (2 1/2" opening), and U-RES-Q pouches (2 total) other two ends.
- **R450A** - 6' shock absorbing web lanyard w/ pack, #74N locking snaps at each end, U-RES-Q built in, as shown.
- **R460A** - 6' tubular shock absorbing web lanyard with #74N locking snaps at each end, U-RES-Q built in, as shown.
- **R460AT** - Same as R460A, with tether connecting U-RES-Q ladder to harness connector.
- **R490A** - 6' x 1 3/4" shock absorbing web lanyard w/ pack, #74N locking snaps at each end, U-RES-Q built in, as shown.
- **R-RETRO** - Retro fit any lanyard with this U-RES-Q pouch, #74 locking snap one end, D-ring other end, as shown. Use in-line with lanyard & anchor point.
- **R-RESC** - U-RES-Q pouch w/ velcro bottom containing a 20' rescue ladder and #63 captive eye carabiner. This is a manually ejected model for assisted rescue, and DOES NOT auto-eject.

The U-RES-Q is available as an option to many FrenchCreek shock absorbing lanyards. A standard shock absorbing lanyard may save you in the event of a fall, but remaining suspended after the fall is another problem all together. It is common knowledge in the fall protection industry that every minute in suspension, after a fall, is extremely crucial! If even the slightest of falls should happen to occur, the light-weight pouch releases into rescue mode by automatically ejecting a high strength, 16' synthetic rescue ladder! At that point the worker can climb back to the work platform, or simply stand on the ladder to relieve pressure, increase blood flow, and ensure enough time for emergency response. The U-RES-Q is the most reliable, most secure product in alleviating Suspension Trauma. It relieves the leg harness tension caused by suspension, & is an option you can't afford to be without! The U-RES-Q is to be used in conjunction with a full body harness and a complete fall prevention/rescue program. It is also available as an 'add-on' option that can be utilized in-line with any standard shock absorbing lanyard and anchor point. To order "Z SERIES" compatible products (that meet ANSI Z359.1-2007) simply add a 'Z' to the end of the product # in which you are ordering.

rebar assemblies

positioning & restraint systems

These FrenchCreek positioning and restraint lanyards are used in situations to limit free fall distances to 2' or less. They quickly connect directly to rebar and other construction forms and structures. Choose between chain or webbing, non-swivel and swivel. **** = Quick Ship Item**

***NOTE: We can customize any assembly to your needs & specific applications. Please inquire.**

322-W - Web positioning assembly, #69 (1 3/4" opening) snap, no swivel, and two #74N locking snaps.

322-WS - Web positioning assembly, #69 (1 3/4" opening) snap, swivel, and two #74N locking snaps.

**** 324-C** - Chain positioning assembly, 12 links, #136 (2 1/2" opening) snap, no swivel, and two #74N locking snaps, as shown.

**** 324-CS** - Chain positioning assembly, 12 links, #136 (2 1/2" opening) snap, swivel, and two #74N locking snaps, as shown.

324-W - Web positioning assembly, #136 (2 1/2" opening) snap, no swivel, and two #74N locking snaps, as shown.

324-WS - Web positioning assembly, #136 (2 1/2" opening) snap, swivel, and two #74N locking snaps.



Chain positioning assembly in use.

snap hook options



* more snap hooks, carabiners, & descriptions on page 31 & 32
For Z-rated snap hooks add a "Z" to the part number

13' Compact Self-Retracting Lifeline



#74N



#Z74



#136



#Z136



#62



#354-4



swivel only



#49



MADE IN
U.S.A.

RENEGADE

SELF-RETRACTING LIFELINE
by: FrenchCreek Production

** All Renegade SRL's come with Top Swivel **

ANSI A10.32	♦♦ = Quick Ship Item		
Model Number	Housing/Swivel Connector	Lifeline Connector	Weight (lbs.)
RG1-13-0	Swivel Only	#74N 3/4" steel locking snap	3.80
♦♦ RG3-13-0	#354-4 1" opening, steel carabiner	#74N 3/4" steel locking snap	4.50
RG0-13-0	#74N 3/4" steel locking snap	#74N 3/4" steel locking snap	4.40
RG4-13-0	#136 2 1/4" steel locking rebar snap	#74N 3/4" steel locking snap	5.15
RG8-13-0	#62 2" Steel locking carabiner	#74N 3/4" steel locking snap	5.60
RG3-13-05	#354-4 1" opening, steel carabiner	#49 3/4" steel swivel locking snap	5.00
RG0-13-4	#74N 3/4" steel locking snap	#136 2 1/2" steel locking rebar snap	5.15

* Other connector options are available. Please contact FCP for more information.

ANSI Z359	♦♦ = Quick Ship Item		
Model Number	Housing/Swivel Connector	Lifeline Connector	Weight (lbs.)
♦♦ RG3-13-0Z	#354-4 1" opening, steel carabiner	#Z74 3/4" steel locking snap	4.75
RG0Z-13-0Z	#Z74 3/4" steel locking snap	#Z74 3/4" steel locking snap	4.90
RG4Z-13-0Z	#Z136 2 1/2" steel locking rebar snap	#Z74 3/4" steel locking snap	5.80
RG8-13-0Z	#62 2" Steel locking carabiner	#Z74 3/4" steel locking snap	5.85
RG0Z-13-4Z	#Z74 3/4" steel locking snap	#Z136 2 1/2" steel locking rebar snap	5.80

* Other connector options are available. Please contact FCP for more information.

RENEGADE Toughness

Renegade series American-made SRL's provide the durability and confidence expected by professionals. With 13 ft. of working length and quick fall-arrest capability measured in inches, the Renegade will never let you down.

RENEGADE Durability

- Corrosion resistant housing made of aluminum and stainless steel, including a stainless steel top swivel
- High Strength wear-resistant webbing allows for 13 feet of capacity
- A variety of 5,000 pound connectors available, reducing the cost of ownership and allowing for customization
- Capacity of 400 pounds

RENEGADE Safety Performance

- No annual factory recertification required
- Double-inertia, high-strength stainless steel braking system arrests free falls within inches
- Visual impact indicator warns that the unit has experienced fall-arrest forces and must be removed from service
- Compact energy absorber minimizes fall-arrest forces
- Used in commercial & residential construction, manufacturing, refinery maintenance, utilities, and other industries

ROGUE

SELF-RETRACTING LIFELINE

8' sub-compact Self-Retracting Lifeline



self retracting lifelines - ROGUE

ROGUE PART NUMBERS & ORDERING OPTIONS

ROGUE SRL Single-Leg Model Selections

Single-Leg Model #	Housing/Swivel Connector	Lifeline Connector	Weight (lbs)
MRG3-0Z	#354-4 1" opening, steel carabiner	#Z74 3/4" steel locking snap	3.20
MRG3-0SZ	#354-4 1" opening, steel carabiner	#RL-28 3/4" steel swivel locking snap	3.45
MRG3-4Z	#354-4 1" opening, steel carabiner	#Z136 2 1/2" steel locking rebar snap	4.10
MRG0Z-0Z	#Z74 3/4" steel locking snap	#Z74 3/4" steel locking snap	3.35
MRG0Z-4Z	#Z74 3/4" steel locking snap	#Z136 2 1/2" steel locking rebar snap	4.25
MRG3A-6A	#354-2A 7/8" aluminum carabiner	#63A 3/4" aluminum captive-eye carabiner	2.30
MRG3A-8A	#354-2A 7/8" aluminum carabiner	#62A 2" aluminum locking carabiner	2.80
MRG4Z-0SZ	#Z136 2 1/2" steel locking rebar snap	#RL-28 3/4" steel swivel locking snap	4.50
MRG1-0Z	Swivel Anchor Loop Only	#Z74 3/4" steel locking snap	2.50
MRG1-0SZ	Swivel Anchor Loop Only	#RL-28 3/4" steel swivel locking snap	2.75
MRG1-4Z	Swivel Anchor Loop Only	#Z136 2 1/2" steel locking rebar snap	3.40
MRGCM-0Z	Cab Mount	#Z74 3/4" steel locking snap	3.20
MRGCM-0SZ	Cab Mount	#RL-28 3/4" steel swivel locking snap	3.40

* If you are interested in a snap hook combination not listed, please inquire.

♦♦ = Quick Ship Item

ROGUE SRL Dual-Leg Model Selections

Dual-Leg Model #	Housing/Swivel Connector	Lifeline Connector	Weight (lbs)
♦♦ M2RG-0Z	#354-6TL 1/2" steel triple-lock carabiner	#Z74 3/4" steel locking snap	5.45
M2RG-0SZ	#354-6TL 1/2" steel triple-lock carabiner	#RL-28 3/4" steel swivel locking snap	5.95
♦♦ M2RG-4Z	#354-6TL 1/2" steel triple-lock carabiner	#Z136 2 1/2" steel locking rebar snap	7.25
M2RG-6A	#354-6TL 1/2" steel triple-lock carabiner	#63A 3/4" aluminum captive-eye carabiner	4.45
M2RG-8A	#354-6TL 1/2" steel triple-lock carabiner	#62A 2" aluminum locking carabiner	5.45

* To order RFID TRACKER capable units, simply add "ID" to the part number.

ROGUE Features

Swivel Anchor Loop limits twisting, Impact Indicator tears away for visual inspection, Short Fall Arrest Activation, Web Shock-pack tear away to reduce fall forces, 400 lb weight capacity, TRACKER capable, numerous options available.

ROGUE Durability

- High-strength, light weight, corrosion resistant housing, including a stainless steel top swivel
- High Strength wear-resistant webbing allows for 8 feet of capacity
- A variety of 5,000 pound connectors available, reducing the cost of ownership and allowing for customization
- Single or Double-leg connection, meets or exceeds OSHA & ANSI industry standards.

ROGUE Safety Performance

- No annual factory recertification required
- Double-inertia, high-strength stainless steel braking system arrests free falls within inches
- Visual impact indicator warns that the unit has experienced fall-arrest forces and must be removed from service
- Compact energy absorber minimizes fall-arrest forces
- Used in commercial & residential construction, manufacturing, refinery maintenance, utilities, and other industries

self retracting lifelines

Retractable lifelines provide extreme durability with high mobility! These units offer an extended range of movement, zero slack to eliminate tripping hazards, and a centrifugal braking system that engages at the slightest of falls! ** = Quick Ship Item

- ** 459 - 8' retractable web lanyard. A carabiner is included with every unit for anchorage attachment, as shown.

RL25A Series: Durable, lightweight, cast aluminum housing featuring a dual internal inertia braking system, external deceleration pack for ease of inspection, #354-2Z carabiner for anchoring, and choice of lifeline material.

- ** RL25AGZ - 25' of galvanized wire rope, as shown.
 RL25ASZ - 25' of stainless steel wire rope.
 RL25ATZ - 25' of Technora® synthetic rope.

RL30 / RL50 Series: Super-strong cast aluminum housing featuring a dual internal inertia braking system, internal deceleration braking system, swivel impact indicating snap hook, #354-4 carabiner for anchoring, and choice of lifeline material.

- RL30GZ - 30' of galvanized wire rope, as shown.
 RL30SSZ - 30' of stainless steel wire rope.
 RL30TZ - 30' of Technora® synthetic rope.

- ** RL50GZ - 50' of galvanized wire rope, as shown.
 RL50SSZ - 50' of stainless steel wire rope.
 RL50TZ - 50' of Technora® synthetic rope.

100' Series: Super-strong cast aluminum housing featuring a dual internal inertia braking system, internal deceleration braking system, swivel impact indicating snap hook, #354-4 carabiner for anchoring, and choice of lifeline material.

- RL100GZ - 100' of galvanized wire rope, as shown.
 RL100SSZ - 100' of stainless steel wire rope.
 RL100TZ - 100' of Technora® synthetic rope.



459



RL25AGZ

WE ALSO
 PROVIDE REPAIRS
 & RECERTIFICATION!

RL30GZ
&
RL50GZ

RL100GZ

Safety always comes first!

FCP's self retracting lifelines are engineered to provide extreme durability, reliability, & the performance necessary for any work environment. In the event of a fall, FCP's SRL's are designed to lock up within 24", reducing impact forces on your body. We also provide REPAIRS & RECERTIFICATION on our mechanical units. Providing a tremendously long service life. Because your life is on the line!

TECHNICAL SPECIFICATIONS

MODEL #	459	RL25AGZ	RL30GZ	RL50GZ	FCP2005-100GZ
Working Length, feet	8'	25'	30'	50'	100'
Work Load Capacity, lbs.	400 lbs	310 lbs	310 lbs	310 lbs	310 lbs
Housing Material	Synthetic	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum
Housing Size (w,h,d)	4"x3"x4"	7"x8"x4"	9"x14"x5"	9"x14"x5"	20"x13"x6"
Total Weight, lbs.	2.4 lbs	10.5 lbs	18 lbs	20 lbs	38 lbs
Arrest Force, lbs.	900 lbs	900 lbs	900 lbs	900 lbs	900 lbs

snap hooks & carabiners

steel

FrenchCreek offers an extensive supply of top quality one-handed operational, self-closing, auto-locking snap hooks and carabiners. Steel hardware is plated to meet all regulatory requirements and **"Z SERIES"** hardware meets the newest version of the ANSI Z359 standards. To order lanyards with **"Z SERIES"** rated hardware, simply add a Z to the part number.

(More "Z SERIES" info can be found on page 32)



274

- Steel
- Twin 3/4" gate
- Locking spreader snap



RL-28

- Steel, swivel
- 3/4" gate
- Locking snap w/ Impact Indicator
- Meets ANSI Z359
- **"Z SERIES"**



49

- Steel, swivel
- 3/4" gate
- Locking snap
- Meets ANSI Z359
- **"Z SERIES"**



74N

- Steel
- 3/4" gate
- Locking snap



Z74

- Steel
- 3.6K, 3/4" gate
- Locking snap
- Meets ANSI Z359
- **"Z SERIES"**



69

- Steel
- 1 3/4" gate
- Locking rebar snap



69N

- Steel
- 1 3/4" gate
- Locking rebar snap
- Meets ANSI Z359
- **"Z SERIES"**



136

- Steel
- 2 1/2" gate
- Locking rebar snap
- Fits many concrete forms!



Z136

- Steel
- 3.6K, 2 1/2" gate
- Locking rebar snap
- Meets ANSI Z359
- **"Z SERIES"**



62

- Steel
- 3.6K, 2" gate
- Twist Lock Scaffold Hook
- Meets ANSI Z359
- **"Z SERIES"**



62R

- Steel
- 3.6K, 2" gate
- Twist Lock Scaffold Hook
- Meets ANSI Z359
- **"Z SERIES"**



63

- Steel
- 3/4" gate
- Twist lock snap
- 5K gate capacity
- Meets ANSI Z359
- **"Z SERIES"**



65

- Steel
- 3.6K, 1 3/4" gate
- Twist Lock Carabiner
- Off-set Gate
- With or without pin
- Meets ANSI Z359
- **"Z SERIES"**



354-1

- Steel
- 1/2" gate
- Twist lock carabiner



354-2Z

- Steel
- 3.6K, 1" gate
- Twist lock carabiner
- Meets ANSI Z359
- **"Z SERIES"**



354-4

- Steel
- 1" gate
- Twist lock carabiner
- Available in Stainless Steel (part # 354-4SS)
- Meets ANSI Z359
- **"Z SERIES"**



354-5

- Steel
- 3/4" gate
- Twist lock carabiner



354-6TL

- Steel
- 3/4" gate
- Twist lock carabiner
- Meets ANSI Z359
- **"Z SERIES"**

snap hooks & carabiners

aluminum

**175**

- ♦ Aluminum
- ♦ 1" gate
- ♦ Locking snap

**354-2A**

- ♦ Aluminum
- ♦ 7/8" gate
- ♦ Twist lock carabiner
- ♦ Meets ANSI Z359
- ♦ **"Z SERIES"**

**354-3A**

- ♦ Aluminum
- ♦ 7/8" gate
- ♦ Twist lock carabiner
- ♦ Meets ANSI Z359
- ♦ **"Z SERIES"**

**135A**

- ♦ Aluminum
- ♦ 2 1/2" gate
- ♦ Locking rebar snap

**62A**

- ♦ Aluminum
- ♦ 2" gate
- ♦ Twist Lock Scaffold Hook
- ♦ Meets ANSI Z359
- ♦ **"Z SERIES"**

**63A**

- ♦ Aluminum
- ♦ 7/8" gate
- ♦ Twist lock carabiner
- ♦ Meets ANSI Z359
- ♦ **"Z SERIES"**

**'z series' snap hooks & carabiners**

ANSI Z359 compliant hardware

FrenchCreek offers a full line of ANSI Z359 compliant hardware. One of the major updates to the Z359 Standard is the new gate strength requirements, which requires snap hooks and carabiners meet the following conditions:

- Gate Face must withstand a load of 3,600 lbs. (increased from 220 lbs.)
- Side of Gate must withstand a load of 3,600 lbs. (increased from 350 lbs.)
- Minor Axis of snap hooks or carabiners (except ones with captive eyes) must withstand a load of 3,600 lbs.
- Tensile load for snap hooks and carabiners must withstand a load of 5,000 lbs.
- All **"Z SERIES"** hardware shown on page 31 & 32.
- Simply add a "Z" to the part number you are ordering! (any product with snap hook possibilities)



**SIMPLY ADD A "Z"
TO THE PRODUCT #
YOU ARE ORDERING!**

lifelines

FrenchCreek lifelines are constructed of a 5/8" 3-strand polyblend synthetic rope, designed for excellent wear, strength, and limited stretch. **Standard lengths are available in 25' increments. Custom lengths are available upon request.**

♦♦ = Quick Ship Item

410 - 5/8" 3-strand polyblend synthetic lifeline with #74N locking snaps at each end. When ordering, final product #'s are designated by length: 25', 50', 100', 200', etc.

For example:

♦♦ **410-25** - 410, 25' in length.

♦♦ **410-50** - 410, 50' in length.

♦♦ **410-100** - 410, 100' in length.

410-200 - 410, 200' in length.

411 - 5/8" 3-strand polyblend synthetic lifeline with #74N locking snap at one end, thimble other end. When ordering, final product #'s are designated by length: 25', 50', 100', 200', etc.

For example:

♦♦ **411-25** - 411, 25' in length.

♦♦ **411-50** - 411, 50' in length.

♦♦ **411-100** - 411, 100' in length.

411-200 - 411, 200' in length.

121-1T - 5/8" 3-strand polyblend synthetic lifeline with thimble on one end. When ordering, final product #'s are designated by length: 25', 50', 100', 200', etc.

For example:

121-1T-25 - 121-1T, 25' in length.

121-1T-200 - 121-1T, 200' in length.

121-1S - 5/8" 3-strand polyblend synthetic lifeline with snap on one end. When ordering, final product #'s are designated by length: 25', 50', 100', 200', etc.

For example:

121-1S-25 - 121-1S, 25' in length.


121-1S-200 - 121-1S, 200' in length.

121-2T - 5/8" 3-strand polyblend synthetic lifeline with thimbles on both ends. When ordering, final product #'s are designated by length: 25', 50', 100', 200', etc.

For example:

121-2T-25 - 121-2T, 25' in length.

121-2T-200 - 121-2T, 200' in length.

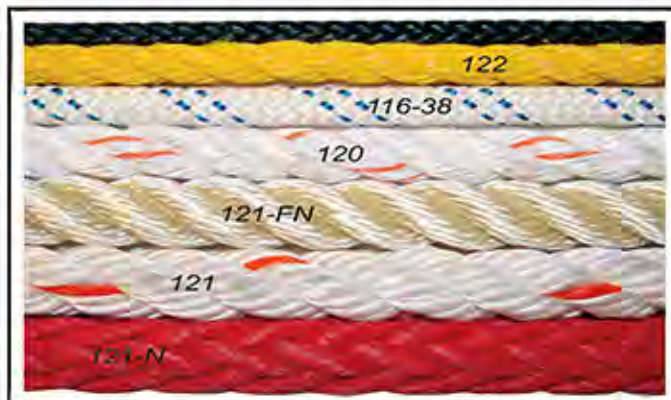

rope & rope accessories

Order all of your rope from FCP! We can supply you with exactly what you need for all on-the-job applications! Don't see exactly what you're looking for, please inquire.

116-38 - 3/8" Kernmantle® rope, as shown.

116-716 - 7/16" Kernmantle® rope.

116-12 - 1/2" Kernmantle® rope.

120 - 1/2" 3-strand polyblend synthetic rope, as shown.

121 - 5/8" 3-strand polyblend synthetic rope, as shown.

121-N - 5/8" 12-strand polyester rope, as shown.

121-FN - 5/8" filament nylon rope, as shown.

125-FN - 3/4" filament nylon rope.

122 - 3/8" polypropylene rope, as shown.

123 - 1/2" polypropylene rope.

RL-27T12 - 3/16" 12-strand Technora® rope, as shown.

121CW - 5 lb. flexible counterweight bag to keep lifeline tensioned, to prevent excess slack, and facilitate performance of a trailing rope grab.

121RP - 20" long 4 ply 600 denier polyester rope protector with velcro and tie strap closure. For vertical or horizontal use.

♦♦ **1710** - Aluminum rope termination plate for 5/8" rope lifelines without the need for knots, splicing, or crimping. (Plate ONLY - does not come with rope)



121CW



121-RP



1710

rope grabs

rope & wire rope

FrenchCreek offers a comprehensive line of durable, user friendly rope grabs & wire rope grabs. (Lifelines can be purchased separately, and are shown on page 33.) The grabs are available in two different styles:

Manual Rope grab:

Worker manually slides the device to the desired position on the rope and releases it, locking it on the lifeline and providing the worker with fall protection. Great for sloped roofs because they lock in place once positioned.

Trailing Rope grab:

Little or no user positioning needed. Trailing grabs move up and down the lifeline with the worker, locking only when a fall occurs.

FrenchCreek strongly recommends that lanyard length not exceed 3' when in use with a rope grab. This aids OSHA compliance and helps to reduce free-fall distances.


Rope Grabs:

♦♦ = Quick Ship Item

- ♦♦ 1201 - Stainless steel trailing rope grab for use on 5/8" and 3/4" 3-strand synthetic rope. Attachable, detachable anywhere on lifeline, as shown.
- ♦♦ 1201N - Stainless steel trailing rope grab for use on 5/8" 3-strand synthetic rope. Attachable, detachable anywhere on lifeline, as shown
- 1202N-3 - 1201N with 3' lanyard, #74N locking snap on end.
- ♦♦ 1202AN-3 - 1201N with 3' shock absorbing lanyard, #74N locking snap on end.
- 1202-3 - 1201 with 3' lanyard, #74N locking snap on end.
- 1202A-3 - 1201 with 3' shock absorbing lanyard, #74N locking snap on end, as shown.
- ♦♦ 1261 - Trailing rope grab for use on 5/8" 3-strand synthetic rope. Comes with "gravity washer" to prevent user from installing incorrectly. Attachable, detachable anywhere on lifeline, as shown.
- 1262-3 - 1261 with 3' lanyard, #74N locking snap on end.
- 1262A-3 - 1261 with 3' shock absorbing lanyard, #74N locking snap on end.
- 1352A-3 - Manual Rope grab, plated steel for use on 5/8" 3-strand synthetic rope. Not attachable, detachable anywhere on lifeline, as shown.

Wire Rope Grabs:

- ♦♦ 1401-38 - Stainless steel trailing cable grab for use with 3/8" and 5/16" wire rope, as shown.
- 1401A-38 - Stainless steel trailing cable grab for 3/8" and 5/16" wire rope, shock absorber, and carabiner.

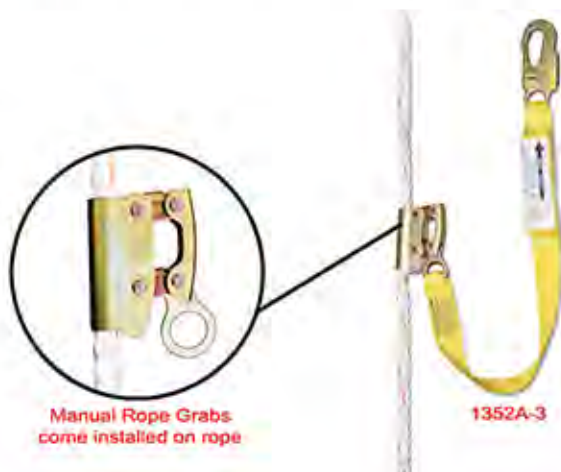

roofer's kit**rk deluxe series kit**

FCP Roofing Kits come ready to install. A variety of roof anchors and multiple lengths of kits are available to fit many residential and industrial applications.

RK Deluxe Roofer's Kits include:

MRA-R double-plate roof anchor (page 36), 410 5/8" lifeline (page 33) with self-locking snaps on each end, 1202AN-3 stainless trailing rope grab with 3' shock absorbing lanyard (page 34), 631 full body harness (page 11), carry bag, and instruction manual, as shown.

RK-25 - 25' working length kit.

RK-50 - 50' working length kit, as shown.

RK-100 - 100' working length kit.

**roofer's kit****rkb series kit**

RKB Kit configurations are based upon the desired roof anchor and length of rope necessary to fit the application. Components shown to the left are included in all RKB Kits. Choice of anchor and corresponding Kit numbers are shown below.

RKB Kits include:

Desired roof anchor (below), 411 5/8" lifeline with a self-locking snap on one end and an eye thimble on the other end (page 33), 1352A-3 manual rope grab with 3' shock absorbing lanyard (page 34), 631 full body harness (page 11), storage bucket with lid, and instruction manual, as shown.

**Want a bag instead of a bucket?**

Order "RKA Kits" instead of RKB! All other order info remains the same. Please inquire.

♦♦ = Quick Ship Item

RKB-1720 Kit

Six (6) 1720 Anchors Included.
(More info on page 36)

RKB-1720-25 - 25' kit.

RKB-1720-50 - 50' kit.

Other lengths available upon request.

**RKB-1725 Kit**

One (1) 1725 Anchor Included.
(More info on page 36)

RKB-1725-25 - 25' kit.

RKB-1725-50 - 50' kit.

Other lengths available upon request.



Select an Anchor... order the kit!

RKB-MRA Kit

One (1) MRA-R1 Anchor Included.
(More info on page 36)

RKB-MRA-25 - 25' kit.

RKB-MRA-50 - 50' kit.

Other lengths available upon request.

**RKB-1715 Kit**

One (1) 1715 Anchor Included.
(More info on page 36)

RKB-1715-25 - 25' kit.

♦♦ **RKB-1715-50** - 50' kit.

Other lengths available upon request.



roof anchors

** = Quick Ship Item

- ** MRA-R1** - Removable/reusable roof anchor (single plate) with screws, as shown.
- MRA-R** - Removable/reusable roof anchor (double plate) with screws, as shown.
- ** 1715** - Removable/reusable roof anchor with single D-ring attachment, as shown. Nails are included.
- ** 1720** - Disposable roof anchor bracket for use with carabiner, as shown. Nails are included.
- 1725** - Disposable roof anchor with single D-ring attachment, as shown. Nails are included.
- ** 1730** - Permanent roof anchor with single D-ring attachment, as shown. Nails are included.
- ** 1740** - Permanent roof anchor with double D-ring attachment. Nails are included.
- 1760** - Permanent structure, post anchor w/ a 360° swivel D-ring connector. (shown on page 38 & 39)



MRA-R1



1730



1740



MRA-R



1715



1720



1725

Rooftract™

Roof Retractable Systems

- 1791** - Roof mount assembly for variable pitch steel, metal or wood roofs. Mounts anywhere on the roof, rotates 360° for maximum maneuverability and safety, comes as anchor ONLY. Retractable lifeline purchased separately, choose from: RL25, RL30, or RL50 Series retracts (page 30). Mounting hardware included.
- 1792** - Roof mount assembly for variable pitch standing seam metal roofs. Mounts anywhere on the roof, rotates 360° for maximum maneuverability and safety, comes as anchor ONLY in 12"-18" or 24"-36" sizes. Retractable lifeline purchased separately, choose from: RL25, RL30, or RL50 Series retracts (page 30). Mounting hardware included.

1791 Anchor
shown w/
RL50G SRL installed
(purchased separately)



1792 Anchor
shown w/
RL50G SRL installed
(purchased separately)

tie off strap anchors

FCP Tie-off strap anchors typically choke (pass-thru itself creating a loop) around I-beams or other structures (except 470-VC516-4) to form a secure attachment point for lanyards or other connecting devices. ** = Quick Ship Item

1100 Web Series: (1 3/4" high strength nylon webbing unless noted)

1122HD - 22" single D-ring tie-off strap made of 1" nylon webbing, as shown.

** **1124** - 2' single D-ring tie-off strap.

1124K - 2' single D-ring Kevlar tie-off strap, as shown.

** **1136** - 3' single D-ring tie-off strap, as shown.

1136K - 3' single D-ring Kevlar tie-off strap.

1148 - 4' single D-ring tie-off strap.

1160 - 5' single D-ring tie-off strap.

1172 - 6' single D-ring tie-off strap.

1196 - 8' single D-ring tie-off strap.

1300 Web Series: (1 3/4" high strength nylon webbing unless noted)

** **1324** - 2' double D-ring tie-off strap.

** **1336** - 3' double D-ring tie-off strap, as shown.

** **1348** - 4' double D-ring tie-off strap.

** **1372** - 6' double D-ring tie-off strap.

1396 - 8' double D-ring tie-off strap.

1300 WP Web Series: (1 3/4" high strength nylon w/ 3" wear pad)

1324-WP - 2' double D-ring tie-off strap with 3" wear pad.

1336-WP - 3' double D-ring tie-off strap with 3" wear pad, as shown.

1348-WP - 4' double D-ring tie-off strap with 3" wear pad.

** **1372-WP** - 6' double D-ring tie-off strap with 3" wear pad.

Wire Rope Series:

470-VC516-4 - 4' vinyl coated wire rope (5/16") tie-off extension strap, #74N locking snap one end, 3" OD steel O-ring for tie-off other end.

1636VC-516 - 3' vinyl coated wire rope (5/16"), 3" OD steel O-ring one end, 4" OD steel O-ring other end. Designed to choke one ring through the other.

1636 - 3' stainless steel wire rope (3/8"), 3" OD steel O-ring one end, 4" OD steel O-ring other end. Designed to choke one ring through the other.

1636G - 3' galvanized wire rope (3/8"), 3" OD steel O-ring one end, 4" OD steel O-ring other end. Designed to choke one ring through the other.

*All tie-off straps can be manufactured to any length.



1636VC-516



470-VC516-4



106

beam trolley & beam anchor

106 - FCP's Beam Trolley slides along the beam with the worker for maximum mobility. The flange width is adjustable from 3"-8", the maximum flange thickness is 1", and the minimum radius bend is 2'. The trolley provides a maximum capacity rating of 400 lbs., as shown.

1700 - Adjustable sliding beam anchor for 3 1/2" to 12" wide flange, up to 1 1/4" thick. Can be used on the top or bottom of I-beam, and will slide along the beam as the worker moves. The unit features double stainless springs, double action one-handed quick release latches, double-toothed latches, a centered D-ring for a smoother slide, and an ultimate tensile rating of 5,000 lbs.

1702 - Adjustable sliding beam anchor for 3 1/2" to 12" wide flange, up to 1 1/4" thick. Can be used on the top or bottom of I-beam, and will slide along the beam as the worker moves. The unit features a quick release latch for one handed operation, and a floating D-ring. It has an ultimate tensile rating of 5,000 lbs.



1700



1702

FCP's steel anchorage connectors are removable, reusable, and are made to be mounted on solid steel structures and/or steel I-beams. ♦♦ = Quick Ship Item

- ♦♦ **1550** - D-bolt anchor for up to 2 1/2" working thickness includes a 5/8" bolt assembly, as shown.
- ♦♦ **1701** - Bolt-on Anchor Plate w/ D-ring, as shown.
- 1701-CSW** - Weld-on carbon steel Anchor Plate w/ D-ring.
- 1701-SSW** - Weld-on stainless steel Anchor Plate w/ D-ring.
- 1760-12S-S** - Post anchor w/ 360° swivel D-ring. Comes with mounting hardware. Also available in 18" model.
- ♦♦ **1769** - Spring action Girder Anchor offers one-handed operation for a variety of applications. Fits 3/4" - 1 1/4" hole diameter, maximum 1" thick material, as shown.
- 1775-S3** - 1/4" stainless steel anchor plate, six ply webbing, plated steel D-ring, and 3" bolt, washers & nut for steel applications.



1701




1701-CSW



1550



1769

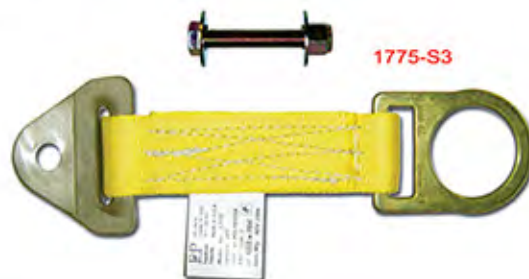1760-12S-S
Swivels 360°

1775-S3

1769 Girder Anchor in use.



anchorage connectors

concrete series

FCP's disposable concrete anchor straps (1124C & 1124CND) are designed to provide temporary anchorage in concrete. The 1 3/4" wide abrasion resistant webbing and forged steel D-ring are rated at 5,000 lbs. ♦♦ = Quick Ship Item

1124C - 2' concrete anchor strap with D-ring, as shown.

1124CND - 2' concrete anchor strap with web loop, as shown.

1136C - 3' concrete anchor strap with D-ring.

1136CND - 3' concrete anchor strap with web loop.

1148C - 4' concrete anchor strap with D-ring.

1148CND - 4' concrete anchor strap with web loop.

♦♦ **TC100** - Concrete anchor that is placed through a hole in the concrete floor, providing workers on a lower level an over-head anchor. Anchor is as shown.

1760-12S-C - Post anchor w/ 360° swivel D-ring. Comes with mounting hardware. Also available in 18" model.

♦♦ **1770** - 3/4" portable/reusable concrete hole anchor, rated to 5,000 lbs. Can be used for vertical and overhead concrete applications.


1775 - Concrete anchor with stainless steel plate, six ply webbing, plated steel D-ring, & one concrete bolt.

1775B10 - 10 pack of disposable concrete anchor bolts.

1775B20 - 20 pack of disposable concrete anchor bolts.

1780-24 - 24" ColumnCrete Anchor - reusable two person anchor point that installs through concrete columns. When pouring columns, insert PVC tube that will allow for insertion, use, and removal of anchor.

1780-36 - 36" ColumnCrete Anchor - reusable two person anchor point that installs through concrete columns. When pouring columns, insert PVC tube that will allow for insertion, use, and removal of anchor.

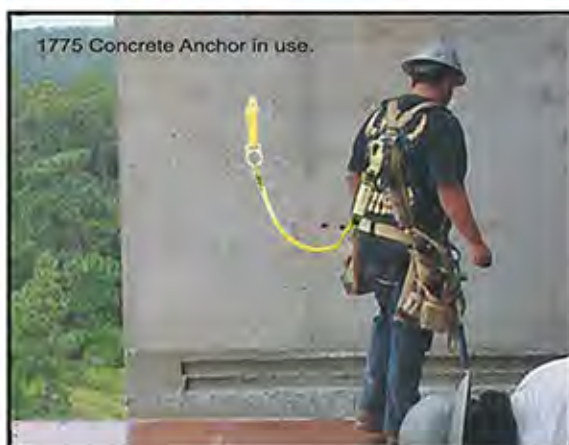

door jamb anchor ** = Quick Ship Item


♦♦ 1785 - The FCP Door Jamb Anchor is designed to be used as a temporary anchor that mounts in door or window openings from 24" to 43" wide. Applications include construction, roof tops with door entrances, elevator shafts, wall openings, emergency & rescue situations, and more. Features one fixed leg and one adjustable leg (with multiple pin sets & adjustable mounting pad), the unit can be sized and secured without the use of tools. The FCP Door Jamb Anchor meets or exceeds all OSHA requirements.



1785 Door Jamb Anchor Installed

parapet wall anchor ** = Quick Ship Item

♦♦ 1789 - The FCP Parapet Wall Anchor is designed to provide a single worker with a portable, temporary anchorage on parapet walls up to 20" thick. Applications include window washing, construction, emergency & rescue situations, and more. Features one padded fixed leg and one padded adjustable leg (with multiple pin sets & adjustable mounting pad), the unit can be sized and secured without the use of tools.

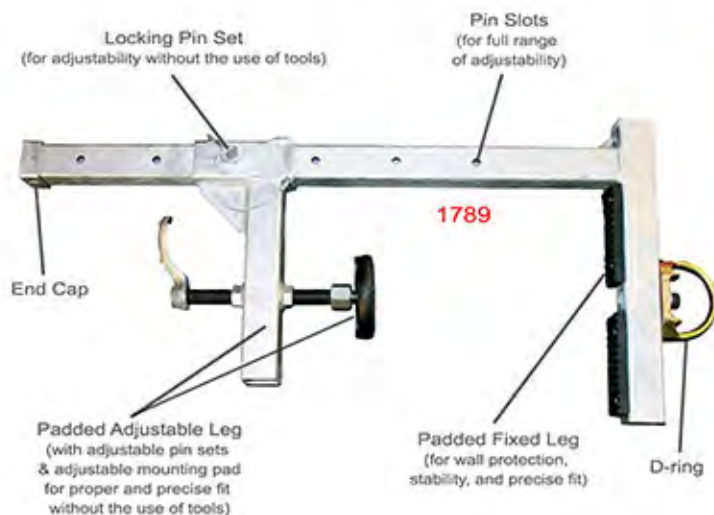

1789 Parapet Anchor Installed

rail anchor

1790 - The rail anchor is designed to meet the needs of those workers that are working on railway line that requires a compliant means to anchor a personal fall arrest system. The anchor allows the user to quickly and easily affix the anchor unit to a rail (55-100 lb rail) and then attach the personal fall arrest system. The unit is designed to allow some horizontal movement by sliding along the rail, but it is not designed to pass rail splice plates.



multi-use anchorage connectors

♦♦ = Quick Ship Item


FCP's multi-use anchorage devices can be used in a variety of applications, however some limitations may apply. FCP's consultations experts are available for inquiries, and can make recommendations concerning the proper anchorage connector for your job.

1824 - 24" Anchor Strap rated to 400 lbs. is designed for use on scaffolding, pipe, or angle iron. Features one-handed operating rebar snap #136 (page 31), and connecting D-ring on the other end, as shown.

♦♦ **1503** - 5" stainless steel wire hook anchor is rated to 400 lbs, and can connect to various approved anchorages including railings, smaller I-beams, angle iron or scaffolding, as shown.

4150 - 4' Boom strap anchor attaches to boom quickly and easily with friction buckle design. Featuring 1 3/4" polyester webbing and coated steel hardware, anchor provides a minimum tensile rating of 5,000 lbs., as shown.

4157 - 5' Boom strap anchor with ratcheting buckle design. Featuring 1 3/4" polyester webbing and coated steel hardware, anchor provides a minimum tensile rating of 5,000 lbs., as shown.

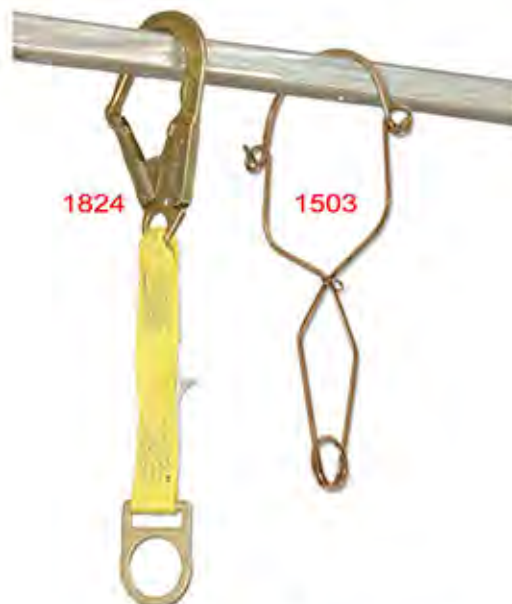

horizontal lifeline systems

Manufactured of synthetic rope or wire rope, FCP's horizontal lifeline systems allow one or two workers (up to 310 lbs. each) to remain tied off while in horizontal transition between two anchor points. The lifelines can be anchored by anchorage tie-off straps, D-bolt anchors, anchor plates, or other compatible connectors. The line tensioner on the rope system is used for line adjustment and proper tension. Wire rope systems use a turn buckle and combination clamp to achieve proper adjustment and tension. All Horizontal Lifeline's come in standard lengths of 30' or 60'.

- RHL-30 - 30' temporary premium nylon rope HLL with tensioner, tie-off straps, and carry bucket.
- RHL-60 - 60' temporary premium nylon rope HLL with tensioner, tie-off straps, and a carry bucket. Lifeline is shown.
- RHLD-30 - 30' temporary, low stretch rope HLL with in line shock absorber, tensioner, tie-off straps, and carry bucket.
- RHLD-60 - 60' temporary, low stretch rope HLL with in line shock absorber, tensioner, tie-off straps, and carry bucket. Lifeline is shown.
- CHL-30 - 30' temporary wire rope HLL with in line shock absorber, tie-off straps, connectors, and carry bucket.
- CHL-60 - 60' temporary wire rope HLL with in line shock absorber, tie-off straps, connectors, and carry bucket. Lifeline is shown.



MiniVerse - horizontal lifeline system

The MiniVerse Series HLL offers ideal protection when an overhead anchorage does not exist. Providing continuous fall protection, with a maximum of 60' between posts, systems can be assembled from 10'-360'. Intermediate posts with a pass-thru bracket allow for a continuous run of the system. A coiled energy absorber helps reduce forces in the event of a fall. Posts are available in 12" & 18". Install as a temporary or permanent system. 3" vent pipe boots will be needed for permanent installation.

Model Number	Description	Weight (lbs.)
Posts		
1760-12-1525	12" Anchor End Post	33
1760-12P	12" Anchor Post with Pass-Through	34
1760-18-1525	18" Anchor End Post	35
1760-18P	18" Anchor Post with Pass-Through	36
1760BP	Backer plate for 1760 series post	22
Lifelines		
TRV-G30	30 ft cable assembly with 1 CHL-CEA and all connecting fasteners	21
TRV-G60	60 ft cable assembly with 1 CHL-CEA and all connecting fasteners	28
TRV-G80	80 ft cable assembly with 2 CHL-CEA and all connecting fasteners	38
TRV-G100	100 ft cable assembly with 2 CHL-CEA and all connecting fasteners	43
TRV-G120	120 ft cable assembly with 2 CHL-CEA and all connecting fasteners	48

*Additional Lengths are available, please contact customer service for price and lead time

* These systems are not covered under FCP's Freight Policy *



MiniVerse system in use.

TEMPORARY HORIZONTAL LIFELINE TRAVERSE

MADE IN
U.S.A.


43

horizontal lifelines - TRAVERSE

TRAVERSE Horizontal Lifeline System

The TRAVERSE Series temporary horizontal lifeline offers ideal protection when an overhead anchorage does not exist, allowing up to two workers to tie off in each span. The TRAVERSE HLL provides continuous fall protection for the length of the line. The 42" tall end posts of the system are offset for ease of use, and can be set up to any cable length with a maximum of 60' between posts. Intermediate posts can be outfitted with a pass-thru/bypass bracket to allow a connector to continuously run the length of the system. Systems can be assembled in many different lengths, from 10'-360' (in 10' increments). Standard systems work on I-beams from 6"-12" wide, and 2 1/4" thick flanges. Options are available for beams up to 36" wide.

- ◆ All steel construction
- ◆ Super easy set-up
- ◆ Standard system fits beam size: 6"-12"w, up to 2 1/4" flange
- ◆ Options are available for beams up to 36"
- ◆ Systems can be assembled in lengths from 10'-360'
- ◆ Allows 2 workers to tie off in each span, 6 workers total
- ◆ Meets or exceeds OSHA & ANSI requirements

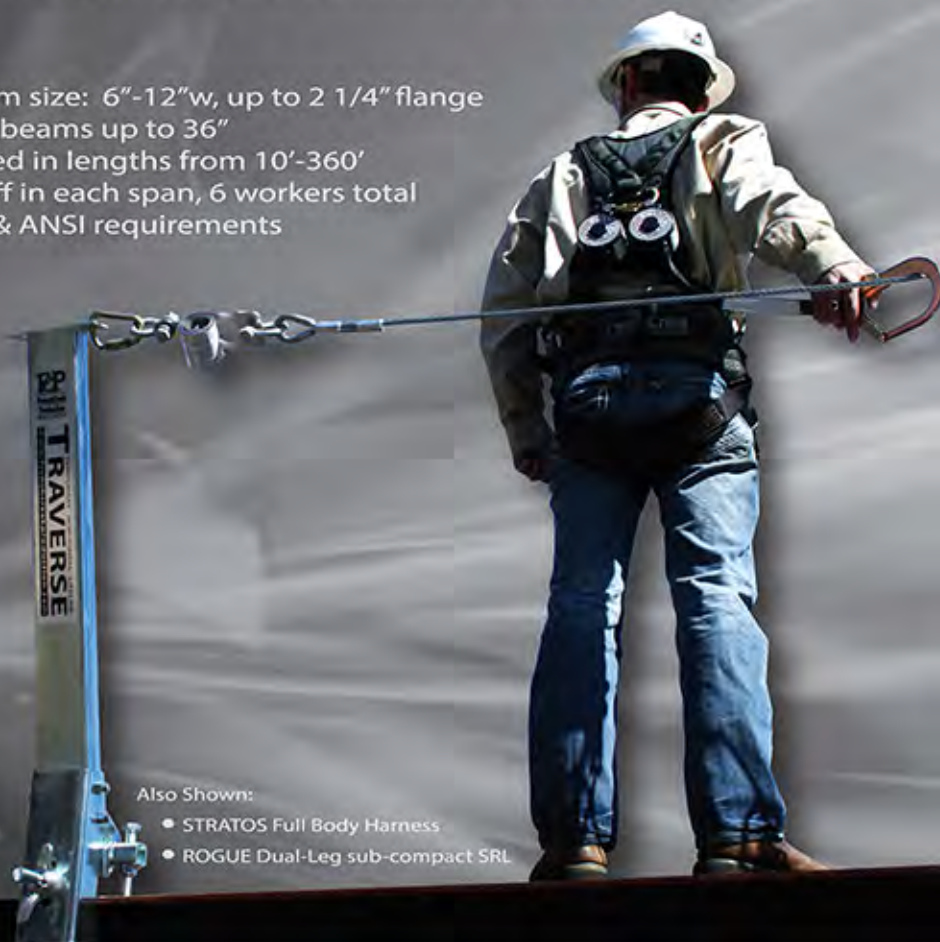


Also Shown:

- STRATOS Full Body Harness
- ROGUE Dual-Leg sub-compact SRL

Model Number	Description	Weight (Lbs.)
TRV20S12	20' system (6"-12" wide Base)	93.9
TRV30S12	30' system (6"-12" wide Base)	94.5
TRV40S12	40' system (6"-12" wide Base)	95.1
TRV50S12	50' system (6"-12" wide Base)	95.7
TRV60S12	60' system (6"-12" wide Base)	99.5
TRV120S12	120' SYSTEM (6"-12" WIDE BASE)	153
TRV-S12	stanchion for 6"-12" wide base	36
TRV-S18	stanchion for 12"-18" wide base	37
TRV-S24	stanchion for 18"-24" wide base	38
TRV-S36	stanchion for 24"-36" wide base	40
TRV-PASS	pass-thru bracket	2

* These systems are not covered under FCP's Freight Policy *

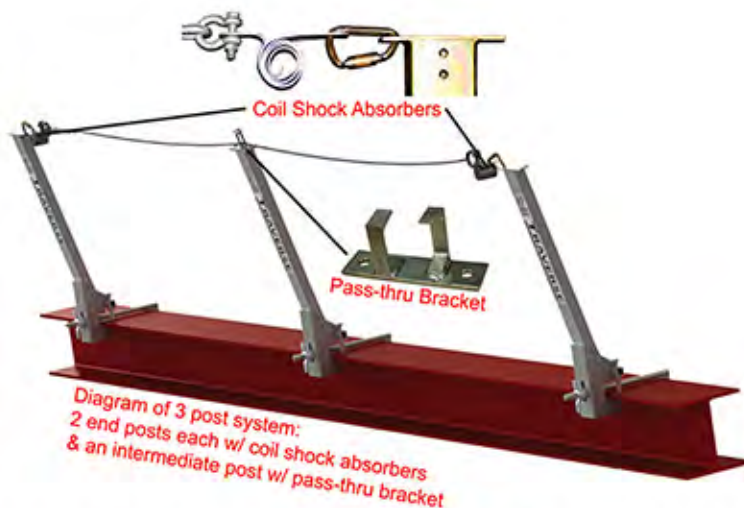

1.877.228.9327

FrenchCreek
FALL SAFETY EQUIPMENT
AMERICAN MADE, AMERICAN OWNED

tower, ladder, rail climbing systems

FrenchCreek's rigid rail climbing systems provide maximum climbing safety for workers in a multitude of applications, such as: towers, antennas, chimneys, stacks, scaffolds, support poles, wind generators, signs, water tanks, dams, silos, shipboard, ladders, and virtually any place that climbing must be done! The rail attaches quickly and easily to any ladder, step iron, or climbing surface. The trolley moves freely along the rail until a slip or fall occurs, when the trolley instantly locks, and the fall is immediately arrested.

♦♦ = Quick Ship Item

Rails:

- 1-1100-AR - Anodized aluminum climbing rail, with all mounting hardware included.
- 1-1105-SS - 316 stainless steel climbing rail with all mounting hardware included.
- 1-1100-CR - Curved anodized aluminum climbing rail, with all mounting hardware included.

Trolleys:

- ♦♦ 2-1200A-AT - Climbing trolley for straight, vertical aluminum rail, as shown.
- 2-1221A-AT - Aluminum climbing trolley for curved/straight climbing rail.
- 2-1223-AT - Aluminum trolley for horizontal rails, as shown.
- ♦♦ 2-1224A-AT - Climbing trolley for stainless steel & aluminum climbing rails.



2-1200A-AT



Ladder / Rigid Rail Climbing System in use



Horizontal Trolley and Rail System

2-1223-AT

tower, ladder, rail climbing systems optional equipment

♦♦ = Quick Ship Item

Removable Extension - The removable extension is used to access a permanent rail system/ladder from the top, when a permanent extension is not possible or desirable. The extension is positioned into the existing permanent rail with a machined high-strength alignment bar and support channel, as shown.

- ♦♦ 5-1501 - 54" removable aluminum extension rail, as shown.
- ♦♦ 5-1502B - 42" removable stainless steel extension rail.

Ladder Rung Clamps - Ladder rung clamps are included with the FCP Rigid Rail Climbing System, however, you have the option to choose the style of ladder rung clamps that will best fit your installation site. Choose from a variety of shapes and sizes, as shown. Hardware to mount to side riser of ladder is also available. Please inquire at time of ordering.



Ladder Rung Clamps



Removable Extension
5-1501



TOWER SAFETY SYSTEMS

flexible cable climbing systems

All FCP flexible cable climbing systems come with: top bracket, bottom bracket with tensioner, rung clamps for up to 1-1/8" diameter rungs, 3/8" galvanized wire-rope lifeline permanently terminated at one end and clips on the other end, and the appropriate amount of cable guides based upon length of system. Standard lengths vary from 20' to 300'.

Mounting hardware is available for other applications besides fixed ladders, and systems can also be made to accommodate tank or roof curvature. Please contact us for custom configurations or applications.

Full body harness and cable grab sold separately.

Vertical Flexible Cable Climbing Systems:

VL-38 When ordering, final product #'s are designated by length, with standard lengths ranging in 10' increments from 20' to 300'. (does not include wire rope grab)

For example:

VL-38-20 - VL-38, 20' in length

VL-38-300 - VL-38, 300' in length

Flexible Cable Climbing System Components:

1401A-38 - Stainless steel trailing wire rope grab for 3/8" wire rope, shock absorber, and carabiner.

VL-CG - Cable guide, fits up to 1 1/8" ladder rung.

C38 - 3/8" wire rope assembly for wire rope climbing systems, permanent eye one end, wire rope clips and thimble other end. When ordering, final product #'s are designated by length, with standard lengths ranging in 10' increments from 20' to 300'.

For example:

C38-20 - C38, 20' in length

C38-300 - C38, 300' in length



VL-38

ladder lock system

♦♦ = Quick Ship Item

♦♦ **4-1000** - FCP's Ladder Lock System is constructed of heavy-gauge, rust proof aluminum. The braces and hardware are made of galvanized heavy gauge steel. Installation is easy (no welding or cutting), just bolt the hardware in place, and secure for a no maintenance, permanent installation that will prevent the ladder from unauthorized use.

Dimensions: 8' high x 36" wide x 1/8" thick.




4-1000

Rescue, Recovery, &

FCP OFFERS EVERYTHING YOU NEED FOR CONFINED SPACES!

FrenchCreek manufactures top quality rescue equipment, complete rescue systems, and accessories to aid in rescue or recovery, all of which meet or exceed the OSHA requirements for confined space rescue! We can also manufacture Custom Products for specific job applications. Please inquire for more information concerning customized products.

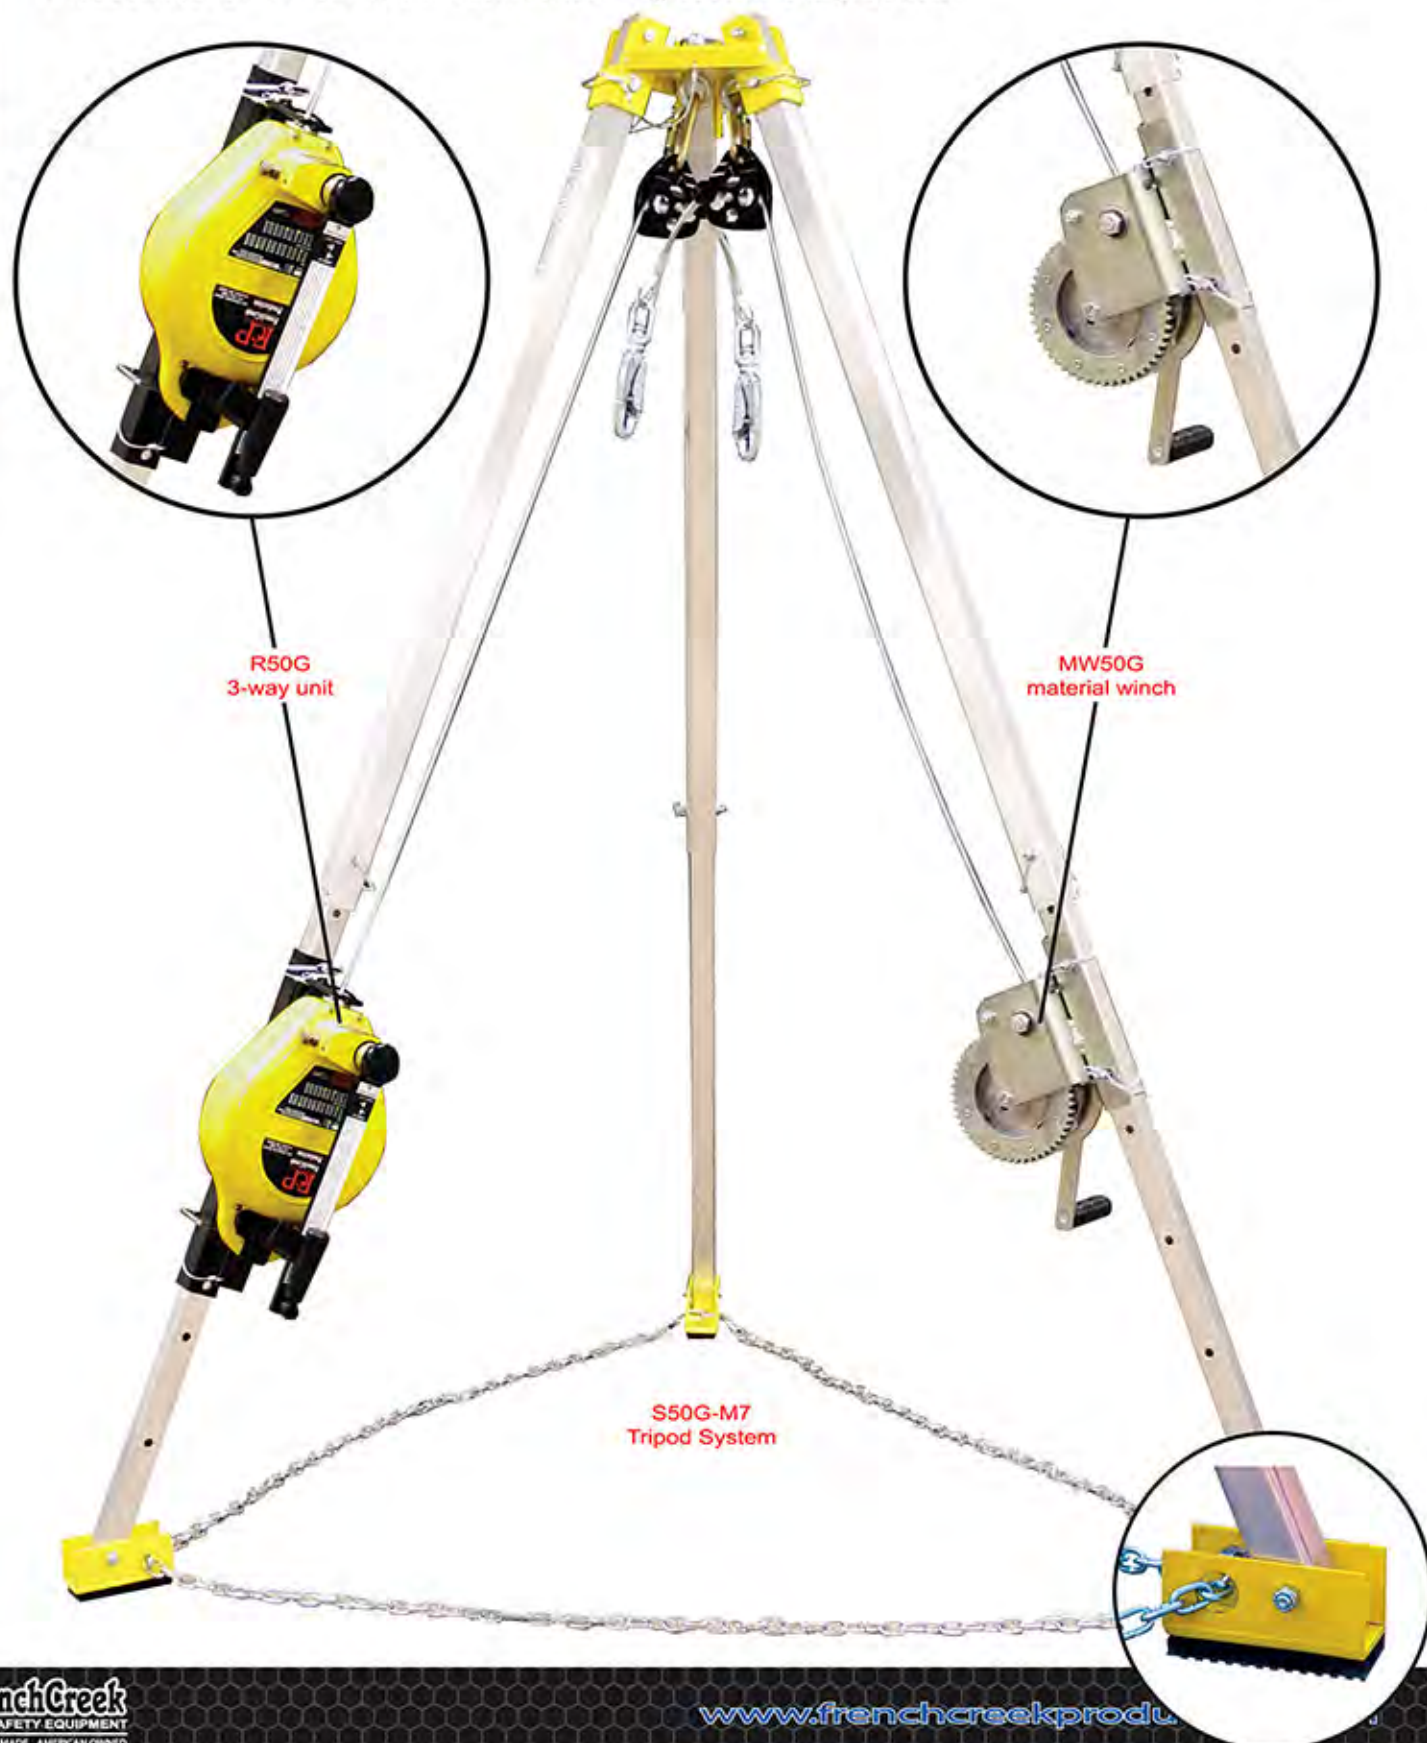

Confined Space Systems

47

rescue, recovery, confined space

confined space systems

♦♦ = Quick Ship Item

R50 Series, 3-way Unit

The R50 Series Unit is a self-retracting lifeline, capable of raising and lowering, for rescue or retrieval. If a worker slips or falls, the unit locks up, arresting the fall. The system can then be activated into winch mode, raising or lowering the worker to safety. The R50 also has a friction brake that prevents the crank handle from free-wheeling while under a load. The unit is manufactured of a rugged, lightweight cast aluminum housing, and includes a mounting bracket for FCP's Tripod or Davit Systems, a #45 split pulley, and carabiner for attaching the lifeline to an anchor such as a tripod. Order the R50 unit by choosing the preferred type of line:

- ♦♦ **R50G** - 50' galvanized wire rope, as shown.
- R50SS** - 50' stainless steel wire rope.
- R50T** - 50' Technora® synthetic rope.

MW Series:

The MW Series winches offer raising and lowering capabilities with a friction brake that prevents the unit from free-wheeling when under a load. Manufactured of a rugged steel frame and drum, the unit includes a #45 pulley, and a carabiner for attaching the line to an anchor such as a tripod. Order the MW unit by choosing the preferred length and type of line:

- ♦♦ **MW50G** - 50' galvanized wire rope, as shown.
- MW50SS** - 50' stainless steel wire rope.
- MW50T** - 50' Technora® synthetic rope.
- MW100G** - 100' galvanized wire rope.
- MW100SS** - 100' stainless steel wire rope.
- MW100T** - 100' Technora® synthetic rope.

TP7 Series Tripods:

FCP confined space tripods are designed to withstand 5000 lbs of vertical load, yet are lightweight and portable, offering single person setup that is quick and easy. TP Series tripods feature adjustable/locking aluminum legs, safety chain, non-slip rubber safety shoes, and two attachment points on the steel head.

- ♦♦ **TP7** - 7' aluminum tripod, 2 attachment points on head.
- ♦♦ **TP9** - 9' aluminum tripod, 2 attachment points on head.

Tripod Systems: (use 9 in place of 7 to order the 9' tripod)

- ♦♦ **S50G-7** - TP7 tripod, R50G rescue unit.
- S50SS-7** - TP7 tripod, R50SS rescue unit.
- ♦♦ **R50G-TP7** - TP7 tripod, R50G rescue unit, 204 bag.
- R50SS-TP7** - TP7 tripod, R50SS rescue unit, 204 bag.
- ♦♦ **S50G-M7** - TP7 tripod, R50G rescue unit, MW50G work winch, as shown.
- S50SS-M7** - TP7 tripod, R50SS rescue unit, MW50G work winch.



Close-up of tripod head attachment points



R50G-TP7 in use

quad pod & davit systems

With the capabilities of an interchangeable arm, the Quad Pod base and Davit bases can be shared between one fall arrest/raising/lowering arm.

Quad Pod System:

FCP's rugged and versatile Quad Pod System can be used as an alternative to a Tripod System. The free standing portable base has adjustable feet and folds for easy carrying. The arm pivots 360° and includes a 50' fall arrest/rescue retractable unit, and a 50' winch unit with raise and lower capabilities.

FCPQ200 - Complete Quad Pod System, as shown.

FCPBOOM - Boom ONLY (does not include a mounting base).

FCPBASE-FOURLEG - Quad Pod 4-leg base ONLY
(does not include Davit arm).

Davit System:

The FCP Davit System bases can be permanently mounted where conventional Tripods or Quad Pod Systems are impractical to use. The arm pivots 360° and includes a 50' fall arrest/rescue retractable unit, and a 50' winch unit with raise and lower capabilities. One interchangeable Davit arm can be used on several permanent bases at different locations.

FCPD300 - Complete Davit System, as shown.

FCPBOOM - Boom ONLY (does not include a mounting base).

FCPD300BASE - Davit Base ONLY (does not include Davit Arm or Riser Pole). Many bases can be purchased & mounted. The Riser Pole & Davit Arm can be interchanged.

FCPRISER - Riser Pole for Davit Base.



FCPD300
Complete Davit System



FCPQ200
Complete Quad Pod System



WE ARE YOUR PREMIER
SOURCE FOR CONFINED SPACE &
RESCUE/RECOVERY SYSTEMS!

controlled descent devices

♦♦ = Quick Ship Item

- ♦♦ **199D** - Manually operated controlled descent device and a 354-2 carabiner, commonly used for:

Suspended Work Positioning:

- window washing, exterior building maintenance, tower erection, bridge construction, etc...

Emergency Self-evacuation:

- escaping from equipment (cranes, buckets, towers, etc...)

Rescue / Recovery Situations

The device can be used with a full body harness or work seat, along with an appropriate fall arrest system. Used on a single 7/16" (11 mm) piece of approved rope (at any length), the operator can install the device at any point along the rope. As the lever on the device is moved, friction on the rope decreases and the device will descend. As a protective measure, when the control lever is unintentionally fully pressed or fully released, as in a panic situation, the friction increases and the descent is stopped.

The controlled descent device can also be inverted and attached to the anchor, to be operated by rescue personnel, to lower another individual. The system comes in standard length increments of 50'.

Controlled Descent Kits - Standard Kits include: desired length of rope with thimble eye on one end, two #354-2 carabiners, 199D controlled descent device, and drawstring carry bag.

199-50 - 50' Kit.

199-100 - 100' Kit.

199-200 - 200' Kit.



rescue, recovery, confined space

system 99

self-raising / self-lowering system

99B - FCP's SYSTEM 99 is a versatile lifting and lowering system that can be used for Utility/Work Systems or for Rescue & Recovery. The SYSTEM 99 is a lightweight, compact universal system that can be set up in a few seconds and performs a variety of functions. With a mechanical advantage of 3:1, it can easily be operated by one person. Should an emergency situation occur, a top-side observer or worker can utilize the system to rescue an incapacitated worker. The lightweight design is extremely beneficial, with a 200 ft. long system weighing in at only 52 lbs! The system comes complete with two carabiners, one for connection to the anchorage, one for connection to the user, plus an ascender handle with lanyard. When ordering, final product #'s are designated by length.

For example:

99B-50 - System 99 in 50' length.

99B-100 - System 99 in 100' length.

99B-200 - System 99 in 200' length.



In use:
- 99B raising/lowering system
- 22030B-BLK Navigator Harness



99B

Remote Prompt Rescue

RPR KITS ARE DESIGNED FOR IMMEDIATE WORKER ASSISTED RESCUE

Time is one of the most valuable assets in any emergency. In an ideal situation, a trained, qualified co-worker can immediately assist another worker in the event of a fall. The system allows a capable worker to attach a raising/lowering system to the fallen workers harness D-ring, providing a means for rescue.

RPR-50 Remote Prompt Rescue Kit

Shown in Action:

- RPCC-12 Extension Rescue Pole
- 99B 50' System 99

Also being used:

- 22850B STRATOS Harness
- RL50G Retractable lifelines
- 1700 Sliding Beam Anchor
- 1702 Sliding Beam Anchor

rpr kits - remote prompt rescue

- RPR-25** - RPCC-12 rescue pole assembly w/ bag & 25' 99B System 99 w/bag (page 49).
- RPR-50** - RPCC-12 rescue pole assembly w/ bag & 50' 99B System 99 w/bag (page 49).
- RPCC-12** - 6'-12' extendable rescue pole, carabiner holding clip, 354-2Z twistlock carabiner w/ 1" gate (page 31), and 12" tagline, and bag. 99B System 99 NOT included.

**confined space accessories**

♦♦ = Quick Ship Item

- ♦♦ **45** - Split pulley, stainless sheave, aluminum sides.
- ♦♦ **354-2Z** - Twistlock carabiner, 1" gate (page 31).
- ♦♦ **354-5** - Twistlock carabiner, 3/4" gate (page 31).
- ♦♦ **204** - 16"x12"x10" hard bottom winch bag with handle and velcro closure.
- 206** - 32" dia. x 66", 7' tripod carrying bag (page 52).
- 207** - Wristlets (pair).
- 207Y** - Wristlets (pair) with yoke.
- 207YL** - Wristlets (pair) with yoke and 25' tagline.
- 702Y** - Web yoke assembly with spreader bar.



flexible access ladders

FCP Flexible Access Ladders are constructed of high strength webbing and 1 1/4" diameter round fiberglass rungs that are 12" wide. Each ladder comes complete with two #354-2 carabiners (page 31). Multiple ladders can be joined together using carabiners, or you can order a longer length, or a custom length.

WL-10 - 10' flexible web ladder, two #354-2 carabiners.
WL-20 - 20' flexible web ladder, two #354-2 carabiners, as shown.

WL-30 - 30' flexible web ladder, two #354-2 carabiners.

WL-40 - 40' flexible web ladder, two #354-2 carabiners.

WL-50 - 50' flexible web ladder, two #354-2 carabiners.

354-2 - Twistlock carabiner 1" gate. Connect ladders, or use to connect to anchorage (page 31).



WL-20



This sample ladder shows how all web ladders can be joined with Carabiners.

carry bags & pouches

FCP offers a wide range of carry and tool bags, from small utility bags for carrying safety glasses or respirators, to larger bags to help transport fall arrest or confined space equipment. If you need a longer bag, shorter bag, personalized silk screening, or any sort of custom bag, please inquire. We may be able to manufacture exactly what you need!

♦♦ = Quick Ship Item

- 203 - 17"x8.5"x8.5" carry bag with handle and zipper closure, as shown.
- ♦♦ 204 - 16"x12"x10" hard bottom carry bag with handle and velcro closure, as shown.
- ♦♦ 206 - 32" dia. x 66", 7' tripod carrying bag, as shown.
- 206-9 - 9' tripod carrying bag.
- 208 - 8.5" dia. x 12" h, drawstring bag, as shown.
- 208-1 - 11" dia. x 14" h, drawstring bag.
- ♦♦ 208Z - 19"x9"x9" carry bag with handle and zipper closure, as shown.
- 211 - 5"x3"x9" lanyard pouch, as shown.
- 220 - 8"x4"x10" nut and bolt bag with tool belt loops and velcro closure.



203



204



206



208



208Z



211

For Firefighters ONLY

PacMule Firefighter Belt

SPECIALLY DESIGNED BY FIREFIGHTERS, FOR FIREFIGHTERS!



This lightweight series of fireman's belts integrates 1 3/4" webbing rated at 10,000 lbs, a 4" Coolmax-lined comfort back pad with 3M Scotchlite highly reflective material, patented drop-down tool D-rings with snap closures to keep D's out of the way when not in use, forged front bailout ring with snap closure, choice of quick release front snap or tongue & grommet front buckle, & two rear carabiner slots for additional gear attachment. Exceeds NFPA standards for escape belts.

***These belts are for Firefighters ONLY, and are NOT intended for generalized fall protection!**



◆ QN4105FB - Fireman's Escape Belt

Adjustable quick-clip waistbelt, 2" forged front bailout D-ring, two 2" drop-down tool D-rings on the hips, all D-rings secure with snap closures when not in use.



◆ QN4107FB - Fireman's Escape Belt

Adjustable quick-clip waistbelt, 2" forged front bailout D-ring, two 3" drop-down tool D-rings on the hips, all D-rings secure with snap closures when not in use.



◆ QL4107FB-18 - Fireman's Ladder Belt

Adjustable quick-clip waistbelt, 1 3/4" front bailout D-ring, 18" tie-off lanyard with 1 7/8" carabiner, two 3" drop-down tool D-rings on the hips, the D-rings and lanyard secure with snap closures when not in use.



◆ QL4109FB-18 - Fireman's Ladder Belt

Adjustable quick-clip waistbelt, 1 3/4" front bailout D-ring, 18" tie-off lanyard with 1 7/8" carabiner, one 3" drop-down tool D-ring & one 2" drop-down tool D-ring on the hips, the D-rings and lanyard secure with snap closures when not in use.



◆ GL4107FB-18 - Fireman's Ladder Belt

Adjustable tongue & grommet waistbelt, 1 3/4" front bailout D-ring, 18" tie-off lanyard with 1 7/8" carabiner, two 3" drop-down tool D-rings on the hips, the D-rings and lanyard secure with snap closures when not in use.



◆ GL4109FB-18 - Fireman's Ladder Belt

Adjustable tongue & grommet waistbelt, 1 3/4" front bailout D-ring, 18" tie-off lanyard with 1 7/8" carabiner, one 3" drop-down tool D-ring & one 2" drop-down tool D-ring on the hips, the D-rings and lanyard secure with snap closures when not in use.

Belts are color coded to size. (All belts shown above are size Large, therefore come in Blue)

SIZE	S	M	L	XL	XXL
WAIST	20-28	28-34	34-40	42-50	52-60
COLOR	GREEN	BLACK	BLUE	YELLOW	RED

Please order according to your actual waist size.

PacMule sizing is based upon waist size, then belts are made larger to fit over turn out gear.



Fall Protection & Confined Space Training

*** TRAINING CAN BE DONE AT OUR LOCATION, OR AT YOURS ***

FCP's fall protection / confined space / rescue training programs provide you and your employees with the timely product and knowledge requirements that they need to be productive, safe and in compliance. We offer a variety of training courses, ranging from strictly classroom discussion courses to courses that involve hands-on training. Training can be done at your facility or ours. With our training, your employees will have the skills and knowledge to be safer and in compliance with today's laws and regulations.



FrenchCreek's Corporate Training Facility



#T101 4 Hour Introduction to Fall Protection

Provides a basic overview of the key OSHA and ANSI requirements. Harness, lanyard, retractable, and anchor point inspection. Proper donning, care, and use will also be discussed, as will common hazards.

#T102 4 Hour Authorized Equipment Inspector

Attendees will experience visual and hands on training regarding the inspection of fall protection materials, components, equipment, and systems. Attendees will learn how to perform a daily inspection and a semi-annual, documented inspection as required by ANSI.

#T103 8 Hour Authorized User (Fall Protection)

Provides an overview of the OSHA and ANSI requirements. Harness, lanyard, retractable, and anchor point inspection. Proper donning, care, and use will also be discussed. Attendees will participate in the selection of proper equipment to eliminate or minimize fall hazards commonly experienced on the jobsite. Basic rescue procedures will be discussed.

#T104 8 Hour Authorized Fall Protection Rescuer

Attendees will review the OSHA and ANSI requirements regarding rescue and fall protection. The FcP #199D and System #99 rescue systems will be explored and used. Attendees will perform hands on rescue of weights, themselves, and others. Note: Attendees should have a first aid/CPR/AED certification or plan on acquiring one.

#T105 8 Hour Confined Space Entrant / Attendant / Supervisor / Rescue

Attendees will review the OSHA and ANSI requirements regarding the safe entry and escape of a confined space. Attendees will use the OSHA flow chart and entry checklist to determine if the space is considered "Permit or Non-permit required". Terminology, equipment selection, duties, installation, inspection, care, and use will be explored. The tripod will be the primary anchor point used, but variations and component options will be discussed. Note: Attendees should have a first aid/CPR/AED certification or plan on acquiring one.

#T106 16 Hour Competent Person (Fall Protection)

The attendees of this course will examine the OSHA construction and general industry standards, along with key letters of interpretation and industry guidelines. This course will highlight the key points of the ANSI construction and general industry standards. Equipment operation, limitations, inspection, care, and use will be discussed in depth. Common hazards will also be discussed, as will the methods to eliminate or control them. Rescue requirements, means, and options will be reviewed.

#T109 Customized Courses

Please contact us with your requirements and we will be happy to furnish you with a quote to your specifications.

OSHA Outreach Training



10 & 30 HOUR CONSTRUCTION COURSES

* TRAINING CAN BE DONE AT OUR LOCATION, OR AT YOURS *

Our courses are designed and provided by instructors who have many years in the fall protection field, so they can relate to the situations that your employees encounter. We can also custom tailor courses to your specific needs or requirements.

Fall Prevention and Protection is one of OSHA's Focus Four and typically the most cited violation.

Our OSHA courses place an emphasis on **Fall Prevention and Protection** from trainers with years of experience in the fall protection field.

In the chart to the right, you will see the OSHA modules we offer and the typical times allotted to each.

Upon successful completion of the course, the attendee will receive a **course completion card from OSHA!**

* Mandatory Topics

SUBJECT	Typical 10-Hour	Typical 30-Hour
Introduction to OSHA	2 *	2 *
Managing Health and Safety		2 *
Fall Protection	2.5 *	4 *
Electrical	1 *	2 *
Caught in	0.5 *	0.5 *
Struck By	0.5 *	0.5 *
PPE	1 *	2 *
Health Hazards	.5 *	2 *
Stairs & Ladders	1	2 *
Confined Space Entry		1.5
Cranes		1
Excavations		1
Fire Prevention & Protection		1.75
Materials Handling		1.5
Motor Vehicles		1
Safety & Health		2
Scaffolds		1.5
Tool, Hand & Power	1	1.75
TOTAL	10	30

Other electives are available.



DVD - guide to fall protection

Professional's Guide to Fall Protection is intended to assist with the development and implementation of a successful fall prevention program. By outlining the key ingredients of a fall protection plan, the guide comprehensively reviews standards, regulations, selection of equipment, and the importance of a proper fall protection plan.

- FPG-1DVD - DVD "Professional's Guide to Fall Protection"



FPG-1DVD



100 North Thirteenth Street • Franklin, PA 16323 • Toll Free: 877.228.9327 • 814.437.1808

fax: 814.437.2544 • fcp@velocity.net • www.frenchcreekproduction.com

AMERICAN MADE. AMERICAN OWNED.

please call or email to locate your nearest FCP distributor

www.frenchcreekproduction.com

POSTAGE



MAIL TO:

FrenchCreek Production's mission is to consistently demonstrate the highest level of quality in every aspect of our business...service to our customers, dedication to our employees, and commitment to our industry. We will retain our established old-fashioned values while exploring new frontiers. By adhering to these principles, we face the future confident that we have earned the loyalty of our customers, employees, and community...Success will ensue.